



#### COMPANY SURGEONS

\*Dr. Roscoe C. Webb, Chief Surg. ....Minneapolis, Minn.  
\*Dr. Ernest R. Anderson, Asst. Chief Surg.  
.....Minneapolis, Minn.  
Dr. D. S. MacKenzie, Sr. ....Havre, Montana  
\*Dr. Chas. Houtz .....Havre, Montana  
\*Dr. D. S. MacKenzie, Jr. ....Havre, Montana  
\*Dr. W. C. Robinson .....Shelby, Montana  
Dr. P. O. Neraal .....Cut Bank, Montana  
Dr. S. D. Whetstone .....Cut Bank, Montana  
Dr. W. Q. Conway .....Kalispell, Montana  
Dr. T. B. Moore .....Kalispell, Montana  
Dr. E. P. Cockrell .....Kalispell, Montana  
Dr. J. J. Mistschke .....Columbia Falls, Montana  
\*Dr. W. W. Taylor .....Whitefish, Montana  
\*Dr. A. T. Lees .....Whitefish, Montana  
Dr. J. B. Simons .....Whitefish, Montana  
\*Dr. R. M. Bowell .....Bonners Ferry, Idaho  
Dr. E. A. Lee .....Newport, Washington  
Dr. Wm. F. Tyler .....Sand Point, Idaho  
Dr. Leslie J. Stauffer .....Priest River, Idaho  
Dr. J. Farrow .....Hillyard, Washington  
\*Dr. H. E. Wheeler .....Spokane, Washington  
\*Dr. E. B. Coulter .....Spokane, Washington  
Dr. L. A. Parsell .....Spokane, Washington

\*Designates also Examining Surgeon.

#### OPHTHALMIC SURGEONS

(Eye Doctors)

Dr. H. D. Huggins .....Kalispell, Montana  
Dr. W. L. Forster .....Havre, Montana  
Dr. Philip B. Greene .....Spokane, Washington

W. C. PRESTON, Chief Dispatcher.

H. J. SURLLES, Trainmaster.

F. H. MOORE, Trainmaster.

J. E. O'BRIEN, Trainmaster.

H. H. HOLMQUIST, Trainmaster.

# GREAT NORTHERN RAILWAY COMPANY

## KALISPELL DIVISION

# TIME TABLE 66

EFFECTIVE 12:01 A. M.  
MOUNTAIN TIME  
AND  
PACIFIC TIME

Sunday, January 1, 1950

MOUNTAIN TIME GOVERNS FIRST, SECOND,  
THIRD, FIFTH AND SEVENTH SUBDIVISIONS.

PACIFIC TIME GOVERNS FOURTH AND  
SIXTH SUBDIVISIONS.

W. R. MINTON, Superintendent.

I. E. MANION, General Manager.

J. B. SMITH, General Superintendent Transportation.

2 WESTWARD

FIRST SUBDIVISION

Station Numbers	Car Capacity		THIRD CLASS		FIRST CLASS				Distances from Havre	Time Table No. 66		Telegraph Calls
	Siding	Other Tracks	657	681	1	41	3	27		Effective January 1, 1950		
			Mon., Wed., Fri.	Daily Ex. Sunday	Streamliner Daily	Daily Ex. Sunday	Daily	Daily		Mountain Time		
Yard	2011		L 6.15Am				L 12.05Pm		L 8.10Am	L 3.30Am	Double Track } HAVRE	HX
<b>TRAINS BETWEEN PACIFIC JCT. AND HAVRE BE GOVERNED BY BUTTE DIVISION TIME TABLE.</b>												
961		29	L 6.30Am				L 12.12Pm		L 8.17Am	L f 3.38Am	4.03	PACIFIC JUNCTION
967	130	7	6.45				12.19		8.24	3.47	9.97	BURNHAM
971	61	14	7.00				12.24		8.30	3.53	14.62	FRESNO
976	130	44	7.20				12.29		8.36	f 4.02	19.38	KREMLIN
986	129	33	7.55				12.41		8.49	f 4.19	29.47	GILDFORD
992	61	30	8.15				12.48		8.56	f 4.30	35.40	HINGHAM
998	142	35	8.35				12.55		9.03	f 4.41	41.37	RUDYARD
1004	126	29	8.55				1.02		9.11	f 4.52	47.61	INVERNESS
1008		32	9.05				1.06		9.16	f 4.58	51.45	JOPLIN
1013	E99 W125 E89		9.20				1.10		9.20	5.02	54.42	BUELOW
1018	W60	66	9.50				1.18		f 9.30	s 5.15	61.52	CHESTER
1024	140	14	10.05				1.24		9.37	5.24	67.06	TIBER
1031	129	20	10.30				1.33		9.46	f 5.36	74.59	LOTHAIR
1037	60	42	11.12				1.40		9.53	f 5.46	80.58	GALATA
1043	141	24	11.30				1.47		10.00	f 5.57	86.60	DEVON
1052	145 E169	70	11.50Am				1.57		10.11	f 6.11	95.34	DUNKIRK
1061	W241	407	12.35Pm	L 8.45Am			2.10	L 10.50Am	s 10.30	s 6.35	104.67	SHELBY
1063			12.40	A 8.55Am			2.13	A 10.53Am	10.33	6.38	106.16	SWEET GRASS LINE JCT.
1074	W122	31	1.10				2.27		10.48	f 6.53	117.70	ETHRIDGE
1082			1.35				2.38		10.58	7.06	125.46	BALTIC
1087	130	186	1.55				f 2.45		s 11.05	s 7.15	128.95	CUT BANK
1093		8	2.15				2.55		11.16	7.26	134.97	GUNSIGHT
1095		30	2.30				3.00		11.22	7.31	138.55	SUNDANCE
1100	W59	7	3.06				3.06		11.29	7.38	143.79	FORT PIEGAN
1108		7	3.25				3.13		11.36	7.45	149.22	MERIWETHER
1112	Yard	630	A 3.45Pm				A 3.20Pm		A 11.45Am	A f 7.55Am	155.19	BLACKFOOT
			9.15 16.78	.10 8.94			3.08 48.24	.03 29.80	3.28 43.60	4.17 36.23		Time Over Subdivision Average Speed Per Hour

Westward trains are superior to eastward trains of the same class, except as follows:  
 No. 1 is superior to all trains; No. 2 is superior to all trains except No. 1.

Conditional stops—  
 No. 1 Cut Bank to discharge revenue passengers from Williston and east, and to pick up passengers for Spokane and west where No. 1 is scheduled to stop.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.





## 4 WESTWARD

## SECOND SUBDIVISION

Station Numbers	Car Capacity		THIRD CLASS		FIRST CLASS					Distance from Blackfoot	Time Table No. 66 Effective January 1, 1950 Mountain Time		Telegraph Calls
	Sittings	Other Tracks	371	683	251	1 Streamliner	3	27	241		STATIONS		
			Daily Ex. Sun.	Tue., Thur., Sat.	Daily	Daily	Daily	Daily	Daily				
1112	Yard	630	.....	L 5.30Am	.....	L 3.20Pm	L 11.45Am	L f 7.55Am	.....	.....	.....	.....	BF
1120	E 124 W 104	76	.....	6.20	.....	3.32	11.58Am	s 8.11	.....	7.29	.....	.....	BG
1128	93	14	.....	6.40	.....	3.40	12.08Pm	8.21	.....	12.47	.....	.....	.....
1130	130	6	.....	6.55	.....	3.46	12.14 684	8.28	.....	16.17	.....	.....	.....
1133	98	150	.....	7.35	.....	3.55	12.25	f 8.39	.....	20.75	.....	.....	MD
1136	112	10	.....	7.45	.....	4.00	12.31	8.45	.....	23.45	.....	.....	.....
1141	E 129 W 112	10	.....	8.00	.....	4.06	12.37	9.04	.....	26.57	.....	.....	.....
1147	E 112 W 130	31	.....	8.39	.....	4.17	12.50	f 9.16	.....	32.83	.....	.....	SM
1153	E 60	9	.....	8.58	.....	4.29	1.02	9.28	.....	39.68	.....	.....	.....
1157	.....	13	.....	9.06	.....	4.35	1.08	9.34	.....	42.71	.....	.....	.....
1161	E 57 E 98 W 136	11	.....	9.15	.....	4.44	1.17	9.43	.....	47.12	.....	.....	.....
1165	.....	212	.....	9.51	.....	4.52	1.25	s 9.51	.....	51.08	.....	.....	SX
1171	.....	13	.....	10.10	.....	5.01	1.35	10.01	.....	56.69	.....	.....	.....
1175	.....	14	.....	10.25	.....	5.09	1.43	10.09	.....	61.82	.....	.....	.....
1181	E 116 W 99	14	.....	10.55	.....	5.18	1.52	f 10.18	.....	66.92	.....	.....	NY
1192	156	96	.....	11.50Am	.....	5.35	4.86 2.10	f 10.37	.....	77.57	.....	.....	BE
1200	60	75	.....	12.20Pm	.....	5.47	2.24	f 10.50	.....	85.45	.....	.....	CM
.....	.....	.....	.....	12.32	.....	5.54	2.31	10.57	.....	89.71	.....	.....	.....
1207	83	188	L	7.15Pm	1.00	L 6.20Pm	5.59	s 2.38	11.01	L 10.20Am	92.64	.....	CF
1210	.....	46	.....	7.25	1.10	f 6.28	6.03	2.45	11.05	f 10.28	95.58	.....	.....
1215	Yard	1473	A	7.45Pm	A 1.30Pm	A 6.40Pm	A 6.15Pm	A 2.55Pm	A 11.15Am	A 10.40Am	100.28	.....	WF
.....	.....	.....	.....	.80 15.28	8.00 12.64	.....	0.20 22.92	2.55 34.38	3.10 31.67	3.20 30.08	0.20 22.92	.....	.....
											Time Over Subdivision	.....	.....
											Average Speed Per Hour	.....	.....

Westward trains are superior to eastward trains of the same class, except as follows:  
No. 1 is superior to all trains; No. 2 is superior to all trains except No. 1.

Conditional stops—

No. 3 Browning, Glacier Park and Belton to discharge revenue passengers from points east of Williston, and south of Shelby and to pick up revenue passengers for Spokane and west where No. 3 scheduled to stop.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

SECOND SUBDIVISION

EASTWARD 5

Time Table No. 66  
Effective January 1, 1950  
Mountain Time

STATIONS	Distance from Whitefish	FIRST CLASS					SECOND CLASS			THIRD CLASS		SIGNS
		2	242	4	28	252	472	486	460	684	368	
		Streamliner								Mon., Wed. Fri.	Daily Ex. Sun.	
	Daily	Daily	Daily	Daily	Daily	Daily	Daily	Daily				
BLACKFOOT	100.28	A 9.45Am		A 7.05Pm	A t 10.30Pm		A 10.55Am	A 6.15Pm	A 2.30Am	A 2.00Pm		KRDNPW IOYXB
BROWNING	92.99	9.36		6.55	s 10.20		10.40	6.00	2.14	1.40		DNPW
TRIPLE DIVIDE	87.81	9.28		6.47	t 10.08		10.30	5.50	2.03	1.00		P
SPOTTED ROBE	84.11	9.21		6.39	t 10.01		10.22	5.42	1.55	12.50		P
GLACIER PARK	79.83	9.14		6.30	t 9.50		10.11	5.31	1.43	12.25		DNPW Y
BISON	78.83	9.09		6.24	t 9.41		10.05	5.25	1.37	12.05Pm		P
RISING WOLF	78.71	9.04		6.19	t 9.35		9.58	5.18	1.30	11.55Am		P DNPW IYX
SUMMIT	67.45	8.54		6.08	t 9.25		9.45	5.05	1.15	11.35		PW
BLACKTAIL	60.65	8.39		5.53	t 9.05		9.00	4.25	12.35	11.00		P
SINGLESHOT	57.87	8.31		5.45	t 8.55		8.46	4.11	12.21	10.40		P
NIMROD	53.16	8.21		5.34	t 8.45		8.28	3.53	12.03Am	10.20		IP KDNPW BOYX
ESSEX	49.25	8.12		5.25	s 8.35		8.12	3.40	11.50Pm	10.00		P
PINNACLE	48.80	8.02		5.15	t 8.25		7.30	3.10	11.20	9.15		P
HIDDEN LAKE	38.76	7.54		5.07	t 8.16		7.13	2.53	11.03	8.55		P
RED EAGLE	33.86	7.45		4.57	t 8.06		6.55	2.35	10.45	8.35		DNIYPW
BELTON	23.71	7.29		4.40	t 7.47		6.30	2.10	10.20	8.00		DNP
CORAM	14.83	7.17		4.27	t 7.33		6.10	1.47	10.00	7.17		DPW
BRENT	10.57	7.11		4.21	7.22		6.02	1.39	9.52	6.43		PI
COLUMBIA FALLS	7.64	7.07	A 11.55Am	s 4.15	7.18	A 7.35Pm	5.55	1.33	9.45	6.35	A 5.30Am	DNJYXP
HALF MOON	4.70	7.03	t 11.47	4.05	7.14	t 7.27	5.45	1.25	9.35	6.12	5.20	P
WHITEFISH		L 6.55Am	L 11.35Am	L 3.55Pm	L 7.05Pm	L 7.15Pm	L 5.25Am	L 1.05Pm	L 9.15Pm	L 6.00Am	L 5.00Am	KRDNPW BOXZI
Time Over Subdivision		2.50	0.20	3.10	3.25	0.20	5.80	8.10	5.15	8.00	0.30	
Average Speed Per Hour		35.89	22.92	31.67	29.52	22.92	18.23	19.40	19.10	12.50	15.28	

Westward trains are superior to eastward trains of the same class, except as follows:  
No. 1 is superior to all trains; No. 2 is superior to all trains except No. 1.

Conditional stops—

No. 4 Belton, Glacier Park and Browning to pick up revenue passengers for points east of Havre where No. 4 scheduled to stop, or points south of Shelby and to discharge revenue passengers from Spokane and west.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

6 WESTWARD

THIRD SUBDIVISION

Station Numbers	Car Capacity		THIRD CLASS			FIRST CLASS			Distance from Whitefish	Time Table No. 66		Telegraph Calls
	Sidings	Other Tracks	687			1 3 27				Effective January 1, 1950		
			Mon., Wed. Fri.			Streamliner				Mountain Time		
									STATIONS			
1215	Yard	1473	L	5.00Am		L	6.15Pm	L	3.05Pm	L	<sup>486</sup> 11.20Am	WF
1220	151			5.20			6.26		3.15	f	11.31	
1227	194	15		5.40			<sup>28</sup> 6.34		<sup>4</sup> 3.28	f	11.39	
1232	E70 W70	26		<sup>2</sup> 6.25			6.41		3.39	f	11.48	KY
1238	141	17		6.50			6.48		3.46	f	11.57Am	
1245	E110 W113	17		7.15			<sup>460</sup> 6.57		3.56	f	12.08Pm	SY
1251	136	15		7.40			7.04		4.04	f	<sup>688</sup> 12.17	
1256		16		8.00			7.10		4.11	f	12.25	FR
1262		71		8.20			7.17		4.19	f	12.33	BA
1267	151	44		<sup>486</sup> 8.45			7.24	f	4.28	s	12.44	KA
1276	W130 E143	144		9.25			7.36	<sup>460-28</sup> 4.40	s	12.57	61.36	RD
1280	187	6		10.10			7.49		4.55	f	1.12	
1282	145	5		11.00			8.03		5.09	f	1.27	
1287	181	4		11.20			8.09		5.15	f	<sup>4</sup> 1.40	VR
1292		35		11.40						f	1.46	WR
1295	139			11.55Am			8.19		5.26	f	1.52	
1302	53	50		12.30Pm			8.29		5.38	f	2.07	
1308	152	3		<sup>4</sup> 1.14			8.36		5.46	f	2.16	
1315	258	165		1.30			8.45	s	5.57	s	<sup>460</sup> 2.30	CK
1326		14		<sup>460</sup> 1.55			9.00		6.13		<sup>28</sup> 2.48	
1332	Yard	845	A	2.15Pm		A	9.15Pm	A	6.25Pm	A	3.00Pm	UX
				9.15 14.55			3.00 44.85		3.20 40.37		3.40 36.70	

Time Table No. 66  
Effective January 1, 1950  
Mountain Time

STATIONS

WHITEFISH  
6.00  
VISTA  
5.81  
LUPFER  
5.46  
OLNEY

8.78  
RADNOR  
7.06  
STRYKER  
6.97  
TREGO  
4.62  
FORTINE  
5.91  
TOBACCO

5.78  
EUREKA  
8.87  
REXFORD  
10.80  
STONEHILL  
11.15  
URAL  
4.95  
VOLCOUR

4.09  
WARLAND  
3.01  
YARNELL  
7.00  
JENNINGS  
5.72  
RIPLEY  
6.84  
LIBBY

11.01  
KOOTENAI FALLS  
7.22  
TROY

DOUBLE TRACK

Time Over Subdivision  
Average Speed Per Hour

Westward trains are superior to eastward trains of the same class, except as follows:

No. 1 is superior to all trains; No. 2 is superior to all trains except No. 1.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

THIRD SUBDIVISION

EASTWARD 7

Time Table No. 66 Effective January 1, 1950 Mountain Time	Distance from Troy	FIRST CLASS			SECOND CLASS			THIRD CLASS		SIGNS
		2	4	28	486	460	472	688		
		Streamliner			Daily	Daily	Daily	Tues., Thurs., Sat.		
<b>STATIONS</b>		Daily	Daily	Daily	Daily	Daily	Daily			
..... WHITEFISH.....	134.55	A 6.55Am	A 3.45Pm	A 6.55Pm	A <sup>27</sup> 11.15Am	A 8.10Pm	A 3.50Am	A 2.15Pm	KRDNPZ BWOXI	
..... VISTA.....	129.15	6.40	3.35	f 6.45	10.55	7.50	3.30	2.00	P	
..... LUFFER.....	122.74	5.81 6.32	3.28	f 6.34	10.43	7.38	3.18	1.45	P	
..... OLNEY.....	117.28	5.46 6.25	3.22	f 6.15	10.32	7.27	3.07	1.30	DNPW	
..... RADNOR.....	111.50	5.78 6.18	3.15	f 6.03	10.20	7.15	2.55	1.10	P	
..... STRYKER.....	104.44	7.06 6.09	3.06	f 5.50	10.05	<sup>1</sup> 6.57	2.40	12.55	DNPWY	
..... TREGO.....	98.47	5.97 6.01	2.57	f 5.40	9.44	6.10	2.18	<sup>27</sup> 12.17Pm	P	
EASTWARD FREIGHT TRK. { FORTINE.....	93.85	4.02 5.54	2.49	f 5.29	9.27	5.50	2.00	11.45Am	DP	
..... TOBACCO.....	87.94	5.91 5.46	2.40	f 5.17	9.05	5.25	1.35	11.05	DNPWI	
..... EUREKA.....	82.16	5.78 5.38	f 2.32	s 5.05	<sup>687</sup> 8.45	5.05	1.15	10.30	DP	
..... REXFORD.....	73.29	8.87 5.27	2.18	s <sup>480-3</sup> 4.40	8.20	<sup>3-28</sup> 4.40	12.50	9.30	DNPWY	
..... STONEHILL.....	62.49	10.80 5.14	2.04	f 4.20	8.02	3.57	12.30	8.50	PW	
..... URAL.....	51.84	11.15 5.01	1.49	f 4.02	7.45	3.35	12.10	8.05	P	
..... VOLCOUR.....	46.39	4.95 4.55	<sup>27</sup> 1.40	f 3.55	7.35	3.25	12.01Am	7.50	DNP	
..... WARLAND.....	41.70	4.69 3.01		f 3.45				7.35	DP	
..... YARNELL.....	38.69	7.90 4.45	1.30	f 3.40	<sup>688</sup> 7.20	3.10	11.46Pm	<sup>486</sup> 7.20	P	
..... JENNINGS.....	30.79	5.72 4.35	1.21	f 3.29	7.03	2.55	11.32	6.50	P	
..... RIPLEY.....	25.07	6.84 4.28	<sup>687</sup> 1.14	f 3.20	6.50	2.45	11.22	6.35	P	
..... LIBBY.....	18.23	5.72 4.20	s 1.05	s 3.10	6.35	<sup>27</sup> 2.30	11.10	6.15	DNPW	
DOUBLE TRACK { KOOTENAI FALLS.....	7.22	11.01 4.06	12.51	f <sup>27</sup> 2.48	6.10	<sup>687</sup> 1.58	10.40	5.20	PI KRDNP BWOX	
..... TROY.....		7.22 L 3.55Am	L 12.40Pm	L 2.35Pm	L 5.50Am	L 1.40Pm	L 10.20Pm	L 5.00Am		
Time Over Subdivision		3.00	3.05	4.20	5.25	6.30	5.30	9.15		
Average Speed Per Hour		44.55	43.61	31.40	24.84	20.70	24.46	14.55		

Westward trains are superior to eastward trains of the same class, except as follows:  
 No. 1 is superior to all trains; No. 2 is superior to all trains except No. 1.  
 SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.



8 WESTWARD

FOURTH SUBDIVISION

Station Numbers	Car Capacity		THIRD CLASS			FIRST CLASS			Distance from Troy	Time Table No. 66		Telegraph Calls		
	Sidings	Other Tracks	689			1 3 27				Effective January 1, 1950				
			Tue., Thur., Sat.			Streamliner Daily Daily Daily				Pacific Time				
										STATIONS				
1832	Yard	845			L 5.00 <sup>am</sup>			L 8.15 <sup>pm</sup>	L 5.30 <sup>pm</sup>	L 2.05 <sup>pm</sup>		TROY	UX	
1840		29			5.35			8.24	5.43	2.17	6.08	6.88	YAKT	
1847	181	22			6.00			8.36	5.56	2.30	13.71	7.03	LEONIA	ON
1853	70	6			6.25			8.48	6.09	2.43	20.04	6.93	KATKA	
1890	132	10			6.45			8.59	6.22	2.55	27.08	6.39	CROSSPORT	
1864	E119 W08	185			7.30			9.05	6.30	3.05	31.84	4.31	BONNERS FERRY	BY
1899	70	18			8.00			9.11	6.38	3.14	36.81	4.97	MORAVIA	
1876	119	29			8.35			9.19	6.47	3.25	42.72	6.41	NAPLES	NA
1888	120	8			9.05			9.28	6.57	3.37	50.11	7.39	ELMIRA	
1890	125	10			9.30			9.36	7.05	3.48	56.93	8.82	COLBURN	
1898	W183 E95	293			9.54			9.46	7.15	4.00	64.78	7.85	SAND POINT	S
1407	70	18			10.15 <sup>460</sup>			9.56	7.27	4.13	67.74	2.96	DOVER	
1410	130	15			11.08 <sup>28</sup>			10.02	7.34	4.21	73.62	5.88	WRENCOE	
1416	71	42			11.28			10.07	7.40	4.28	79.62	5.00	LACLEDE	
1420	70 E125 W69	185			11.45 <sup>am</sup>			10.11	7.45	4.35	86.88	4.72	THAMA	
1427		125			12.30 <sup>pm</sup>			10.19	7.55	4.50	93.44	3.54	PRIEST RIVER	NC
1482		21			12.45			10.23	8.01	4.55	96.95	6.56	NEWPORT	NR
1436	129	15			1.05			10.29	8.08	5.02	101.27	3.51	PENRITH	
1442	120	25			1.30			10.40	8.20	5.13	107.91	4.32	SCOTIA	
1445	70	28			1.45			10.44	8.25	5.18	110.90	6.64	CAMDEN	
1449	123	32			2.05			10.50	8.31	5.25	115.22	2.99	ELK	KE
1456	70	11			2.25			10.58	8.40	5.35	121.72	4.32	MILAN	
1460	64	55			2.35			11.03	8.45	5.41	128.62	6.50	CHATTAROY	
1464		155			2.48			11.08	8.52	5.50	130.21	3.90	DEAN	SF
1469	Yard	3184			A 3.00 <sup>pm</sup>			A 11.15 <sup>pm</sup>	A 9.00 <sup>pm</sup>	A s 6.05 <sup>pm</sup>	134.67	4.59	MEAD	
					10.00			3.00	3.30	4.00		4.46	HILLYARD	HU
					13.47			44.89	33.47	33.67				

AUTOMATIC BLOCK SIGNALS

DOUBLE TRACK

Time Over Subdivision  
Average Speed Per Hour

Westward trains are superior to eastward trains of the same class, except as follows:  
No. 1 is superior to all trains; No. 2 is superior to all trains except No. 1.

Conditional stops—

- No. 3 Priest River to discharge revenue passengers from Fargo and East.
- No. 27 on Flag at Samuels postoffice, 3 miles east Colburn.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.



FOURTH SUBDIVISION

EASTWARD 9

Time Table No. 66

Effective January 1, 1950

Pacific Time

STATIONS

Distance from Hillyard	FIRST CLASS				SECOND CLASS				THIRD CLASS		SIGNS
	4	28	2		486	460	472		690		
	Daily	Daily	Daily	Streamliner	Daily	Daily	Daily		Mon., Wed. Fri.		
	184.67	A 11.35Am	A 1.30Pm	A 2.55Am	A 4.35Am	A 12.35Pm	A 9.05Pm		A 3.30Pm		RDNPW BOX
											P
	127.99	f 11.21	f 1.17	2.41	4.20	12.21	8.50		3.05		DP
	120.96	f 11.08	f 1.04	2.28	4.06	12.07Pm	8.36		2.30		P
	114.03	f 10.55	f 12.51	2.15	3.52	11.54Am	7.54		1.55		P
	107.64	f 10.43	f 12.38	2.03	3.39	11.41	7.41		1.25		P
	103.33	f 10.37	s 12.30	1.57	3.30	11.33	7.32		1.10		DNPWV YXJ
	98.36	f 10.29	f 12.19	1.50	3.21	11.24	7.23		12.19Pm		P
	91.95	f 10.21	f 12.08Pm	1.42	3.10	11.11	7.12		11.50Am		DPW
	84.86	f 10.12	f 11.56Am	1.33	2.57	10.58	6.57		11.15		P
	77.74	f 10.04	f 11.45	1.25	2.44	10.45	6.35		10.45		P
	69.89	f 9.54	s 11.30	1.15	2.30	10.30	6.20		9.54		DNPWV YXZ
	66.93	f 11.22									PV
	61.05	f 9.41	f 11.15	1.04	2.16	10.15	6.06		9.16		P
	60.05	f 9.35	f 11.08	12.58	2.07	10.05	5.57		8.56		P
	51.33	f 9.30	f 11.01	12.53	1.59	9.56	5.49		8.43		P
	47.79	f 9.26	s 10.54	12.49	1.53	9.49	5.43		8.30		D P
	41.23	f 9.18	s 10.40	12.41	1.40	9.35	5.30		8.00		DNPWV
	37.72	f 9.09	f 10.31	12.37	1.28	9.23	5.20		7.35		P
	33.40	f 9.04	f 10.24	12.31	1.19	9.15	5.02		7.20		P
	26.76	f 8.55	f 10.13	12.20	1.01	8.55	4.42		7.00		PW
	23.77	f 8.51	f 10.08	12.16	12.54	8.20	4.36		6.50		PD
	19.45	f 8.45	f 10.00	12.10	12.45	8.10	4.28		6.30		P
	12.95	f 8.37	f 9.50	12.02Am	12.32	7.57	4.16		6.10		P
	9.05	f 8.32	f 9.45	11.57Pm	12.25	7.50	4.10		6.00		DNPXJ
	4.48	f 8.27	f 9.38	11.52	12.15	7.40	4.00		5.45		P
		L 8.20Am	Ls 9.30Am	L 11.45Pm	L 12.05Am	L 7.30Am	L 3.50Pm		L 5.30Am		KRDNPW BOXIYET
		3.15	3.55	3.10	4.30	5.05	5.15		10.00		
		41.66	34.38	42.53	29.93	26.66	25.65		13.47		

Time Over Subdivision  
Average Speed Per Hour

Westward trains are superior to eastward trains of the same class, except as follows:  
No. 1 is superior to all trains; No. 2 is superior to all trains except No. 1.

Conditional stops—

No. 4 Priest River to pick up passengers for Fargo and East, and to discharge silver coin shipments.

No. 28 on Flag at Samuels postoffice, 2 miles east Colburn.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

DOUBLE  
TRACK

AUTOMATIC BLOCK SIGNALS

10 WESTWARD

FIFTH SUBDIVISION

EASTWARD

Station Numbers	Car Capacity		SECOND CLASS					Distance from Columbia Falls	Time Table No. 66 Effective January 1, 1950 Mountain Time					Telegraph Calls	Distance from Kalispell	SIGNS	FIRST CLASS				SECOND CLASS
	Sidings	Other Tracks	369	249	247	245	243		244	246	248	250	370								
			Daily Ex. Sun.	Daily	Daily	Daily	Daily										Daily	Daily Ex. Sun.			
1207	.....	181	L 5.35Am	L 7.40Pm	L 4.20Pm	L 2.38Pm	L 12.01Pm	.....	COLUMBIA FALLS 1.84	CF	14.34	BJ RDNPYX	A 10.05Am	A 2.30Pm	A 4.00Pm	A 6.05Pm	A 7.10Pm				
.....	2	.....	† 7.45	† 4.25	† 2.43	† 12.06	1.84	SOLDIERS HOME 3.44	.....	12.50	.....	† 10.00	† 2.25	† 3.55	† 6.00	.....					
WB5	.....	41	6.00	† 7.52	† 4.32	† 2.50	† 12.12	5.28	LA SALLE 4.63	.....	9.06	P	† 9.53	† 2.18	† 3.48	† 5.53	6.40				
.....	.....	.....	† 8.01	† 4.41	† 2.59	† 12.21	9.91	ROSE CROSSING 4.43	.....	4.43	.....	† 9.44	† 2.09	† 3.39	† 5.44	.....					
WB 14	Yard	831	A 6.45Am	A 8.10Pm	A 4.50Pm	A 3.08Pm	A 12.31Pm	14.34	KALISPELL 4.43	K	.....	BRKDNP JWYXZ	L 9.35Am	L 2.00Pm	L 3.30Pm	L 5.35Pm	L 6.00Pm				
.....	.....	.....	1.10	.30	.30	.30	.30	.....	Time Over Subdivision	.....	.....	.30	.30	.30	.30	1.10					
.....	.....	.....	12.29	28.68	28.68	28.68	28.68	.....	Average Speed per Hour	.....	.....	28.68	28.68	28.68	28.68	12.29					

Westward trains are superior to eastward trains of the same class except:  
Nos. 244, 246, 248 and 250 are superior to Nos. 243, 245, 247 and 249 Kalispell to  
Columbia Falls.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

WESTWARD

SIXTH SUBDIVISION

EASTWARD

Station Numbers	Car Capacity		SECOND CLASS				Distance from Fort Hill	Time Table No. 66 Effective January 1, 1950 Pacific Time					Telegraph Calls	Distance from Bonner's Ferry	SIGNS	SECOND CLASS	
	Sidings	Other Tracks	379					380	Monday and Friday								
			Monday and Friday														
KV26	Yard	37	.....	.....	.....	L 7.30Am	.....	PORT HILL 9.18	.....	26.11	DPO	A 2.45Pm	.....				
KV17	.....	18	.....	.....	.....	8.10	9.18	COPELAND 9.36	.....	16.98	.....	8.20	.....				
KV8	.....	15	.....	.....	.....	8.55	18.54	RITZ 7.01	.....	7.57	.....	8.20	.....				
.....	.....	.....	.....	.....	.....	.....	25.58	SPOKANE INT. RY. CROSSING 0.56	.....	0.56	RDNPW BYXJV	L 12.45Pm	.....				
1304	.....	185	.....	.....	.....	A 9.30Am	26.11	BONNERS FERRY	BY	.....	.....	.....	.....				
.....	.....	.....	.....	.....	.....	2.00	13.05	.....	Time Over Subdivision	.....	.....	2.00	13.05				
.....	.....	.....	.....	.....	.....	.....	.....	.....	Average Speed Per Hour	.....	.....	.....	.....				

Westward trains are superior to eastward trains of the same class.  
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

WESTWARD

SEVENTH SUBDIVISION

EASTWARD

Station Numbers	Car Capacity		SECOND CLASS				Distance from Somers	Time Table No. 66 Effective January 1, 1950 Mountain Time					Telegraph Calls	Distance from Hubbard	SIGNS
	Sidings	Other Tracks	.....					.....							
			.....												
WB25	.....	Yard	.....	.....	.....	.....	.....	SOMERS 4.67	.....	38.84	DWOPX RB	.....			
WB21	.....	7	.....	.....	.....	.....	4.67	BALLS CROSSING 4.95	.....	34.17	JZ	.....			
WB14	.....	Yard	.....	.....	.....	.....	9.82	KALISPELL 9.14	K	29.22	BRKDN PWYX	.....			
WB24	.....	51	.....	.....	.....	.....	18.76	KILA 7.80	.....	20.08	.....	.....			
WB32	.....	25	.....	.....	.....	.....	26.56	ATHENS 5.40	.....	12.28	YW	.....			
WB38	.....	14	.....	.....	.....	.....	31.96	MARION 4.34	.....	6.88	.....	.....			
WB42	.....	24	.....	.....	.....	.....	36.30	BITTERROOT 2.54	.....	2.54	.....	.....			
WB44	.....	43	.....	.....	.....	.....	38.84	HUBBARD	.....	.....	.....	.....			
.....	.....	.....	.....	.....	.....	.....	.....	.....	Time Over Subdivision	.....	.....	.....			
.....	.....	.....	.....	.....	.....	.....	.....	.....	Average Speed per Hour	.....	.....	.....			

Westward trains are superior to eastward trains of the same class.  
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 11 THROUGH 19.

## SPECIAL INSTRUCTIONS

## ALL SUBDIVISIONS

## 1. INSTRUCTIONS GOVERNING THE OPERATION OF STREAMLINER TRAINS.

## CLEARING OF STREAMLINERS.

The time of No. 1 must be cleared by westward first class trains not less than 5 minutes before No. 1 is due to leave the last station where time is shown, and by other westward trains not less than 10 minutes before No. 1 is due to leave the last station where time is shown.

The time of No. 1 must be cleared by eastward first class trains, except No. 2, not less than 10 minutes at all stations, and by other eastward trains not less than 15 minutes.

The time of No. 2 must be cleared by eastward first class trains not less than 5 minutes before No. 2 is due to leave the last station where time is shown, and by other eastward trains not less than 10 minutes before No. 2 is due to leave the last station where time is shown.

The time of No. 2 must be cleared by westward first class trains, except No. 1, not less than 10 minutes at all stations, and by other westward trains not less than 15 minutes.

Within yard limits, yard engines and light engine movements must clear the main track not less than 10 minutes before No. 1 and No. 2 are due to leave the last station where time is shown.

## MAXIMUM SPEED OF STREAMLINERS.

Maximum speed of Streamliner trains, consisting of Streamliner cars hauled by Diesel engines, will be designated by distinctive reflectorized roadway signs in the shape of the letter "D".

Except as directly affected by speed restrictions under Items 1 and 2, All Subdivisions, the "D" signs designate zone speed territories and the numerals thereon indicate in miles per hour the maximum permissible speed which will govern until the next zone is reached.

Between Hillyard and Spokane, Streamliners will also be governed by speed restrictions as indicated under Item 2, First Subdivision, Spokane Division time table.

Where the movement is from a higher to a lower speed zone the zone sign is located approximately one mile from the point where the lower speed becomes effective. When the movement is from a lower to a higher speed zone the zone sign is located at the point where the speed may be increased. Zone territories are listed herein for the convenience of employees.

## MAXIMUM SPEED EXCEPTIONS:

When a Streamliner is detoured over Great Northern tracks outside of regular Streamliner territory, the Streamliner must not exceed the maximum permissible speed for other passenger trains in the territory operated.

When Streamliner is operated against the current of traffic in double track territory the Streamliner must not exceed the maximum permissible speed for other passenger trains. This does not modify Rule 93.

When Streamliner is handled by steam engine, or when other passenger trains are operated on Streamliner schedule, or when train consists of mixed Streamliner and conventional type equipment, the train must not exceed maximum permissible speed for other passenger trains in territory operated.

In event of failure of the electric straight air brakes, or if electric brakes cannot be used on account of cars not equipped with electric straight air brakes, being handled in the train, the automatic air brakes will be used and Superintendent notified. In this event speed of train will not exceed the maximum permissible speed for other passenger trains.

## ZONE TERRITORIES AND MAXIMUM SPEED OF STREAMLINERS.

Between	Zone Territories Between Mile Posts	Maximum Speed MPH	
		Westward	Eastward
Havre	430 and 431	Regular Stop	
	431 " 434 (964.0)	60	60
Pacific Jct.	964.0 " 965.0	40	60
	965.0 " 967.3	60	60
	967.3 " 1014.3	70	70
Buelow	1014.3 " 1036.0	60	60
Lothair	1036.0 " 1036.3	55	55
	1036.3 " 1041.8	60	60
	1041.8 " 1042.6	50	50
	1042.6 " 1065.4	60	60
Shelby	1065.4 " 1066.4	20	20
	1066.4 " 1087.0	55	60
	1087.0 " 1089.5	55	55
Cut Bank	1089.5 " 1091.0	30	30
	1091.0 " 1094.0	50	50
	1094.0 " 1095.5	50	60
Blackfoot	1095.5 " 1111.5	55	60
(1116.5)	1111.5 " 1116.5	55	55
	1116.5 " 1124.0	55	55
	1124.0 " 1125.0	45	45
	1125.0 " 1128.0	55	55
	1128.0 " 1131.2	45	45
	1131.2 " 1137.0	50	50
Glacier Park	1137.0 " 1140.5	40	40
(1138.0)	1140.5 " 1143.6	50	50
	1143.6 " 1144.4	45	45
	1144.4 " 1147.8	50	50
Summit	1147.8 " 1150.4	40	40
(1150.4)	1150.4 " 1157.0	45	30
	1157.0 " 1165.1	35	30
	1165.1 " 1166.1	20	20
	1166.1 " 1169.1	35	30
Essex	1169.1 " 1174.3	45	45
(1169.3)	1174.3 " 1174.4	30	45
	1174.4 " 1180.7	45	45
	1180.7 " 1181.7	35	35
	1181.7 " 1184.7	45	45
Red Eagle	1184.7 " 1185.3	35	45
(1185.0)	1185.3 " 1188.3	45	45
	1188.3 " 1188.9	40	40
Belton	1188.9 " 1196.1	45	45
(1196.1)	1196.1 " 1204.6	60	60
Bridge 140	1204.6 " 1205.1	40	40
	1205.1 " 1208.6	45	45
Brent	1208.6 " 1209.0	45	35
Whitefish	1209.0 " 1219.3	60	60
(1219.3)	1219.3 " 1227.0	50	50
Stryker	1227.0 " 1319.3	55	55
(1249.5)			
Rexford	1319.3 " 1324.0	50	50
(1280.5)	1324.0 " 1328.5	55	55
	1328.5 " 1333.2	50	50
	1333.2 " 1346.0	55	55
Kootenai Falls	1346.0 " 1347.8	45	45
(1346.5)	1347.8 " 1351.5	50	50
Troy	1351.5 " 1353.8	40	50
(1353.8)	1353.8 " 1343.9	55	55
	1343.9 " 1345.5	50	50
	1345.5 " 1348.3	40	40
	1348.3 " 1349.0	35	35
	1349.0 " 1363.1	40	40
	1363.1 " 1368.0	55	55
	1368.0 " 1368.5	15	15
Bonnars Ferry	1368.5 " 1384.3	45	45
(1368.5)	1384.3 " 1391.2	60	60
	1391.2 " 1392.0	55	55
	1392.0 " 1419.8	60	60
	1419.8 " 1420.5	55	55



**ZONE TERRITORIES AND MAXIMUM SPEED OF STREAM-LINERS—Cont.**

Between	Zone Territories		Maximum Speed MPH	
	Between Mile Posts		Westward	Eastward
Thama .....	1420.5 and 1425.0		60	60
Priest River .....	1425.0	1429.0	45	45
(1424.0) .....	1429.0	1430.1	55	55
	1430.1	1431.0	45	45
	1431.0	1439.6	55	55
	1439.6	1444.5	45	45
	1444.5	1445.5	40	40
Milan (1453.0) .....	1445.5	1455.2	45	45
	1455.2	1459.8	50	50
	1459.8	1463.3	60	60
Dean (1463.7) .....	1463.3	1463.8	55	35
	1463.8	1468.5	55	55
	1468.5	1470.5	50	55
Hillyard .....	1470.5	1472.5	50	50
(1472.5)				

**2. SPEED RESTRICTIONS GENERAL.**

(a) Maximum permissible speed of passenger and freight trains, except Streamliners, will be designated by distinctive reflectorized roadway signs set in an upward angle of 45 degrees. Except as directly affected by speed restrictions prescribed below and other speed restrictions covered by Item No. 2 under individual Subdivisions, the 45 degree signs prescribe the speed territories and the numerals thereon indicate in miles per hour the maximum permissible speed which will govern until the next territory is reached.

When the movement is from a higher to a lower speed territory, the 45 degree sign is located approximately one mile from the point where the lower speed becomes effective. When the movement is from a lower to a higher speed territory, the 45 degree sign is located at the point where speed may be increased.

When operating against the current of traffic in double track territory, trains must not exceed the maximum permissible speed prescribed by the 45 degree sign with the current of traffic. This does not modify Rule 93.

When the 45 degree sign has two sets of figures, the numerals preceded with letter "P" apply to passenger trains, except Streamliners, and letter "F" to freight trains.

(b) When passenger trains are handled by freight engines or when freight cars, except cars equipped with passenger trucks and steel wheels, are handled in passenger trains, the train will not exceed maximum permissible speed for freight trains in the territory operated.

(c) Speed shown on Speed Limit Plate on engines must not be exceeded.

(d) Steam engines backing up .....	20 MPH
Steam engines in forward motion running light or with caboose only .....	35 MPH
Diesel and Electric engines light or with caboose only	50 MPH
Trains will run at restricted speed where slides or falling rock are liable to be encountered.	
Trains handling steam derricks, pile drivers, ditchers, cranes, steam shovels, dozers, etc. On Main Line .....	25 MPH
except on 6 degree curves or sharper and on Branch Lines .....	15 MPH
Trains handling ore cars or air dump cars loaded with ore or gravel and scale test car on Main Line .....	30 MPH
except on 6 degree curves or sharper, and on Branch Lines .....	20 MPH
Trains handling carload poles or piling on open cars when operating on double track, siding or other adjacent track must stop meeting or being passed by passenger trains, for other trains reduce speed to....	10 MPH
Unless conditions require a further speed restriction, trains or engines moving against the current of traffic on double track through interlockings .....	15 MPH
Trains or engines moving on main routes actuating points of spring switches .....	35 MPH

Trains or engines moving in facing point direction at spring switches without facing point lock .....	25 MPH
Trains or engines through No. 20 turnouts at: .....	35 MPH
Brent, Whitefish, Vista east switch, Kootenai Falls, Stonehill, Troy end of double track, Yakt, Leonia, Newport west switch, Dean, Hillyard east end yard, end of double track.	

Trains or engines through No. 15 turnouts at: .....	25 MPH
Pacific Junction, end of double track.	
Tiber, east and west siding switch.	
Cut Bank, west end Bridge 68.	
Blackfoot, end of double track.	
Summit, end of double track.	
Nimrod, east and west end of gantlet.	
Red Eagle, end of double track.	
Whitefish, west switch to yard.	
Stryker, east end west siding switch.	
Tobacco, west switch eastward freight track.	
Troy, east end south yard track.	
Elmira, east and west siding switch.	
Laclede, east and west siding switch.	
Trains or engines through all other turnouts .....	15 MPH
All trains passing "19" order board .....	25 MPH

**3. MOVEMENT OF ENGINES DEAD IN TRAINS.**

Class O and larger engines will be placed not to exceed 15 cars behind road engine. In electrified zone only class R engine will be handled on head end, all others near rear.

Class F-8 and smaller engines will be placed next ahead of caboose.

Diesel and Gas-Electric engines 2300-2341 must be handled on rear of train.

Not less than five cars will be placed between all engines.

Trains handling steam engines dead in train with side rods on both sides will not exceed 40 MPH; and without side rods will not exceed 10 MPH.

Trains handling Electric, Diesel and Gas-Electric engines in tow dead in train will not exceed following speeds:

50 .....	35 MPH
75 to 170 .....	45 MPH
175 to 231 and 271 .....	60 MPH
252 to 259-262 to 265-300 to 306-400 to 456 .....	45 MPH
260-261-266 to 270 .....	65 MPH
350 to 376-500 to 512 .....	75 MPH
2300 to 2324 .....	50 MPH
2325 to 2341 .....	60 MPH
5000 to 5008B .....	45 MPH
5010 to 5019 .....	55 MPH

- Under Rule 2, watches that have been examined and certified to by a designated inspector must be used by train dispatchers and yardmen.
- Brakemen with less than one year of experience should not be used as flagmen except in emergency, and then Superintendent will be notified by wire.
- When operating snow machines in non-block signal territory, no train should be permitted to follow closer than a station apart, when that cannot be done, they will be blocked not less than thirty minutes apart.
- After severe blizzard or dirt storm, employes on first train over road must exercise care to avoid accident caused by striking drift without first having drifts faced with hand shovels, cutting in far enough to get beyond the hard snow and giving a perpendicular wall to strike against instead of slope or wedgelike shape. When operating snow dozer, conductor in charge will ride in dozer. On snow and dirt dozers every precaution must be taken to see that cage, flangers and wings clear all obstacles when in service and are properly secured when in through trains, and dozers properly turned. Hand screws must be tightened to raise flangers on dozers as high as possible before making a back-up movement, and must not be released until the dozing work is



- actually to start. Hand screws holding the cage on dozers must be tightened or chains otherwise fastened except when dozer has air in cylinders and is attended by an employe.
8. Loaded dump cars should not be handled on double track after dark, but if necessary to do so, close watch must be kept by trainmen and if a car dumps its load, train must be stopped and protection afforded on the opposite track.
  9. Baggage cars returned deadhead when moved in storage mail service in opposite direction will be accompanied by waybill carrying notation "Deadhead mail car, no material of any character other than U. S. Mail or mail sacks to be loaded in it". Conductors will be held responsible for compliance of waybill instructions.
  10. Trains 1, 2, 3, 4, 7 and 8 carry 100 ft. of steam hose in two 50 ft. lengths equipped with standard Vapor and engine steam dome connections for emergency use in event of steam failure on train engine and non-steam train line engine furnished to handle train. In case of steam line failure on a car, connect both hoses together to run around such car so can be taken to first terminal, using combination standard Vapor and steam dome connections attached to reel. Car must be drained before proceeding.
  11. Unless otherwise provided, when passenger trains are operated against current of traffic on double track or through sidings, Conductors shall notify Railway Postal Clerks; trains shall stop at points where U. S. mail is usually picked up and Conductors are responsible for delivery of mail to Postal car.
  12. Conductors will report by wire all flat spots on wheels of passenger cars. Any cars having flat spots on wheels of more than two and one-half inches long must be set out.
  13. Due to limited overhead clearance at tunnels and structures, employes are warned to keep off top of cars of extreme height and width when handled in trains and yards, also such standing cars in electrified zone, except in emergency. In absence of previous advice on such cars, wire proper officer for instructions.
  14. The Railway Company is responsible for proper handling of perishable freight on road and at points where Western Fruit Express Company does not maintain representatives. Conductors on trains handling perishable freight will ascertain from waybills class of service required and light or extinguish heaters and manipulate vents in accordance with current instructions provided for handling perishable freight issued by the National Perishable Freight Committee.
  15. Placarded loaded tank cars moving in through freight trains must be placed not less than 6th car from engine or caboose; cars placarded "Explosives", "Inflammable", or "Corrosive Liquids", not less than 16th car from road engine, one car from helper engine and 11 cars from caboose. These cars may be handled second car from engine or caboose in local trains. These cars must not be placed in trains next to each other, next to refrigerators equipped with gas burning heaters, stoves or lanterns, or flat cars loaded with logs, poles, lumber, pipe, rails, iron, steel and gondola cars with such lading higher than ends or cars of similar lading that is liable to shift. Carload express shipments of explosives, sealed and placarded, may be handled on passenger trains; LCL shipments may be made in so-called peddler car with messenger in charge when such car is assigned to the handling of express and baggage exclusively, provided shipments are accompanied by authorized representative of United States Government while on trains. Terminals or pick-up points enroute must furnish conductor and engineer Form 250 showing consecutively location in train of all cars placarded "Explosives". At points other than terminals where crews change notice will be transferred from crew to crew. Further details governing handling of Explosives, Inflammable and Corrosive Liquids may be found in I.C.C. Regulations.
  16. Gas-Electric engines must not be fueled while occupied by passengers, or coupled to cars occupied by passengers.
  17. The normal position of a spring switch with facing point lock is identified by a color light type signal displaying a "lunar white" light for train or engine movements in a trailing point direction and for movements in facing point direction when conditions require. The normal position of a spring switch without facing point lock is identified by a triangular yellow target on switch stand with letter "S" in black and "lunar white" light in switch lamp in place of green light displayed in both directions through or over the switch. Trains departing from stations, either from siding or main track, in trailing point movement actuating points of spring switches, a member of crew must observe indication of governing signal in opposite direction after rear end of train has passed through switch to ascertain if switch points return to normal position. If this signal indicates Stop and no immediate train movement or other cause is evident, report the fact to Superintendent from first available point of communication. During and immediately following snowstorms or violent wind storms, spring switches must be operated by hand and relined to normal position before heading out through switch in trailing point movement, actuating switch points, to insure switch is in proper operating condition.
- INDICATORS AT SPRING SWITCHES.**
- A switch indicator, consisting of a single yellow light unit (normally dark) and a switch-key-controller mounted on an iron mast located at clearance point of a siding, must be operated by a member of the crew who, together with engineer, must observe and be governed by its indication before fouling main track or making movement from siding to main track through a spring switch in automatic signal territory, unless the movement is made immediately after an opposing train has passed the switch and Automatic Signal at leaving end of siding indicates "Proceed".
- If indicator displays a yellow light when switch-key-controller is operated, train or engine movement to main track may be made immediately in accordance with train rights and operating rules. Display of yellow light must continue until leading wheels have passed clearance point.
- If indicator does not display a yellow light when switch-key-controller is operated, train or engine movements to main track may be made in accordance with train rights and operating rules, after operating spring switch by hand; waiting three minutes and taking every precaution to provide proper protection.
- To operate Switch Indicator, insert switch key in controller and turn clockwise toward "R", hold a few seconds and remove key. If yellow light is displayed and intended movement is not made, insert switch key in controller and turn counter clockwise toward "N" to restore signal system to normal condition to avoid delays to trains on main track. Switch-key-controller must never be operated toward "N" after having been operated toward "R" if intended movement to main track is to be made.
18. **DRAGGING EQUIPMENT DETECTOR INDICATOR** consists of a single white light unit (normally dark) with circular background mounted on signal or other mast. When white light is displayed, train must be stopped and inspected for dragging equipment. Notify Superintendent from first available point of communication.
  19. Facing point locks on hand operated switches are indicated by a six-inch yellow stripe painted on target staff. Be positive locking device is restored to normal position after using. A running switch must not be made through this type switch.
  20. Under Rule 24, engine number only will be displayed in indicators on engines so equipped. This will also apply when our engines are operating over Northern Pacific tracks. Between Klamath Falls and Chemult, Southern Pacific Rules will govern.
  21. Rule 204 (A) prescribes that copies of train orders will be furnished the rear trainman, such orders will only be furnished on designated: Trains Nos. 1, 2, 3, 4, 7, 8, 9, 10, 28, 29, 30, 355, 358, 359, 360, and sections thereof; also extra passenger train whether operated as section of regular train or as a passenger extra.

22. Air hose on Diesel and Electric engines must be hooked up in hose fastener when not in use.

23. Before leaving any engine terminal enginemen will make proper tests and inspections of water glasses, gauge cocks, water column and injectors, and will not leave the terminal unless all these are in proper working order.

Should enginemen on steam engines find that the water is not in sight in water glass and if water cannot be raised to bottom gauge cock or water glass by opening throttle, on oil burning engines the fire must be extinguished immediately and on coal burning engines the fire must be knocked out or smothered to the extent there will be no damage done to the crown sheet. If water can be raised to the bottom gauge cock or water glass, the water level should be built up by use of the pump, or injector, or both.

Should the low water alarm whistle blow, on any engine so equipped, enginemen will immediately ascertain where the water level is in the boiler by blowing out water glasses and water column, and being sure that water glass mounting valves are open and if water cannot be raised to the bottom gauge cock or water glass by opening throttle, enginemen will be governed by instructions in the preceding paragraph.

24. **ON ENGINES, PASSENGER, FREIGHT AND ORE CARS EQUIPPED WITH ROLLER BEARINGS, EMPLOYEES WILL BE GOVERNED AS FOLLOWS:**

Roller bearing failures on cars or engines equipped with roller bearings in the journal boxes may be due to lack of oil. If the box is not blazing, the oil plug in the cover should be removed and engine or valve oil added. Oil must never be added to a box that is blazing. After the oil has been added and plug replaced, the train should then proceed at reduced speed and care exercised until it is apparent that the box will run cool. If fire develops in roller bearing box on any equipment, it must be closely watched, train moved slowly, and Superintendent notified from first available point of communication, who will prescribe for the movement.

Some engines and cars equipped with roller bearings have heat indicators or stench bombs inserted in the housing of boxes which release a strong pungent odor in the event of excessive journal box temperatures. When this odor is detected train must be stopped at once and box located. Compare the temperature of this box with the other boxes on the same engine or car, check the oil level, and if there is no evidence of overheating, train may proceed, but if the box is overheating, proceed only as instructed in the preceding paragraph.

Ore cars equipped with roller bearings have box cover painted orange, four inch white stripe full length of car beneath stencilled name "GREAT NORTHERN", and "TIMKIN ROLLER BEARINGS" stencilled in black across center of white stripe. Cars or engines equipped with roller bearings must not be allowed to stand alone, even on level track, without brakes adequately applied.

25. **OSCILLATING EMERGENCY RED HEADLIGHT** will be immediately displayed by day or night when a train is disabled or stopped suddenly by an emergency application of air brakes or when engineer and conductor find it necessary to stop train due to some defect which might cause accident, over-running clearance point at meeting and waiting points, end of double track or junction.

Engineer of an approaching train observing display of emergency red headlight must stop before passing and be governed by conditions existing. If operating on adjacent track, ascertain and if safe for passage, then proceed at restricted speed until train is passed.

**OSCILLATING EMERGENCY RED REAR END LIGHT** is of two types—Automatic Control—Portable Manual Control—and except as otherwise provided, must be displayed by day or night each time train stops or is running at speed less than 18 MPH. Automatic Control type automatically functions in this manner. However, when train running at speed above 18 MPH and moving under circumstances in which it might be overtaken by another train or engine and during foggy and stormy weather, light may be operated manually with emergency switch and employes to afford other protection prescribed by rule.

**THE USE OF EMERGENCY RED HEADLIGHT AND REAR END LIGHT DOES NOT IN ANY WAY RELIEVE ENGINEMEN AND TRAINMEN FROM RESPONSIBILITY OF COMPLYING WITH RULES 99 AND 102.**

Emergency red rear end light must be extinguished; when standing at origin and terminus stations of train run; when switching being performed from rear; when on siding to be passed by another train; and, when another train operating on adjacent track is approaching from rear, but not until it is known such train is not on same track.

Portable light must be removed before coupling to rear of such car.

Oscillating white light on engines will be displayed in addition to standard headlight governed by Rules 17 and 17(B). In case of headlight failure it can be used as emergency headlight or as a focus light by push button control if desired.

Enginemen and trainmen on trains and engines equipped with oscillating emergency red lights must familiarize themselves with the operation of the lights.

26. Omitted.

27. Rule D-97 is in effect on this Division.

28. Trains handling flat or skeleton cars loaded with logs must stop at appropriate locations immediately before passing over through-truss bridges or through tunnels and make thorough inspection of all cars of logs in their train, making certain train and lading are in safe condition before proceeding. Extra stops en route will be made for this purpose when in the judgment of the conductor it is necessary. Trainmen must maintain watch behind their trains for logs that may have rolled off cars and if main track is fouled take prompt action to protect trains.

On double track, conductors must notify train dispatcher when logs are to be handled and the log train must be at stop when being passed by other trains, except that when two trains handling logs are passing, either one should stop until the other train has pulled by whether on siding or double track.

On single track, trains handling logs must be at stop when meeting or being passed by passenger and freight trains, except when there are more cars than siding will hold, it is permissible for log train to pull by such train at restricted speed. In double track territory, logs must be secured to cars by chains or cables.

Unless conditions require further speed restrictions, trains handling logs must not exceed 25 MPH.

29. When necessary, for any reason, to set out a car containing mail at any point short of destination, take up with mail clerk in charge and ascertain whether or not there is any mail to be transferred before setting car out.

30. When a derailment occurs, the car or cars involved must be set out at first available point after rerailed, and held until car men sent to make inspection.

31. During freezing weather, local trains will take water daily at all wayside tanks and standpipes. If any ice accumulated, will thaw out with steam hose from engine.

32. Trainmen will see that caboose windows are securely fastened and doors locked before leaving on arrival at terminals.

33. Montana State law provides that it is unlawful to block a public crossing for more than fifteen minutes; Idaho State law, ten minutes; and Washington State law, ten minutes.

34. When necessary to use a chain in handling a car with a bad order drawbar with a Diesel road engine, keep a car between the Diesel and the bad order car whenever possible to do so, in order to prevent bad order car damaging the Diesel.

35. **WHISTLE SIGNALS FOR INTERLOCKING ROUTES:**

Westward main track .....	2 long 1 short
Eastward main track .....	2 long 2 short
Westward siding .....	2 short 1 long
Eastward siding .....	2 short 2 long
Single track .....	4 short
Other diverging track .....	1 short 1 long 1 short



## 36. EMERGENCY TELEPHONES.

Between Blacktail and Nimrod:

Tunnel No. 1 west end .....	Booth
Curve No. 115 west end at Windy Point .....	Booth
Tunnel No. 1 1/2 east end .....	Booth
Snowshed No. 7.....40 ft. from east end on center post.....	Steel Box
Snowshed No. 8.....40 ft. from east end on center post.....	Steel Box
Snowshed No. 9.....40 ft. from east end on center post.....	Steel Box
Curve No. 129 east end .....	Booth
Snowshed No. 10.....40 ft. from west end on center post.....	Steel Box
Snowshed No. 10.7.....40 ft. from west end on cent. post.....	Steel Box
Snowshed No. 11.....40 ft. from west end on center post.....	Steel Box
Curve No. 140 east end .....	Booth
Pinnacle, 1 1/2 miles west of, 500 ft. west Tunnel No. 3.....	Booth
Belton, 3 1/2 miles east of, east end Tunnel No. 3.8.....	Booth
Columbia Falls, 4 miles east of, 500 ft. east Tunnel No. 5.....	Booth
Whitefish, 3 miles west of, west end Curve	

292 ..... Watchman's Cabin

Lupfer, 1 1/2 miles east of, near center Curve

305 ..... Watchman's Cabin

Between Troy and Yakt ..... 10 poles west MP 1341.

Between Yakt and Leonia ..... East portal Tunnel No. 8.

Between Leonia and Katka ..... 13 poles east MP 1353.

Between Katka and Crossport..... West portal Tunnel No. 10.

Curve 593, 2 miles east Cross-

port.

Between Scotia and Camden..... 8 poles east Tunnel No. 11.

## FIRST SUBDIVISION

(Main Line)

## 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Other Passenger	Freight
Westbound Pacific Junction and Shelby .....	60 MPH	40 MPH
Westbound Shelby and Blackfoot .....	55 MPH	40 MPH
Eastbound Blackfoot and Pacific Junction .....	60 MPH	40 MPH

## 2. SPEED RESTRICTIONS.

Bridge No. 1042.3 to a point 1500 feet west, Galata.....45 MPH

Between Blackfoot and Shelby, eastward trains on

westward track .....

40 MPH

Bridge 68, Cut Bank .....

30 MPH

Between Home Signals of Interlocking at Shelby .....

20 MPH

3. TRAIN REGISTER EXCEPTIONS.

Shelby, all trains register by ticket, except Nos. 3, 4, 27, 28,

Third class trains, and trains originating and terminating.

Blackfoot, first class trains register by ticket.

4. CLEARANCE PROVISIONS AND EXCEPTIONS, RULE 83 (B).

(a) Havre, Kalispell Division clearance received at this point will clear train at Pacific Jct.

(b) Pacific Jct., eastward Kalispell Division trains will not require clearance and may proceed to Havre with the current of traffic when signals indicate proceed.

(c) Sweet Grass, Kalispell Division clearance issued to Butte Division train will clear train at Sweet Grass Line Jct.

5. RESTRICTED CLEARANCES.

Shelby, turnouts are located so close together at end of double track and crossover east thereof, also turnout at east end south 3 track and west end industry track that engines cannot safely operate on both turnouts at same time and movements of this kind are prohibited.

6. Eastward freight trains that do not have sufficient time to get into clear at Havre before No. 236 and No. 238 are due out of Pacific Jct. will let No. 2 and No. 4 pass at some point west of Pacific Jct.

7. Shelby, Nos. 42 and 43 must proceed at restricted speed between the end of Sixth Subdivision, and passenger station, and will use first track south of main track.

8. Blackfoot, outgoing crews on through freight trains will not move train until incoming conductor has informed them that inspection completed, unless incoming crew has already tied up.

9. CROSSOVERS ON DOUBLE TRACK.

Facing Point	Trailing Point
Cut Bank	Shelby, west crossover
	Ethridge
	Baltic
	Sundance
	Fort Piegan
	Meriwether

10. SPRING SWITCHES WITH FACING POINT LOCK.

Buelow, East switch eastward siding.

West switch westward siding.

Tiber, East and west siding switch.

Dunkirk, East and west siding switch.

Shelby, East lead switch, west switch westward siding.

Cut Bank, East siding switch.

Normal position is for main track.

11. DRAGGING EQUIPMENT DETECTOR INDICATORS.

Eastward, on signal 967.6 approximately two miles east Burnham.

12. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Shelby .....

End of double track

Cut Bank .....

End of double track

Blackfoot .....

End of double track

Switch at end of double track above points controlled by

operator at depot.

13. SEMI-AUTOMATIC INTERLOCKINGS.

Pacific Junction .....

Junction with Butte Division.

Interlocking operates automatically for all movements with the

current of traffic and for westward Kalispell Division trains

when running against the current of traffic, except for westward

trains destined Great Falls with the current of traffic switches

are controlled from depot, Havre. Switches must be operated by

hand for other movements. See further instructions posted in

box.

14. SWITCH INDICATORS.

Sweet Grass Line Jct., separate indicators are provided for

eastward and westward main tracks. The member of the crew

who is to line switches must first operate push button "R" for

route desired and hold a few seconds. Both trainman and en-

gineer must observe and be governed by the indicator before

lining switches or fouling main track. Push buttons and in-

structions are in iron box locked with a switch lock.

SECOND SUBDIVISION

(Main Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Other Passenger	Freight
Blackfoot and Browning .....	55 MPH	40 MPH
Browning and Summit .....	45 MPH	35 MPH
Summit and Essex .....	45 MPH	25 MPH
Essex and Brent .....	45 MPH	30 MPH
Brent and Whitefish .....	55 MPH	40 MPH

2. SPEED RESTRICTIONS.

Between Summit and Nimrod, westward trains on eastward track:

Passenger .....

30 MPH

Freight .....

20 MPH

Nimrod, through gantlet Bridge 116 .....

20 MPH

Between Summit and Essex, engineers on helper engines moving light must so regulate speed that they can stop short of snow-slides, sluff-offs, or any obstruction on track.

### 3. TRAIN REGISTER EXCEPTIONS.

Blackfoot, first class trains register by ticket.

4. Blackfoot, outgoing crews on through freight trains will not move train until incoming conductor has informed them that inspection completed, unless incoming crew has already tied up.

5. Summit, head brakeman on eastward freight trains arriving with helper engine to cut out at rear, will get off head end and station himself where he can hear whistle signal of helper engine. After helper engine is cut out and into clear on westward main track, helper engineer will signal the road engine to back up and make coupling on to rear of train by sounding three blasts of the whistle. Head brakeman, after hearing whistle signals from helper engine, will give hand signal to road engine to back up. Conductor or rear brakeman will remain on caboose until road engine coupled on to rear portion of train to guard against detached portion running back down grade after helper engine cut off. Eastward freight trains will make prescribed air test after coupling up train and helper engine cut out.

6. Summit, westward freight trains will pull rear end of train clear of end of double track to avoid delay to eastward trains.

7. Westward freight trains will stop engines just east of inspection point sign located 400 feet east of fouling point east end of Nimrod gantlet.

8. Essex, eastward freight trains will cut in helper where it can be cut out of train through crossover to westward main track when train engine is stopped clear of interlocking at end of double track, Summit.

9. Essex, freight trains cutting in helper engine will after pulling head end up, stop and make full application of brakes and leave applied until proceed signal received from helper engine. Helper engineers, after pulling up rear portion and coupling into train, will make full application on rear of train and will leave applied, then cut in air through train. Helper engineer will then close double heading cock before returning brake valve to running position. Helper engineer will then sound signal, Rule 14 (b) and train engine will release brakes. Prescribed air test must be made by train engine before starting, and speed of train departing must allow train crew to make full inspection and safely board train. When helping freight trains engineers will set brake pipe feed valves for 60 pounds.

10. Whitefish, on through passenger trains after spot is made for watering engine, engineer must sound one short blast of engine whistle as signal for carmen to apply blue signal.

### 11. CROSSOVERS ON DOUBLE TRACK.

Facing Point	Trailing Point
Summit	Nimrod
Blacktail	Essex, east crossover
Singleshot	Pinnacle
Essex, west crossover	Columbia Falls, west crossover
Columbia Falls, east crossover	Half Moon

### 12. SPRING SWITCHES WITH FACING POINT LOCK.

Belton, east and west siding switch.  
Normal position is for main track.  
Brent, end of double track.  
Normal position is for westward main track.  
Whitefish, end of double track.  
Normal position is for eastward main track.  
West lead switch.  
Normal position is for main track.

### 13. DRAGGING EQUIPMENT DETECTOR INDICATORS.

Westward, on mast.  
East end Snowshed 4-C, approximately one mile west Blacktail.  
1000 ft. west MP 1190, approximately five miles west Red Eagle.

### 14. MANUAL INTERLOCKINGS.

Red Eagle ..... End of double track.

### 15. MANUAL INTERLOCKING WITH DUAL CONTROL SWITCHES.

Blackfoot ..... End of double track.  
Summit ..... End of Double track.  
East switch westward siding.  
Switch at end of double track and westward siding above points controlled by operator at depot.

### 16. AUTOMATIC INTERLOCKINGS.

Nimrod ..... Gantlet Bridge 116.  
Brent ..... End of double track.  
Whitefish ..... End of double track.

Nimrod:  
Release for normal movements located at home signal on opposite end of gantlet.

Release for movements against the current of traffic located at governing signal.

Westward trains may hold interlocking for a period of six minutes by operating push button at westward home signal. Instructions for operation of release and cranks located in boxes locked with switch locks.

Trains and engines approaching interlocking holding instructions requiring them to wait to permit other trains or engines to move through gantlet will stop before passing "Approach Control Nimrod" sign for track they occupy and wait until their train rights permit them to proceed.

Brent and Whitefish:

Interlockings operate automatically for all movements except from single track to double track against the current of traffic which requires hand operation of switches. Push buttons and instructions for their operation are in iron box locked with a switch lock.

### 17. SWITCH INDICATORS.

Essex, indicators are provided for movements from westward siding to or across main tracks and separate indicators for eastward and westward main tracks. Member of crew who is to line switches must first operate push button "R" for route desired and hold few seconds. Both trainman and engineer must observe and be governed by indicator before lining switches or fouling main track. Push buttons and instructions are in iron box locked with switch lock.

## THIRD SUBDIVISION

(Main Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Other	Passenger	Freight
Whitefish and Warland .....	55 MPH	40 MPH	
Warland and Troy .....	55 MPH	35 MPH	

### 2. SPEED RESTRICTIONS.

Eastward Freight Track between Tobacco and Fortine ..... 30 MPH

### 3. TRAIN REGISTER EXCEPTIONS.

Troy, Nos. 1 and 2 register by ticket.

4. Whitefish, on through passenger trains after spot is made for watering engine, engineer must sound one short blast of engine whistle as signal for carmen to apply blue signal.

5. Trego, do not spot cars within 300 feet of public crossing.

6. Track north of main track extending between Fortine and Tobacco is known as EASTWARD FREIGHT TRACK and must be used by eastward trains only, except first class and passenger extras unless otherwise instructed by train order. Trains using this track will comply with Rule 99 and will display markers as though running against the current of traffic on double track.





end of yard (end of double track, yard lead and spike yard lead) and the single main track between them electrically controlled by operator at depot.

The "home signal limits" (Rule 605) of this interlocking for train and engine movements on main track extend from the westward home signals at east end of yard to eastward home signals at west end of yard.

Trains and engines receiving a proceed indication of the governing home signal will proceed, regardless of class, in accordance with Rule 605, observing all governing signal indications.

Instructions for operation of Electric locks and Releases posted in iron boxes locked with switch lock.

## 12. AUTOMATIC INTERLOCKINGS.

Dean ..... End of double track. Interlockings operate automatically for all movements except from single track to double track against the current of traffic which requires hand operation of switches. Push buttons and instructions for their operation are in iron box locked with a switch lock.

## 13. SWITCH INDICATORS.

Dean, indicator for movements from Spokane Division Fifth Subdivision to Kalispell Division Fourth Subdivision. The member of crew who is to line the switches must first operate push button "R" for route desired and hold few seconds. Both trainman and engineer must observe and be governed by indicator before lining switches or fouling main track. Push button and instructions in iron box locked with a switch lock.

## FIFTH SUBDIVISION

(Kalispell Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Columbia Falls and Kalispell .....	30 MPH	20 MPH

### 2. SPEED RESTRICTIONS.

Bridges 145 and 146, Kalispell .....	10 MPH
Kalispell, over main street crossing passenger .....	5 MPH

### 3. ENGINE RESTRICTIONS.

Engines heavier than H-4 prohibited.

### 4. ENGINE RESTRICTIONS ON INDUSTRY TRACKS.

Kalispell, engines heavier than F-8 not permitted on wye.

## SIXTH SUBDIVISION

(K. V. Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	
Bonnors Ferry and Port Hill .....	20 MPH

### 2. SPEED RESTRICTIONS.

Bridge 1, Bonnors Ferry .....	10 MPH
On curves, all trains .....	10 MPH
On straight track, G-3 and G-4 .....	15 MPH

### 3. ENGINE RESTRICTIONS.

Engines heavier than G-3 and G-4, or engines having axle load over 45,000 pounds prohibited.  
Engines heavier than H-4 ..... Prohibited

### 4. Bonnors Ferry, normal position of junction switch, Sixth Subdivision, is for eastward siding.

## SEVENTH SUBDIVISION

(Somers Line)

### 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between  
Somers and Hubbard, all trains ..... 15 MPH

### 2. ENGINE RESTRICTIONS.

Engines heavier than F-8 prohibited.

## WATCH INSPECTORS

F. A. Black Jewelry Store .....	Havre
Peter Lee Jewelry Store .....	Shelby
Franklin P. Wheeler .....	Kalispell
Leon Reed Jewelry Store .....	Whitefish
R. C. Wickstrom Jewelry Store .....	Bonnors Ferry
A. F. Benson Jewelry Store .....	Newport
H. H. Trowbridge Jewelry Store .....	Spokane (Hillyard)
H. J. March. Nelson Jewelry Company .....	Spokane

Helper crews at Essex compare time at depot, Essex.  
Log local crews may compare time at depot, Troy.


## SPEED TABLE

Time Min.	Per Mile Sec.	Miles Per Hour	Time Min.	Per Mile Sec.	Miles Per Hour
	40	90.0	1	12	50.0
	41	87.8	1	14	48.6
	42	85.7	1	16	47.4
	43	83.7	1	18	46.1
	44	81.8	1	20	45.0
	45	80.0	1	22	43.9
	46	78.3	1	24	42.9
	47	76.6	1	26	41.9
	48	75.0	1	28	40.9
	49	73.5	1	30	40.0
	50	72.0	1	33	38.7
	51	70.6	1	36	37.5
	52	69.2	1	39	36.4
	53	67.9	1	42	35.3
	54	66.6	1	45	34.3
	55	65.4	1	50	32.7
	56	64.2	1	55	31.3
	57	63.1	2	—	30.0
	58	62.0	2	10	27.7
	59	61.0	2	20	25.7
1	0	60.0	2	30	24.0
1	1	59.0	2	40	22.5
1	2	58.0	3	—	20.0
1	3	57.1	3	30	17.1
1	4	56.2	4	—	15.0
1	5	55.3	5	—	12.0
1	6	54.5	6	—	10.0
1	7	53.7	7	—	8.5
1	8	52.9	8	—	7.5
1	9	52.1	9	—	6.7
1	10	51.4	10	—	6.0




BUSINESS TRACKS NOT SHOWN AS STATIONS ON TIME TABLE.

19

Name	Location	Car Capacity	Switch Opens
<b>1st Subdivision</b>			
Montana Power Spur (Three Tracks) .....	4.50 miles east Cut Bank .....	8-10-14	East End
O'Neill Spur .....	1.50 miles west Cut Bank .....	24	East End
<b>2nd Subdivision</b>			
Essex Pit .....	1.85 miles west Essex .....	50	East End ww track
Grizzly Spur (Two Tracks) .....	5.2 miles east Coram .....	23-26	East End
Tie Spur .....	1.38 miles east Coram .....	10	East End
Brent Pit .....	500 feet west Brent .....	35	West End
<b>3rd Subdivision</b>			
Warland Pit (Five Tracks) .....	2.1 miles west Warland .....	148	Both Ends
<b>4th Subdivision</b>			
Bonnors Ferry Lbr. Co. Spur .....	0.75 miles east Bonnors Ferry .....	36	West End
Brown Timber Co. Spur .....	0.6 miles east Colburn .....	20	West End
Emerson Spur .....	0.7 miles east Colburn .....	65	West End
Albeni Falls Spur .....	2.7 miles east Newport .....	22	East End
Davies Spur .....	1.9 miles east Mead .....	34	East End
<b>5th Subdivision</b>			
Northwestern Lbr. Co. Spur .....	1.5 miles east Kalispell .....	63	East End
Yale Oil Co. Spur .....	1.3 miles east Kalispell .....	9	East End
Rocky Mountain Lbr. Co. Spur .....	1.0 miles west Columbia Falls .....	6	East End
<b>6th Subdivision</b>			
Allen's Spur .....	4.3 miles east Bonnors Ferry .....	6	East End
Watson's Spur .....	11.2 miles east Bonnors Ferry .....	2	West End
DeVoignes Spur .....	12.8 miles east Bonnors Ferry .....	4	East End
Camp 5 Spur .....	13.6 miles east Bonnors Ferry .....	11	Both Ends
Seelover's Spur .....	14.9 miles east Bonnors Ferry .....	2	East End
Dehlhom Spur .....	17.1 miles east Bonnors Ferry .....	4	West End
Edward's Spur .....	18.1 miles east Bonnors Ferry .....	8	West End
Camp 8 .....	19.2 miles east Bonnors Ferry .....	18	Both Ends
Harper's Spur .....	21.5 miles east Bonnors Ferry .....	4	West End
Houck's Spur .....	21.8 miles east Bonnors Ferry .....	2	West End
K. V. Farm Spur .....	24.2 miles east Bonnors Ferry .....	5	West End
<b>7th Subdivision</b>			
Northwest Timber Co. Spur .....	1560 feet west Balls Crossing .....	9	East End
Mills Lbr. Co. Spur .....	2200 feet east of East Wye Switch Kalispell .....	3	West End
Batavia Spur .....	4.8 miles west Kalispell .....	8	East End
Kila Ore Spur .....	1.0 mile west Kila .....	15	East End
Giroux Spur .....	1.6 miles west Kila .....	8	East End
Erickson Bros. Spur .....	1000 feet west Balls Crossing .....	4	West End

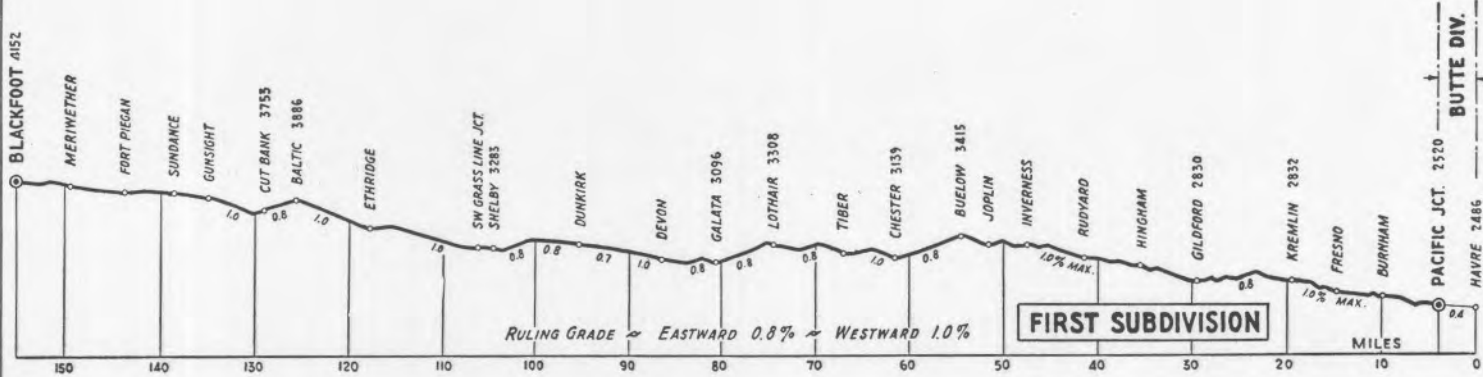

Elevation .....175

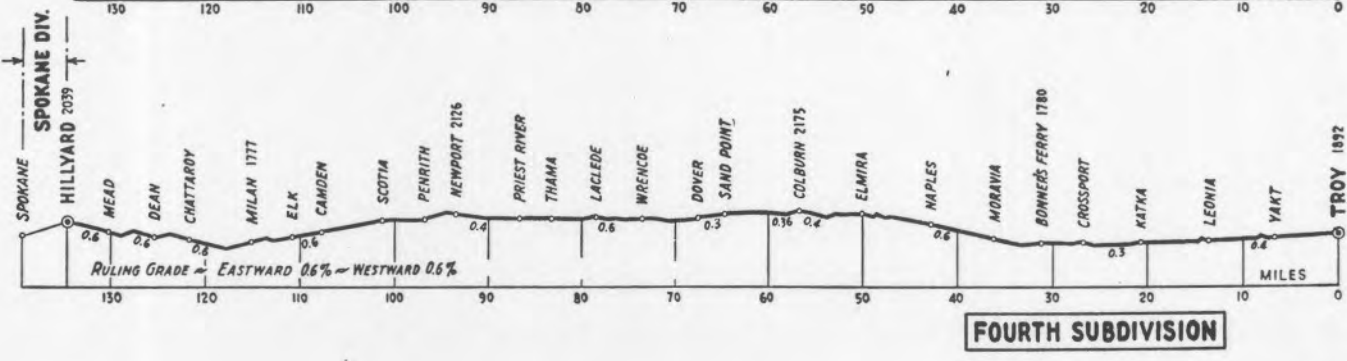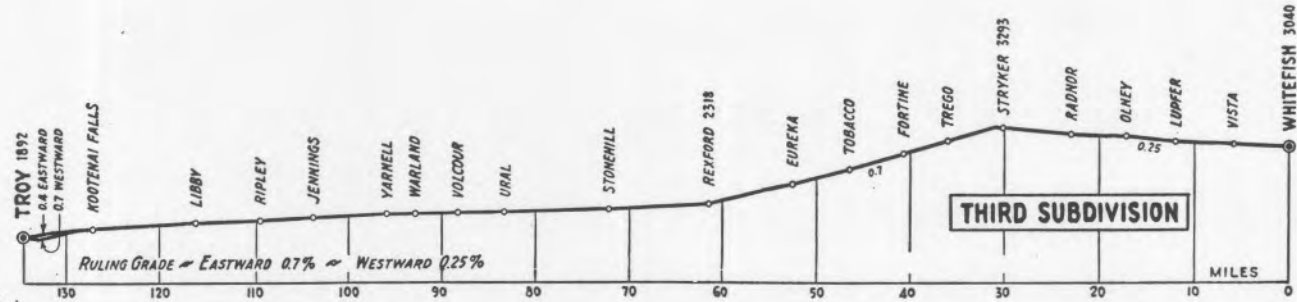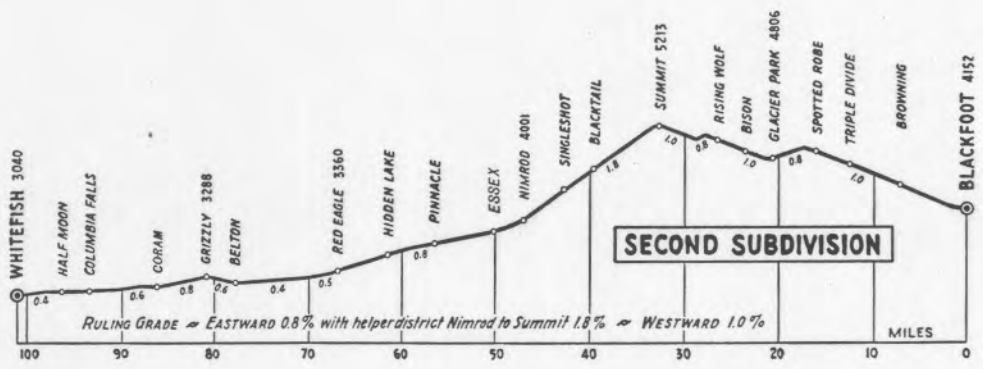

KALISPELL DIVISION