COMPANY SURGEONS *Dr. Roscoe C. Webb, Chief Surg.Minneapolis, Minn. *Dr. Ernest R. Anderson, Asst. Chief Surg. Minneapolis, Minn. Dr. S. D. WhetstoneCut Bank, Montana Dr. Robert D. MacKenzieLibby, Montana *Dr. R. M. BowellBonners Ferry, Idaho Dr. Leslie J. StaufferPriest River, Idaho *Designates also Examining Surgeon.

OPHTHALMIC SURGEONS

(Eye Doctors)

> R. WATSON, Chief Dispatcher. W. J. BARKE, Trainmaster.

F. H. MOORE, Trainmaster.

A. E. CARR, Trainmaster.

T. G. HOOKER, Trainmaster.

O. E. FISHER, Asst. Superintendent.

est River, Idaho Spokane, Wash.

TIME TABLE 82 EFFECTIVE 12:01 A. M.

GREAT NORTHERN

RAILWAY COMPANY

KALISPELL

DIVISION

MOUNTAIN TIME

Sunday, June 10, 1956

MOUNTAIN TIME GOVERNS FIRST, SECOND, AND FOURTH SUBDIVISIONS.

PACIFIC TIME GOVERNS THIRD, FIFTH, SIXTH, SEVENTH, EIGHTH, NINTH AND TENTH SUBDIVISIONS.

H. M. SHAPLEIGH, Superintendent. C. M. RASMUSSEN, Assistant General Manager. T. A. JERROW, General Manager. A. W. CAMPBELL, General Superintendent Transportation.

Scanned from the Michael J Denuty Collection by Dean Ogle.

2	W	/ES	TWAR	D	<u></u>			FIRST	s	UBI	DIVIS	SION					I	EASTW	ARD
-		ar acity	FII	RST CLA	SS		N	OUNTAIN TIM	Ε				FI	RST CLA	١S	s	SEC	OND CL	ASS
ion Numbers		1	31	3	27	Distance from Cut Bank		Time Table No. 82 Effective June 10, 1950	6	graph Calls	Distance from Whitefish	SÍGNS	32	4		28	492	494	490
Station	Sidings	Other Tracks	Daily	Daily	Daily	C Dist		STATIONS	_	Tele	Vh		Daily	Daily		Daily	Daily	Daily	Daily
1087	Yard	393	ь 3.03 р т	L 10.55Am	L 6.40Am	0.00		CUT BANK)	ст	126.40	BDNIK PRX	A 9.45An	A 5.55Pm	A	8.15 Pm	A 10.20Am	A 4.40Pm	A 1.35Am
1093	•••••	8	3.11	11.04	6.48	6.35	TRACK	6.35 gunsight 3.25			120.05	•••••	9.37	5.46		8.05	10.01	4.30	1.22
1095	••••	30	3.15	11.10	6.53	9.60		SUNDANCE		•••••	116.80	P	9.34	5.41		7.57	9.50	4.22	1.17
1100	W 59	7	3.20	11.17	6.58	14.84	DOUBLE	FORT PIEGAN			111.56	P	9.29	5.35		7.49	9.40	4.15	1.07
1106		7	3.26	11.24	7.03	20.27	DO	5.43 MERIWETHER			106.13	P	9.24	5.28		7.42	9.30	4.05	12.57
1112	104 120	280	3.32	11.35	f 7.10	26.24		5.97 BLACKFOOT		BF	100.16	DP Y	492 9.19	5.20	f	7.35	9. 1 9	3.55	12.47
1120	124 104	76	⁴⁹⁴ 3.43	11.50 A m		33.53	l	7.29		BG	92.87	DNP	9.10	5.05	s	7.22	8.50	3.43	12.32
1125	133	15	3.53	12.01Pm		38.92		TRIPLE DIVIDE			87.48	P	9.04	4.58		7.08	8.40	3.25	12.21
1130	47	13	3.57	12.09	7.38	42.48		SPOTTED ROBE			83.92	P	9.00	4.53		7.04	8.30	3.19	12.13
1133	95	126	4.01	12.20	f 7.50	46.87		.GLACIER PARK	s	MD	79.53	DNP Y	8.55	4.45	f	6.55	8.20	3.10	1 2.0 i Am
			4.05	12.20	7.55	49.58	-	2.71 BISON	SIGNALS		76.82	P	8.51	4.33	-	6.43	8,10	3.04	11.55Pm
1136 1141	112	10 10	4.05 4.10	12.28	7.55 492 8.01	52.70		BISUN 3.12 .RISING WOLF			73.70	P	8.46	4.33		6.39	8.10 27 8.01	2.58	11.48
	E 96 W130		4.10 4 4.20	12.50	f 8.12	58.95	··	6.25	BLOCK	 sм	67.45		8.3 7	4.29 31 4.20	F	6.30	7.45	2.45	11.33
114/	E 60	31	4.31	1.02	8.25	65.75		6.80 BLACKTAIL			60.65	P	8.20	4.05	1	6.10	7.15	2.25	11.18
1157		13	4.38	1.02	8.33	68.83	×	3.08 SINGLESHOT	ATIC		57.57	r P	8.12	3.57		6.02	7.03	2.10	11.03
							TRACK	4.42	AUTOMATIC						-				
1161	E 61 E 98		4.45	1.17	8.43	73.25	614	3.90	AU'	•••••	53.15	IP KDNP	8.03	3.48		5.52	6.45	1.55	10.48
	W136		4.52	1.23	s 8.55	77.15	DOUBLI	ESSEX★ 5.66		SX	49.25	BOYX	7.55	3.40	s	5.45	6.25	1.40	10.35
1171	••••	12	5.01	1.34	9.05	82.81	ă	PINNACLE 4.49		•••••	43.59	P	7.45	3.30 3.23		5.30 5.15	5.55 5.38	1.20 1.05	10.05 9.48
1175	E116	16	5.09	1.42	9.15	87.30 93.02		S.72			39.10	P	7.38	3.15		31 5.05	5.18	1.05	9.48
1181	W 99		5.18	1.50	9.25	93.02		10.66		NY	33.38	IYP	7.30	5.15	-	5.05			
1192	156	107	5.35	2.10	f 9.45	103.68		BELTON★		BE	22.72	DNP	7.14	2.55	f	4.45	4.57	12.30	9.05
1200	64	75	5.45	2.19	f 9.59	111.56		CORAM		СМ	14.84	DP	7 .02	2.41	f	4.30	4.40	12.12	8.45
1204	••••	121	5.52	2.25	10.07	115.96	농	CONKELLEY			10.44	PI	6.56	2.31		4.20	4.30	12.02 P m	8.37
1207	83	207	5.57	s 2.30	s 10.20	118.77	5 Track	.COLUMBIA FALLS.		CF	7.65	DNJYXP	6 .52	s 2.27	s	4.15	4.25	11.55Am	8.30
1210	••••	46	6.01	2.33	10.25	121,70	ouble	.HALF MOON			4.70	P KRDN WP	6.48	2.22		4.06	4.15	11.45	8.20
1215	Yard	1648	¦A 6.∣Opm	A 2.40Pm	A 10.35Am	126.40	å	.WHITEFISH)	WF	0.00	BOXZI	L 6.40Am	L 2.15Pm	L	4.00 P m			L 8.01Pm
			3.07 40.56	3.45 33.70	3.55 32.33			Time Over Subdivision Average Speed Per Hour					3.05 40.99	3.40 34.47		4.15 29.66	6.19 20.01	5.10 24.46	5.34 22.71

Westward trains are superior to eastward trains of the same class.

CONDITIONAL STOPS

No. 3 Browning, Glacier Park and Belton, to pick up revenue passengers for Spokane and west, where No. 3 scheduled to stop and to discharge revenue passengers from Great Falls and east.

No. 4 Browning, Glacier Park and Belton, to discharge revenue passengers from Spokane and west and to pick up revenue passengers for Great Falls and points east where No. 4 scheduled to stop.

No. 31 Cut Bank to discharge revenue passengers from Williston and east, and to pick up passengers for Spokane and west where No. 31 is scheduled to stop.

No. 32 Cut Bank to discharge revenue passengers from Spokane and west and to pick up passengers for Williston and east where No. 32 is scheduled to stop.

WESTWARD

SECOND SUBDIVISION

EASTWARD 3

		ar acity	FI	RST CL/	ASS		MOUNTAIN TIM	E	-			FI	RST CLA	SS	SEC	OND CL	ASS.
Station Numbers			31	3	27	Distance from WhiteAsh	Time Table No. 82 Effective June 10, 195	6	Telegraph Calls	Distance from Troy	SIGNS	32	4	28	494	490	492
Stat	Sidings	Other Tracks	Daily	Daily	Daily	Visit Visit	STATIONS		Tele	Disto		Daily	Daily	Daily	Daily	Daily	Daily
1215	Yard	1648	L 6.15 Pm	L 2.50pm	L 10.50Am	0.00	WHITEFISH		WF	134.48	KRDNPZ BWOXI	a 6.35 _{Am}	A 2.00Pm	a 3.50pm	A 10.45 Am	A 6.10 Pm	A 3.50A
1220	151		6.22	2.57	10.59	5,39	VISTA 6,42		• • • • •	129.09	P	6.25	1.50	3.40	10.30	5.50	3.30
1227	196 E 70	15	6.30	3.05	11.09	11.81	LUPFER 5,46		• • • • •	122.67	P	6.16	1.42	3.32	10.20	5.40	3.18
1232		26	6.35	3.10	f . 9	17.27	OLNEY		КҮ	117.21	DP	6.09	1.35	f 3.24	10.10	5.30	3.07
1238	141	17	6.41	3.16	11.28	23.04	5.77 RADNOR			111.44	P	6.02	1.28	3. 1 6	10.00	5.20	2.55
1245	W106 E113	17	6.49	3.25	f .38	30.11	7.07 STRYKER★		SY	104.37	DNPY	5.54	1.20	r 3.05	9.50	5.10	2.40
1251	136	15	6.56	3.32	f 1.47	36.08	5.97 ••••••••••••••••••••••••••••••••••••	1 1	• • • • •	98.40	. P .	5.46	1.12	f 2.53	9.33	4.59	2.18
1256		40	7.01	3.37	f 11.56	40.70	Eastward (FORTINE. Freight { 5.92	ALS	FR	93.78	DP	5.39	1.06	r 2.47	9.15	4.50	2.00
1262	• • • • •	76	7.08	3.44	12.05Pm	46.62	Freight 5.92 Trk. (TOBACCO.	SIGNALS	••••	87.86	PI	5.31	12.59	2.39	8.55	4.40	1.35
		59	7.16	3.52	s 12,18	52.38		00CK	КА	81.10	DNP	5.23	12.53	s 2.30	8.30	4.25	1.15
1276	W130 E143	189	7.28	490 4.05	s 12.43	61.26	REXFORD		RD	73.22	DNPY	5.12	12.43	s 2.15	8.05	4.05	12.50
1280	128	10	7.41	4.18	12.56	72,14	STONEHILL	11 1	•••••	62.34	P	4.59	12.32	1.58	7.45	3.25	12.30
1282	141	5	7.52	4.29	f 1.10	83.20	URAL 4.95	AUTOMA	•••••	51.28	Р	4.46	12.20	f 1.45	7.25	3.10	12.10
1287	131	4	7.58	4.35	1.16	88.15	VOLCOUR	AUT	VR	46.33	DNP	4.40	12.15	1.40	7.15	3.00	12.01A
1292					f 1.23	92.83	4.68 WARLAND 3.14		:	41.65	P			r 1. <u>3</u> 4			
1295	139		8.09	4.46	1.28	95.97	YARNELL 7.78		•••••	38.51	P	4.31	12.06Pm	²⁷ 1.28	6.59	2.50	11.46 P r
1302	·····,					103.75	JENNINGS 5.33		•••••	30.73	P						
1308	152	3	8.26	5.05	1.45	109.08	RIPLEY		•••••	25.40	P	4.14	11.49Am	1.10	6.35	2.35	11.22
1315	265	175	8.35	s 5.15	s 1.55	116.30	LÍBBY★		СК	18.18	DNPZ	4.05	s 11.40 s	s 12 . 59	6.20	2.25	11.10
1326	178	14	8.50	5.30	490 2.09	127.31	11.01 KOOTENAI FALLS. 7.17			7.17	P KRDNP	3.51	11.24	12.44	5.50	2.09	10.40
1332	Yard	917	a 9.05 Pm	a 5.45pm	a 2.20pm	134.48			UX	0.00	BXIY	ь 3.40 A m	l . 5 Am	⊾ 2 . 35 P m	l 5.35Am	L 1.30pm	ь 10.20 р г
			2.50 47.46	2,55 46.05	3.30 38.42		Time Over Subdivision Average Speed Per Hour	-				2,55 46.11	2.45 35.87	3.15 41.32	5.10 26.03	4.40 28.82	5.30 24.45

Westward trains are superior to eastward trains of the same class.

No. 3 Eureka to discharge revenue passengers from Great Falls and east, and to pick up revenue passengers for Spokane and west where No. 3 scheduled to stop.

No. 4 Eureka to pick up revenue passengers destined Great Falls and east where No. 4 scheduled to stop, and to discharge revenue passengers from Spokane and west.

4	W	ES1	TWARI)			T	HIRD S	SUBDI	VISION	[WESTWA	RD
	Cape	ar ocity					FIRST	CLASS						Time Table No. 82	
Station Numbers							31	45 s. p. & s. No. 3	3	27	5	1 S. P. & S. No. 1	ce from	Effective June 10, 1956 PACIFIC TIME	Telegraph Calls
Station	Sidings	Other Tracks					Dally	Daily	Dally	Daily	Daily	Dally	Distance Troy	STATIONS	Telegr
1332	Yord	917					L 8.05Pm		L 4.50pm	L 1.25Pm			0.00	TROY *)	U
1340	142	19	- 1				8.15 492 8.26		5.00	1.35			6.69	6.69 	••••
1347	128	24					8.26		5.11	1.46			13.71	LEONIA 6.83	
1353	70	6					8.38		5.23	1.58			20.54	KATKA	
1360	132	10					8.49		5.34	2.09			27.00	CROSSPORT	
1364	E119 W68	148					8.55		1 5.40	s 2.20			31.31	4.31 BONNERS FERRY *	8
1369	70	18					9.01		5.46	2.27			36.27	4.96 MORAVIA	
376	119	29					9.10		5.55	1 2.37			42.68		N
383	130	32					9.19		6.04	1 2.48			50.07	7.39 ELMIRA	
390	125	11					9.27		6.11	r 3.00			56.89	6.82 COLBURN	
398	E133 W105	262					9.37		t 6.19	s 3.15			65.23	SANDPOINT ★	
							• • • • • • • • • • •			f 3.24			67.70	5.88 C	2
407	70	13					9.48		6.32	3.33			73.58	WRENCOE	
410	130	15	• • • • • • • • • • • •			•••••	9.54		6.38	3.43	•••••	•••••	78.58	LACLEDE	<u> </u>
416	71	42					10.00		6.44	3.49			83.30		
420	70	103					10.04		6.48	s 3.55			86.83	3.53 PRIEST RIVER	
427	122	247					10.14		6.59	s 4.10			93.40	NEWPORT +	
436	129	15					10.24		7.09	4.25			101.20		¥
442	120	25					10.33		7.20	4.25 492 4.37			107.79	6.59 CAMDEN	
1445						1.15-	10.38		7.25	t 4.45			110.77	2.98 ELK	
1449	70 123	28 32	•••••	•••••	•••••		10.38	•••••	7.25	t 4.45 t 4.56		•••••	115.09	4.32 MILAN	
456	70	- 32 - 11	• • • • • • • • • • •		•••••	•••••	10.43	•••••	7.40	f 5.07	• • • • • • • • • • • •	•••••	121.58	6.49 CHATTAROY	
450	64	53				•••••	10.49	********	7.45	t 5.15			125.46	3.88 DEAN	
1464	04	155	• • • • • • • • • • •	•••••		• • • • • • • • • • • • • • • • • • • •	11.00	•••••	7.52	f 5.22			130.05	4.59 MEAD.	
		100							1.72				100.00	5	
469	Yard	3184					1110		8.00	f 5.35			134.58	4.53 HILLYARD ★	1
472	Yard						11.20		8.10	5.45			138.18	U. P. R. R. Crossing	_
473	Yard	644					A 11.25	L 9.45Pm	A 8.15	A 5.50Pm	L 8.304	L 11.59Pm	139.35	0 1.17 SPOKANE *	
477	69	26					A 1.25 L 1.55Pm A 2.0 Am	A 9.51Pm	T 0.00			A 12.04Am	142.09	FORT WRIGHT	F
-															= ==
							3.56 36.12	.06	4.15 33.74	4.25 31.55	.05	.05		Time Over Subdivision Average Speed Per Hour	

Westward trains are superior to eastward trains of the same class.

CONDITIONAL STOPS


No. 27 on Flag at Samuels postoffice, 2 miles east Colburn. No. 3 Priest River to discharge revenue passengers from Fargo and east. No. 3 Newport to receive revenue passengers for Everett or Portland and beyond and to discharge revenue passengers from Great Falls and east.

EASTWARD	1 1				2 501	DIVISI					EAGI	WARD	5
Time Table No. 82					FIRST	CLASS	24			SEC	OND CL	ASS	
Effective June 10, 1956 PACIFIC TIME	Distance from Fr. Wright	SIGNS	46 S. P. & S. No. 4	4	28	6	2 S. P. & S. No. 2	32	494	490	492		
STATIONS	Diston Fr. W		Daily	Daily	Daily	Daily	Dally	Dally	Daily	Daily	Daily		
TROY *	142.09	RONPBKXIY		A 10.10Am	A 11.30A			A 2.40Am	A 4.35Am	A 12.30Pm	A 9.05Pm		
6.69 YAKT	135.40	•		10.00	11.20			2.24	4.20	12.20	8.50		
7.02 LEONIA	128.38			9.49	11.10			2.11	4.06	12.05Pm	8.26		
6.83 KATKA	121.55			9.39	10.59			1.59	3.52	11.50Am	7.54		
6.46 CROSSPORT	115.09	P		9.29	10.46			1.48	3.39	11.35	7.41		
BONNERS FERRY	110.78	DNPVYXJ		1 9.24	s 10.40			1.42	3.30	11.25	7.30		
4.96 MORAVIA	105.82	Р		9.16	10.32			1.35	3.21	11.15	7.18		
NAPLES *	99.41	DP		9.09	t 10.25			1.27	3.10	11.05	7.08		
7.39 ELMIRA	92.02			9.01	f 10.17			1.18	2.57	10.50	6.54		
6.82 COLBURN	85.20	P		8.53	f 10.09			1.10	2.44	10.35	6.42		
8.34 SANDPOINT★	1	DNPVYXZ		f 8.44	s 10.00			1.00	2.30	10.20	619		
	74.39	PV		8.40	t 9.52								
500				8.33	9.45			12.49	2.16	10.06	5.55		
LACLEDE	63.51			8.27	1 9.39			12.43	2.07	9.57	5.47		
	58.79	P		8.22	9.32			12.38	1.59	9.49	5.41		
3.53 PRIEST RIVER	55.26	DP		8.18	s 9.27			12.34	1.53	9.43	5.35		
NEWPORT +	48.69	DNPOVX		8.10	s 9.15			12.26	1.40	9.30	5.25		
7.80 SCOTIA	40.89	P		8.02	490 9.01			12.16	1.19	9.01	5.00		
CAMDEN	34.30	P		7.53	8.52			12.05	1.01	8.36	4.37		
2.98 ELK	31.32			7.49	f 8.47			12.01 Am	12.54	8.29	4.27		
4.32 MILAN	27.00			7.44	f 8.41			11.55Pm	12.45	8.20	4.19		
CHATTAROY	20.51			7.37	f * 8.33			11.47	12.32	8.07	4.07		
3.88 DEAN	16.63	DNPXJI		7.32	1 8.28			11.42	12.25	8.00	4.00		
4.59 MEAD	12.04	P		7.27	f 8.21			11.36	12.15	7.50	3.50		
4.53 HILLYARD★ 3.60	7.51	BRKDNPT WOIXZY DNPIMV		7.22	t 8.15			11.30	L 12.05Am	L 7.40Am	L 3.40Pm		į
U. P. R. R. Crossing	3.91	X		7.15	8.05			11.20					
1.17 SPOKANE	2.74	RKDNP BXVZ	A 6.10Am	L 7.10 A 6.30	L 8.00An	A 5.30Pm	A 10.25Pm	L 1.15 A 0.45					
FORT WRIGHT	0.00	IDNPYXV RX	L 6.01 Am			Lt 5.23Pm							
Time Over Subdivision			.09	3.45	3.30	.07 23.49		4.02	4.30 29.91	4.50 27.84	5.25 24.85		

Westward trains are superior to eastward trains of the same class.

CONDITIONAL STOPS

- No. 4 Newport to discharge revenue passengers from Portland and Everett or west and to receive revenue passengers for Great Falls and points east where No. 4 scheduled to stop.
- No. 4 Priest River to pick up revenue passengers for Fargo and east where No. 4 scheduled to stop. No. 28 on Flag at Samuels postoffice, 2 miles east Colburn.

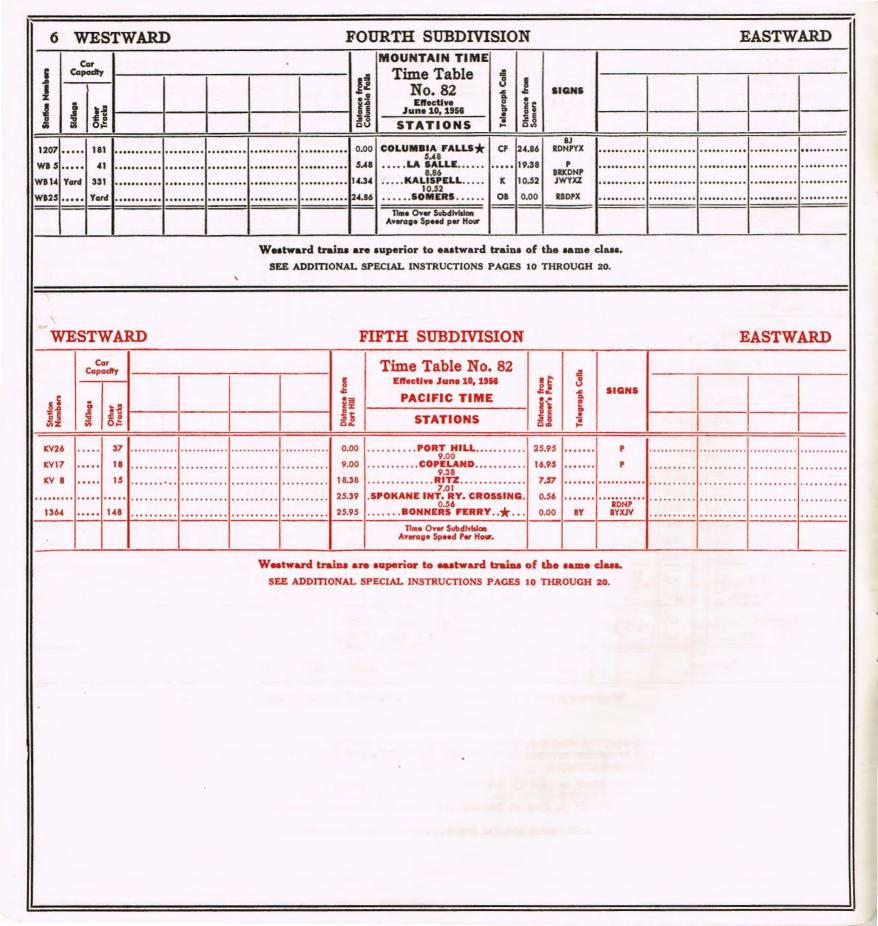

SO	UTH	IWA	ARD				S	SIXTH SUBDIVISION					NORT	HWAR	D 7
	Cap	ar acity				CLASS	Ę	Time Table No. 82 Effective June 19, 1956	Calls	E			CLASS		1
Statice Numbers	Sidings	Other Tracks			703	701	Distance from Nelson	PACIFIC TIME	Telegraph C	Distance from Dean	SIGNS	702	704		
śż	ŭ	ōĔ			Tue., Thur. and Sat.	Dally Ex. Monday	āz	STATIONS	1	20		Dally Ex. Sunday	Mon., Wed. and Friday		
SA 186		•••••			L 6.00Am		0.00	NELSON	BC	185.80	RDNWP		A 3.20Pm		
		1	RAINS	BETWEE	N TROU	IP JCT.	AND	ELSON BE GOVERNED BY	C. F	. RY.	TIME T	ABLE A	ND RULI	S	
SA 181	0	0			L 6.30Am		5,48	TROUP JUNCTION		180.32	RYPV		A 2.45Pm		
SA 176	0	27			6.55		10.30	4.82 SOUTH NELSON 6.82	•••••	175.50	•••••		2.10		
SA 169	0	8		•••••	7.25		17.12		• • • • •	168.68	•••••		1.40		
SA 166	0	15		• • • • • • • • • • • •	7.40		20.41	HALL 7.14 YMIR	•••••	165.39	•••••		1.25	•••••	
SA 159	0	16			8.05		27.55			158.25	•••••		12.57		
SA 155 SA 152	0 0	9 53			8.20 9.00		31.90 35.19	4.35 BOULDER MILL. 3.29 SALMO.	 Si	153.90 150.61	b		12.40 12.30		
SA 148	0	15			9.10		37.92	2.73 ERIE		147.88			12.05Pm		
SA 145	0	20			9.25		40.79	2.87 MEADOWS		145.01			11.55		
SA 140	0	7			9.55		45,71	4.92 PARKS		140.09			11.35		
SA 136	0	33			10.45		50.47	4.76 FRUITVALE 5.31		135.33	•••••		11.10	•••••	
SA 130	0	11	• • • • • • • • • • • •	•••••	11.15	•••••	55.78	COLUMBIA GARDENS	•••••	130.02	•••••	• • • • • • • • • • • •	10.45	•••••	
SA 127 SA 126	0	28 39	• • • • • • • • • • •	• • • • • • • • • • •	11.40 11.50	• • • • • • • • • • •	59.62 61.73	WANETA, B. C 2.11 BOUNDARY. U. S	•••••	126.18		•••••	10.20	•••••	
SA 116	60	89			12.40Pm		70.54	8.81 NORTHPORT	NP	124.07 115.26	PDYX	•••••	10.05 9.30	• • • • • • • • • • • •	• • • • • • • •
								8.27			FUIA		9.50		
SA 109	0	30			1.10	••••••	78.81		•••••	106.99	•••••	•••••	8.25		
SA 107	45	0		•••••	1.20	• • • • • • • • • • • •	80.04	DOLOMITE	•••••	105.76		•••••	8.20	•••••	•••••
SA 96	0	16		• • • • • • • • • • • •	1.55	•••••	90.28	BOSSBURG	•••••	95.52	• • • • • • • • • • • • • • • • • • • •	•••••	7.50	•••••	•••••
SA 93 SA 82	39 Yard	83 346		•••••	2.10 A 2.50Pm	L 4.40Am	93.66 104.06	EVANS 10.40 KETTLE FALLS		92.14	XP RKDN		7.35	•••••	• • • • • • • •
5A 02	Tara	340			A 2.30Pm	L 4.40Am	104.00		MF	81,74	BYXOJPZ	A 2.30pm	L 7.00Am		•••••
SA 77	0	13				5.10	109.37	5.31 PALMERS 3,17	•••••	76.43		2.00			
SA 73	0	115				6.00	112.54	COLVÍLLE	VD	73.26	PD	1.35			
SA 67	40	3				6.40	119.23	ARDEN	•••••	66.57	•	12.45			
SA 59	0	20				7.15	126.42	ADDY		59.38	•••••	12.15Pm			X
SA .50	81	135				9.00	135.49	9.07 CHEWELAH	СН	50.31	PDXZ	11.30			
SA 43	80	49				⁷⁰² 10.30	143.20		VY	42.60	PDYX	11.30 701 10.30			
SA 38	0	30				11.00	148.46	5.26 GRAYS		37.34		9.30			
SA 34	0	18					151.87	3.41 CLINE 1.25	•••••	33.93					
SA 33	39	17				11.30	153.12	SPRINGDALE	•••••	32.68	P	9.05			
SA 25	40	5				11.59	161.25	8.13		24.55		8.30			
SA 18	0	62				12.30Pm	168.04	6.79 CLAYTON		17.76	•	8.00			
SA 13	50	49				1.00	173.22	5.28 DEER PARK 3.60	DE	12.48	PDX	7.30			
SA 9	0	20					176.92	DENISON	•••••	8.88	P	6.25			
SA 4	40	0				1.40	182.14	WAYSIDE	•••••	3.66	P	6.10			
1460	Yard	72				A 2.10pm	185.80	3.66 DEAN	SF	0.00	JRDNX	l 6.00Am			
				-	8.50 11.78	9.30 8.60		Time Over Subdivision Average Speed Per Hour				8.30 9.62	8.20 12.49		

.

Southward trains are superior to northward trains of the same class. SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 10 THROUGH 20.

	Car Capacity THIRD CLASS						1	SEVENTH SUBDIVIS	1	1				ASTW	
					THIRD	CLASS		Time Table No. 82	Calls			THIRD	CLASS		
	-		80.5		-	393	Distance from Kettle Fails	Effective June 10, 1956 PACIFIC TIME	Telegraph Co	ce from olic	SIGNS	394		-	
Station Numbers	Sidings	Other Tracks	1			Mon., Wed., and Fri.	olstan Cettle	STATIONS	ele	Distance Republic		Mon., Wed., and Fri.			
02	0					and FrL			1 -		ORKDNB	and Fri.			
SA 82	Yard	346				L 5.00Am	0.00	KETTLE FALLS 4.70	MF	80.72	JYXPZ	A 4.10Pm			
SD 5	0	137				5.20	4.70	WEST KETTLE FALLS 7.39		76.02	P	3.45	•••••		
SD 12	0	24				5.45	12.09	BOYDS 5.39		68.63	•••••	3.15	• • • • • • • • • • • •		•••••
SD 17	0	31				6.05	17,48	BARSTOW 5.23		63.24	•••••	2.55	•••••		
SD 22	0	31				6.30	22.71	DULWICH 1.43		58.01	P	2.40	•••••		
SD 24	0	7				6.40	24.1,4	ORIENT		56.58		2,30			
D 29	0	12				7.00	28.59	4.45 GOLDSTAKE		52.13		2.10			
SD 35	0	18				7.30	34.67	LAURIER, WASH		46.05		1.50			
SD 46	0	5				8.15	46.01	GRAND FORKS, B. C		34.71		1.10			
D 47	0	4				8.20	47.47	GRAND FORKS JCT		33.25	YY	1.01			
SD 49	0	18				8.30	49.12	DANVILLE, WASH		31.60		12.55			
SD 53	0	11				8.45	53.22	4.10 HURLBURT		27.50		12.35			
								6.30				10.15			
SD 59	0	62				9.05	59.52	CURLEW		21.20		12.15Pm	•••••		
SD 65	0	33	• • • • • • • • • • • •	• • • • • • • • • • • •		9.20	65,59			15.13	•••••	11.55		• • • • • • • • • • • •	• • • • • •
D 72	0	18	• • • • • • • • • • • •		•••••	9.40	72.13	POLLARD		8.59	•••••	11.35	•••••	• • • • • • • • • • • • •	
	0	25				9.50	75.81			4.91		11.20			
								4.91	I		Version	- 11 00.			
	Yard	125				A 10.10Am	80.72	REPUBLIC	Z	0.00	XBRKDY	L 11.00Am			
					West	A 10.10Am 5.10 15.62	ins are	A:91 REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10	f the	same	class.	L 1.00Am 5.10 15.62			
5D 81	Yard	125	D		West	A 10.10Am 5.10 15.62	ins are	Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10	f the	same	class.	5.10	W	/ESTW	ARD
SD 81	Yard	125 AR	D	TH	West	A 10.10Am 5.10 15.62	ins are	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION	f the	same o	class.	5.10	W	ESTW CLASS	ARD
SD 76 SD 81	Yard	125 AR	D	THI	West	A 10.10Am 5.10 15.62	ins are ONAL SP EI(REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION	f the	same o cough	class.	5.10			ARD
5D 81	Yard STW Capa	125 AR	D	TH	West	A 10.10Am 5.10 15.62	ins are NAL SE EI(96	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION	f the	same o cough	class.	5.10 15,62 95			ARD
EAS	Yard STW Capa	125 AR	D	THI	West	A 10.10Am 5.10 15.62	ins are ONAL SP EI(REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION	f the	same o cough	class. 20.	5.10			ARD
EAS	Yard STW Capa	125 AR	D	THI	West	A 10.10Am 5.10 15.62	ins are NAL SE EI 96 Dolly	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION	f the	same o	class. 20. SIGNS	5.10 15,62 95 Dally			ARD
EAS EAS	Yard STW Capa Sbupps	125	D	TH	West	A 10.10Am 5.10 15.62 tward tra E ADDITIO	ins are DNAL SP EI(96 Dolly Except	COEUR d'ALENE.	f the	same elephone and could	zlass. 20. SIGNS	5.10 15,62 95 Daily Except			ARD
EAS uoitos c 32	Yard STW Capa souppis	AR	D	TH	West	A 10.10Am 5.10 15.62 tward tra E ADDITIO	ins are DNAL SP EI(96 Dolly Except Sun.	Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS	f the 0 THR tow Spokane	Talegroph Talegroph Canid Calify Cali	zlass. 20. SIGNS XRKDY PVZ	5.10 15,62 95 Dally Except Sun.			ARD
EAS uoitos c 32	Yard STW Capa Stupp Yard	125 AR city City Yard 57			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO SS	EIC 96 Dally Except Sun. L 3.00 A 3.10	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS m	f the o THR suppod supo	same cough s	class. 20. SIGNS XRKDY PVZ VZ	5.10 15,62 95 Daily Except Sun. A 10.50Am L 10.30Am	THIRD		ARD
EAS without and sc 32 sc 31	Yard Capa STW Capa Stard O	125 AR ctty trand 57 BETT			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO SS	EIC 96 Dally Exem. L 3.00 A 3.10 OF 11.94	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS m	f the o THR sydd sydd sydd sydd sydd sydd sydd syd	Same COUGH	zlass. 20. SIGNS XRKDY PVZ VZ VZ L INSTRUCT	5.10 15,62 95 Daily Except Sum. L 10.30Am L 10.30Am	THIRD		ARD
EAS 50 81 50 810 50 81 50 81 50 81 50 81 50 81 50 81 50 81 50 81 50 81 50 81 50 50 81 50 50 50 50 50 50 50 50 50 50 50 50 50	Yard Capa Capa STW Ca Capa Stard 0 18	125 AR city O D Yard 57 BETTO 0			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO SS	EI0 96 Dally Except 2 3.000 A 3.100 C OF 11.94 L 4.100	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS MILES, C. M. ST. P. & P. BY. TIME TABI MILES, C. M. ST. P. & P. BY. TIME TABI	f the 0 THR source 31.97 30.52 LE AND 18.29	same cough s	class. 20. SIGNS XRKDY PVZ VZ	5.10 15,62 95 Daily Except Son L 10.50Am L 10.30Am Construction Daily Except Son L 10.30Am L 10.30Am	THIRD		ARD
EAS 50 81 EAS 50 81 50 810	Yard Capa sbuypy Yard 0 18 0	AR Cetty Cetty Cetty Yard 57 BETT 0 12			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO SS	EIO 96 Dally Except Sun. L 3.00[A 3.10] C 0F 11.94 L 4.10] 4.35	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o DECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS MILES, C. M. ST. P. & P. RY. TIME TABI MILES, C. M. ST. P. & P. RY. TIME TABI SPOKANE BRIDGE S25 Octobel	f the 0 THR 9990 9950 9950 9950 9950 9950 9950 995	Same COUGH	class. 20. SIGNS XRKDY PVZ VZ L INSTRUCT V	5.10 15,62 95 Daily Except Son. A 10.50Am L 10.30Am 10NS WILL (A 9.30Am 9.10	THIRD		ARD
EAS 50 50 50 50 50 50 50 50 50 50	Yard Capa STW Ca Capa Suppy S Yard 0 18 0 0	125 AR ctty Yard 57 BETT 0 12 7			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO	EIC 96 Dally Except Sun. L 3.00 A 3.10 L 4.10 4.35 4.40	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS MILES, C. M. ST. P. & P. RY. TIME TABLE MILES, C. M. ST. P. & P. RY. TIME TABLE SPOKANE BRIDGE. 0.66	f the 0 THR 800 800 800 800 800 800 800 800 800 80	Same CoUGH	class. 20. SIGNS XRKDY PVZ VZ LINSTRUCT V X	5.10 15,62 95 Daily Except Sun. A 10.50Am L 10.30Am L 10.30Am 9.10 9.10 9.00	THIRD		ARD
EAS steegen by c 32 c 31 c 19 c 13-B c 13 c 7	Yard Capa STW Ca Capa Stuppis Yard 0 18 0 0	125 AR City Yard 57 BETT 0 12 7 7			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO	EIC 96 Dolly Except Sun. L 3.00 A 3.10 C F 11.94 L 4.10 J 4.35 4.40 5.00	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS MILES, C. M. ST. P. & P. RY. TIME TABI MILES, C. M. ST. P. & P. RY. TIME TABI SPOKANE BRIDGE.	f the 0 THR 0 THR 1990 130.52 18.29 13.04 12.38 6.98	Same COUGH	class. 20. SIGNS XRKDY PVZ VZ L INSTRUCT V	5.10 15,62 95 Daily Except Sun. A 10.50Am L 10.30Am L 10.30Am 9.10 9.10 9.00 8.25	THIRD		ARD
EAS 50 81 EAS 50 20 50 31 50 19 51 13-B 50 13 50 7 50 6	Yard Capa STW Car Capa Stuppis Yard 0 18 0 0 27	125 AR ctty Yard 57 BETT 0 12 7			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO	EIC 96 Dolly Except Sun. L 3.00 A 3.10 L 4.10 4.35 4.40 5.00 5.05	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS MILES, C. M. ST. P. & P. RY. TIME TABI SPOKANE BRIDGE.	f the 0 THR 0 THR 100 31.97 30.52 LE AND 18.29 13.04 12.38 6.98 5.82	Same CoUGH	class. 20. SIGNS XRKDY PVZ VZ LINSTRUCT V X	5.10 15,62 95 Daily Except Sun. A 10.50Am L 10.30Am L 10.30Am 9.10 9.10 9.00 8.25 8.20	THIRD		ARD
EAS 50 81 EAS 50 20 50 20 50 50 20 50 20 50 50 20 50 20 50 20 50 20 50 50 50 50 50 50 50 50 50 5	Yard Capa Buy Yard 0 18 0 0 27 0	125 AR city Yard 57 BET 0 12 7 7 0 4			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO SS	EIC 96 Dolly Except Sun. L 3.00 A 3.10 C F 11.94 L 4.10 J 4.35 4.40 5.00	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o PECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS MILES, C. M. ST. P. & P. RY. TIME TABI MILES, C. M. ST. P. & P. RY. TIME TABI SPOKANE BRIDGE. 5.40 MILLEWOOD 1.16 ORCHARD AVE. 1.42 SAG	f the 0 THR 0 THR 31.97 30.52 LE AND 18.29 13.04 12.38 6.98 5.82 4.40	Same Cough	zlass. 20. SIGNS XRKDY PVZ VZ L INSTRUCT V X X X	5.10 15,62 95 Daily Except Sun. A 10.50Am L 10.30Am L 10.30Am 9.10 9.10 9.00 8.25	THIRD		ARD
EAS 50 81 EAS 50 32 50 32 50 32 50 32 50 31 50 19 51 3-8 50 13 50 7 50 6 50 5 50 2	Yard Capa STW Capa Sby System Yard 0 18 0 0 0 27 0 0 0	125 AR city Yard 57 BET 0 12 7 7 0 4 117			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO SS	EIC 96 Dally Exemp C 3.000 A 3.100 A 3.100 C OF 11.94 L 4.100 4.35 4.40 5.000 5.05 5.15	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o DECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS MILES, C. M. ST. P. & P. RY. TIME TABION MILES, C. M. ST. P. & P. RY. TIME TABION MILES, C. M. ST. P. & P. RY. TIME TABIONE MILLEWOOD 12.23 MILLEWOOD 1.16 ORCHARD AVE. 1.42 PARKWATER 3.60 N. P. CROSSING.	f the 0 THR 31.97 30.52 LE AND 18.29 13.04 12.38 6.98 5.82 4.40 1.86	Same Cough	zlass. 20. SIGNS XRKDY PVZ VZ L INSTRUCT V X X X X X VM DNKORY	5.10 15,62 95 Daily Except Son. L 10.30Am L 10.30Am 9.10 9.00 8.25 8.20 8.15	THIRD		ARD
EAS	Yard Capa STW Capa Sby System Yard 0 18 0 0 0 27 0 0 0	125 AR city Yard 57 BET 0 12 7 7 0 4			West SE	A 10.10Am 5.10 15.62 tward tra E ADDITIO SS	EIC 96 Dolly Except Sun. L 3.00 A 3.10 L 4.10 4.35 4.40 5.00 5.05	REPUBLIC. Time Over Subdivision Average Speed Per Hour superior to eastward trains o DECIAL INSTRUCTIONS PAGES 10 GHTH SUBDIVISION Time Table No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS MILES, C. M. ST. P. & P. RY. TIME TABION MILES, C. M. ST. P. & P. RY. TIME TABION MILES, C. M. ST. P. & P. RY. TIME TABIONE MILLEWOOD 12.23 MILLEWOOD 1.16 ORCHARD AVE. 1.42 PARKWATER 3.60 N. P. CROSSING.	f the 0 THR 0 THR 31.97 30.52 LE AND 18.29 13.04 12.38 6.98 5.82 4.40	Same Cough	zlass. 20. SIGNS XRKDY PVZ VZ L INSTRUCT V X X X X X VM DNKORY	5.10 15,62 95 Daily Except Sun. A 10.50Am L 10.30Am L 10.30Am 9.10 9.10 9.00 8.25 8.20	THIRD		ARD

WE	ST	VAI	RD				NINTH SUBDIVISION					EAS	TWAR	D 9
Station Numbers	Sidings	Other April 1					Time Time No. 82 Effective June 10, 1956 PACIFIC TIME STATIONS	Distance from Spokane	Telegraph Calls	SIGNS				
SB 90	Yard	90						96.05	MO	BRKDYXV				
SB 82 SB 76	0 13	12 105	· · · · · · · · · · · · · · · · · · ·					88.17 81.57	PA	DYXV				
58 71 98 69	0	10 11					4,92 GRINNELL 1.93 	76.65	•••••					
	·····						N. P. & U. P. R. R. CROSSINGS 0.36	71.00		M				
58 65 58 61	16 0	22					GARFIELD. 4,05 CRABTREE.	70.64	GF	D				
SB 57	0	18					3.49 	63.10 59.50						
							U. P. R. R. CROSSING 0.62	59.46		M				
58 53 58 50	 0	47					OAKESDALE	58.84	KA	DV			·····	
SB 45	0	23					4.66 FAIRBANKS	50.96						
SB 40 SB 34	28 8	59 21						45.71 39.73	WA	D				
SB 30	0	0					2.94 	36.79 34.19						
		B	ETWEEN U. I	P. R. R. JCT.	AND N. P. CR	IOSSING, A D	DISTANCE OF 32.33 MILES, U. P. R. R. TIME TABLE			NSTRUCTIO	NS WILL GO	VERN.		
SC 2	0	117			OPER	ATION BET	1.86 WEEN N. P. CROSSING AND SPOKANE IS OVER E	1.86	SUBDIVI	SION.				
58 O	Yard	Yard						0.00	DS	DNKORYX ZVB				
							Time Over Subdivision Average Speed Per Hour							
	ST	WAJ	RD				ains are superior to eastward trains IONAL SPECIAL INSTRUCTIONS PAGES TENTH SUBDIVISION	10 TH					EASTW	ARD
	Cap	ar acity					Time Table No. 82							1
Station Numbers	Sidings	Other Tracks					Effective June 10, 1956 PACIFIC TIME	Distance from Spring Valley	Telegraph Calls	SIGNS				
52 W77	Yard	0⊧ 49					COLFAX	36.74	<u>-</u>	YXRKD				
							0.28 U. P. R. R. CROSSING 11.89	36.46		M				·····
W65 W60	30	25						24.57 19.57						•••••
W55	0	28	-				4.21 THORNTON	15.36						••••••
								14.72		M				
W46 58 40	10 28	29 59					8,95 Rosalia. 5.77 SPRING VALLEY.	5.77 0.00	RO	DV JXRYO				
							Time Over Subdivision Average Speed Per Hour							
		1					ains are superior to eastward trains ONAL SPECIAL INSTRUCTIONS PAGES						-	1

ALL SUBDIVISIONS

1. SPEED RESTRICTIONS GENERAL.

(a) Where Automatic Block and Interlocking Rules and Signal Indications require movements at RESTRICTED SPEED, such movements must be made prepared to stop short of train, obstruction, or switch not properly lined and on the lookout for broken rail or anything that may require the speed of a train to be reduced, but not exceeding 15 MPH or as much slower as necessary and where conditions require the movement must be controlled so stop can be made in time to avoid accident.

(b) Maximum permissible speed of passenger, freight and mixed trains will be designated by distinctive reflectorized roadway signs set in an upward angle of 45 degrees. Except as directly affected by speed restrictions prescribed in Item 1—ALL SUB-DIVISIONS—and other speed restrictions covered by Item 2 under individual Subdivisions, the 45 degree signs designate zone speed territories and the numerals thereon indicate in miles per hour the maximum permissible speed which will govern until the next zone sign is reached.

When the movement is from a higher to a lower speed zone, the zone sign is located approximately one mile from the point where the lower speed becomes effective. At the end of this one mile is located a reflectorized angular Restricting Sign, yellow background with black stripes, indicating the point where lower speed becomes effective. Lower speed to govern until entire train passes next zone sign.

When the movement is from a lower to a higher speed zone, the 45 degree sign is located at the point where speed may be increased.

In double track territory, when trains or engines are operated against the current of traffic or when one of the tracks is used as single track; in either case the track being used is not signaled for traffic in the direction of the movement, the maximum permissible speed is.---

Passenger	 MPH
Freight	 MPH

This does not modify Rule 93; Further, trains and engines operating under the above conditions must not exceed the maximum permissible speed prescribed by the 45 degree signs with the current of traffic.

The 45 degree sign has two sets of figures. The numerals preceded with letter "P" apply to passenger trains and letter "F" to freight and Mixed trains.

(c) When passenger trains are handled by Diesel or Electric engines, the train will not exceed the maximum speed authorized by Speed Limit Plate on engine, and will be governed by the 45 degree signs where a lower speed is prescribed.

When freight cars, except cars equipped with steel wheels, air signal and steam heat lines, are handled in passenger trains, the train will not exceed maximum permissible speed for freight trains in the territory operated.

(d) Speed shown on Speed Limit Plate on engines must not be exceeded.

(e) Diesel and Electric engines light or with caboose

When handling cabooses X-100, X-198 to X-310 cabooses X-330 to X-749	
Trains handling non-revenue Great Northern cars that	
are equipped with "K" type air brake valves are to be operated in trains not exceeding 50 cars and at	
speeds not exceeding	40 MPH
Trains handling, not in actual service, derricks, pile drivers, ditchers, cranes, shovels, Jordan Spread-	
ers, wedge plows, etc.	
On Main Lines	30 MPH
Except on six degree curves or sharper and on Branch Lines	15 MPH
Trains handling ore cars or air dump cars loaded with	
ore or gravel and scale test car on Main Line except on 6 degree curves or sharper, and on Branch	80 MPH
Lines	20 MPH
Unless conditions require a further speed restriction,	
trains or engines moving against the current of traffic on double track through interlockings	15 MDH
on double made on one model modelings	TOWLU

Trains or engines moving on main routes actuating Cut Bank, end of double track, east and west end of Bridge 1090.8. Blackfoot, end of double track. Summit, end of double track. Red Eagle, end of double track. Conkelley, end of double track. Whitefish, end of double track. east siding switch. Vista, Fortine, east switch to freight track. Stonehill, east and west siding switch. Ural, east and west siding switch. Volcour, east and west siding switch. Kootenai Falls, east and west siding switch. Troy, Yakt, Leonia, Naples, Colburn, east and west siding switches. Newport, west siding switch. Dean, end of double track. Fort Wright, SP&S Junction.

These commodities must not be placed in trains at such locations as will conflict with the rules governing the handling of explosives, inflammables or acids.

In double track territory, engineers on trains containing such cars must at all times use extreme care to avoid slack action running in or out when passing or being passed by other trains. On single track, trains containing such cars must be at stop when on siding or adjacent track when meeting or being passed by other trains, except when there are more cars than siding will hold, it is permissible for such trains to pull by other train at restricted speed.

2. MOVEMENT OF ENGINES DEAD IN TRAINS.

Diesel and Gas-Electric engines 2303-2350 must be handled on rear of train.

Not less than five cars will be placed between steam engines moving dead in train.

Switcher and road switcher type Diesel engines G. N. Nos. 1 through 232, and 600 through 711, moving dead in freight trains are to be handled near rear of train and behind helper engines. Where more than one unit is moved, such units must be separated by a freight car.

When towing multiple unit road type Diesel engines dead in freight trains, not more than four adjacent units are to be towed in a single grouping, separated from the road engine and additional groups by not less than five cars.

Trains handling steam engines with side rods on both sides will not exceed speed designated by Superintendent; and without side rods will not exceed 10 M.P.H.

Engines that have any of the truck or driving wheels removed will not be moved in a train without authority of Superintendent. Trains handling Electric, Diesel and Gas-Electric engines in tow dead in train will not exceed following speeds:

10

No14 .

Engine Number	Maximum Speed
1 to 28, 75 to 170	50 MPH
175 to 232, 247 to 249, 253 to 259, 262, 263,	
271 to 274, 276 to 279, 307 to 317, 400 to 474,	
550 to 583, 600 to 678, 681 to 711	65 MPH
250, 251, 260, 261, 266 to 270, 275, 280, 281,	
350 to 365, 500 to 512, 679, 680	75 MPH
2302 to 2324	50 MPH
2325 to 2350	60 MPH
5000 to 5008	45 MPH
5010 to 5019	55 MPH

3. Under Rule 24, engine number only will be displayed in indicators on engines so equipped. This will also apply when our engines are operating over Northern Pacific tracks. Between Klamath Falls and Chemult, Southern Pacific Rules will govern.

4. When two or more Diesel or Electric engine units are coupled together the numerals and suffix letter, where provided, of the leading unit will be illuminated at all times when in service. The numerals and suffix letter of trailing units must not be illuminated.

The numerals and suffix letter of the leading unit only will be used in train orders as prescribed by Consolidated Code Rule 206.

- 5. Gas-Electric engines must not be fueled while occupied by passengers, or coupled to cars occupied by passengers.
- 6. Air hose on Diesel and Electric engines must be hooked up in hose fastener when not in use.
- 7. EMPLOYEES WILL BE GOVERNED AS FOLLOWS ON EN-GINES, PASSENGER AND FREIGHT CARS EQUIPPED WITH ROLLER BEARINGS.

Roller bearing failures on cars or engines equipped with roller bearing journal boxes may be due to lack of oil or grease. If the box is not blazing, the oil plug in the cover should be removed and engine or valve oil added. Oil must never be added to a box that is blazing. Grease lubricated roller bearing boxes have grease plugs locked with metal strap which must be cut off with chisel before plug can be removed. After the oil has been added and plug replaced, the train should proceed at reduced speed and care exercised until it is apparent that the box will run cool. If fire develops in roller bearing box on any equipment, it must be closely watched, train moved slowly, and Superintendent notified from first available point of communication, who will prescribe for the movement.

Some engines and cars equipped with roller bearings have heat indicators or stench bombs inserted in the housing of boxes which release a strong pungent odor in the event of excessive journal box temperatures. When this odor is detected, train must be stopped at once and box located. Compare the temperature of this box with the other boxes on the same engine or car, check the oil level, and if there is no evidence of overheating, train may proceed, but if the box is overheating proceed only as instructed in the preceding paragraph.

Cars and engines equipped with roller bearings must not be allowed to stand alone, even on level track, without brakes being adequately applied.

8. COOLING AND STEAM BOILER WATERING FACILITIES FOR DIESEL ENGINES ARE PROVIDED AT THE FOLLOW-ING INTERMEDIATE STATIONS:

FIRST SUBDIVISION:

CUT BANK:	Cooling water only, at Depot.
GLACIER PARK:	Cooling water at Depot.
	Boiler water at standpipe.
ESSEX:	Both in depot warehouse.
BELTON:	Cooling water only, at Depot.
	Cooling water only, at Depot.

SECOND SUBDIVISION:

STRYKER:	Cooling water only, at Depot.
FORTINE:	Cooling water only, at Depot.
EUREKA:	Cooling water only, at Depot.
	Both at emergency standpipe, connec-
	tions and hoses in frost box.
LIBBY:	Both at emergency standpipe east of
	Depot, hoses in Depot.
TROY:	

THIRD SUBDIVISION:

BONNERS FERRY:	Both at Water tank, hoses in Depot.	
NAPLES:	Cooling water only, at Depot.	
SANDPOINT:	Both at East end of Depot, hoses in fro	ost
	box.	

NEWPORT:Cooling water only, at Depot.

SIXTH SUBDIVISION:

NORTHPORT:Radiator only

SEVENTH SUBDIVISION:

REPUBLIC:Radiator only

EIGHTH SUBDIVISION:

COEUR D'ALENE:Radiator only

NINTH SUBDIVISION:

MOSCOW:	Radiator	only
GARFIELD	• • • • • • • • • • • • • • • • • • • •	** -

TENTH SUBDIVISION:

COLFAX:	Radiator	only	
ROSALIA:	44	•• -	

- 9. Under Rule 2, watches that have been examined and certified to by a designated inspector must be used by train dispatchers and yardmen.
- 10. Brakemen with less than one year of experience should not be used as flagmen except in emergency, and then Superintendent will be notified by wire.
- 11. When operating snow machines in non-block signal territory, no train should be permitted to follow closer than a station apart, when that cannot be done, they will be blocked not less than thirty minutes apart.
- 12. After severe blizzard or dirt storm, employes on first train over road must exercise care to avoid accident caused by striking drift without first having drifts faced with hand shovels, cutting in far enough to get beyond the hard snow and giving a perpendicular wall to strike against instead of slope or wedgelike shape. When operating snow dozer, conductor in charge will ride in dozer. On snow and dirt dozers every precaution must be taken to see that cage, flangers and wings clear all obstacles when in service and are properly secured when in through trains, and dozers properly turned. Hand screws must be tightened to raise flangers on dozers as high as possible before making a back-up movement, and must not be released until the dozing work is actually to start. Hand screws holding the cage on dozers must be tightened or chains otherwise fastened except when dozer has air in cylinders and is attended by an employe.
- 13. Loaded dump cars should not be handled on double track after dark, but if necessary to do so, close watch must be kept by trainmen and if a car dumps its load, train must be stopped and protection afforded on the opposite track.
- 14. Unless otherwise provided, when passenger trains are operated against current of traffic on double track or through sidings, Conductors shall notify Railway Postal Clerks; trains shall stop at points where U. S. mail is usually picked up and Conductors are responsible for delivery of mail to Postal car.
- 15. Conductors will report by wire all flat spots on wheels of passenger cars. Any cars having flat spots on wheels of more than two and one-half inches long must be set out.

12

4.50

- 16. Engineers finding flat spots on diesel engines in excess of two and one-half inches will immediately notify Superintendent who will prescribe for their movement.
- 17. Due to limited overhead clearance at tunnels and structures, employes are warned to keep off top of cars of extreme height and width when handled in trains and yards, also such standing cars in electrified zone, except in emergency. In absence of previous advice on such cars, wire proper officer for instructions.
- 18. The Railway Company is responsible for proper handling of perishable freight on road and at points where Western Fruit Express Company does not maintain representatives. Conductors on trains handling perishable freight will ascertain from waybills class of service required and light or extinguish heaters and manipulate vents in accordance with current instructions provided for handling perishable freight issued by the National Perishable Freight Committee.
- 19. Placarded loaded tank cars handled in through freight trains shall not be nearer than 6th car from engine, occupied caboose or passenger car.

Cars placarded "Explosives", "Inflammable", "Corrosive Liquids", or "Poison Gas" handled in through freight trains, local and mixed trains, shall not be nearer than 16th car from engine, occupied caboose or passenger car.

When length of train will not permit handling of cars as prescribed above—ANY PLACARDED CAR, loaded with above commodities—shall be placed near middle of train, but not nearer than 2nd car from engine, occupied caboose or passenger car.

When switching such cars in terminal yards they must be separated from engine by at least one non-placarded car.

When placarded cars described above are handled in freight trains made up in "blocks" or classifications, placarded car or cars shall be placed near middle of the "block" or classification, but not nearer than 6th car from engine, occupied caboose or passenger car.

When such placarded cars are placed in trains they must not be placed next to each other, next to refrigerators equipped with gas-burning heaters, stoves or lanterns, or next to loaded flat cars, or gondola cars containing lading higher than ends of car that is liable to shift.

Carload express shipments of explosives, sealed and placarded may be handled on passenger trains; LCL shipments may be made in so-called peddler car with messenger in charge when such car is assigned to the handling of express and baggage exclusively.

Terminal or pick-up points enroute must furnish conductor and engineer Form 250 showing consecutively location in train of all cars placarded "Explosives". At points other than terminals where crews change, notice will be transferred from crew to crew.

Employes will be guided by further instructions governing handling of loaded tank cars, Explosives, Inflammables, Corrosive Liquids, and Poison Gas found in I. C. C. Regulations and Consolidated Code Rules 726(C) and 808.

- 20. In automatic Block Signal Territory, the absence of the lunar light on a spring switch signal, Rule 501 E, page 114, of the Consolidated Code, will not be regarded as an imperfectly displayed signal, as prescribed by Rule 27, when the Automatic Block Signal governing movement over such switch indicates "Proceed". This does not modify Rule D-524.
- 21. The normal position of a spring switch with facing point lock is identified by a color light type signal displaying a "lunar white" light for train or engine movements in a trailing point direction and for movements in facing point direction when conditions require.

The normal position of a spring switch without facing point lock is identified by a triangular yellow target on switch stand with letter "S" in black and "lunar white" light in switch lamp in place of green light displayed in both directions through or over the switch.

Trains departing from stations, either from siding or main track, in trailing point movement actuating points of spring switches, a member of crew must observe indication of governing signal in opposite direction after rear end of train has passed through switch to ascertain if switch points return to normal position. If this signal indicates Stop and no immediate train movement or other cause is evident, report the fact to Superintendent from first available point of communication.

During and immediately following snowstorms or violent wind storms, spring switches must be operated by hand and relined to normal position before heading out through switch in trailing point movement, actuating switch points, to insure switch is in proper operating condition.

INDICATORS AT SPRING SWITCHES.

Spring switch indicators consisting of a red and yellow light unit or a single yellow light unit (all units normally dark) mounted on an iron mast is located at the clearance point of a siding. The switch-key-controller mounted on the mast must be operated by a member of the crew who, together with engineer, must observe and be governed by its indication before fouling main track or making movement from siding to main track through a spring switch in automatic signal territory, unless the movement is made immediately after an opposing train has passed the switch and Automatic Signal at leaving end of siding indicates "Proceed".

If indicator displays a yellow light when switch-key-controller is operated, train or engine movement to main track may be made immediately in accordance with train rights and operating rules. Display of yellow light must continue until leading wheels have passed clearance point.

If indicator does not display a yellow light when switch-keycontroller is operated, train or engine movements to main track may be made in accordance with train rights and operating rules, after operating spring switch by hand; waiting three minutes and taking every precaution to provide proper protection. To operate Switch Indicator, insert switch key in controller and turn clockwise toward "R", hold a few seconds and remove key. If yellow light is displayed and intended movement is not made, insert switch key in controller and turn counter clockwise toward "N" to restore signal system to normal condition to avoid delays to trains on main track.

Switch-key-controller must never be operated toward "N" after having been operated toward "R" if intended movement to main track is to be made.

- 22. Facing point locks on hand operated switches are indicated by a six-inch yellow stripe painted on target staff. Be positive locking device is restored to normal position after using. A running switch must not be made through this type switch.
- 23. DRAGGING EQUIPMENT DETECTOR INDICATOR consists of a single white light unit (normally dark) with circular background mounted on signal or other mast. When white light is displayed, train must be stopped and inspected for dragging equipment. Notify Superintendent from first available point of communication.
- 24. Rule 204 (A) prescribes that copies of train orders will be furnished the rear trainman, such orders will only be furnished on designated: Trains Nos. 31, 32, 3, 4, 7, 8, 9, 10, 27, 28 and sections thereof; also extra passenger train whether operated as section of regular train or as a passenger extra.
- 25. OSCILLATING EMERGENCY RED HEADLIGHT will be immediately displayed by day or night when a train is disabled or stopped suddenly by an emergency application of air brakes or when engineer and conductor find it necessary to stop train due to some defect which might cause accident, overrunning clearance point at meeting and waiting points, end of double track or junction.

Engineer of an approaching train observing display of emergency red headlight must stop before passing and be governed by conditions existing. If operating on adjacent track, ascertain and if safe for passage, then proceed at restricted speed until train is passed.

OSCILLATING EMERGENCY RED REAR END LIGHT is of two types—Automatic Control—Portable Manual Control—and except as otherwise provided, must be displayed by day or night each time train stops or is running at speed less than 18 MPH. Automatic Control type automatically functions in this manner. However, when train running at speed above 18 MPH and moving under circumstances in which it might be overtaken by another train or engine and during foggy and stormy weather, light may be operated manually with emergency switch and employes to afford other protection prescribed by rule.

THE USE OF EMERGENCY RED HEADLIGHT AND REAR END LIGHT DOES NOT IN ANY WAY RELIEVE ENGINE-MEN AND TRAINMEN FROM RESPONSIBILITY OF COM-PLYING WITH RULES 99 AND 102.

Emergency red rear end light must be extinguished: when standing at origin and terminus stations of train run; when switching being performed from rear; when on siding to be passed by another train; and, when another train operating on adjacent track is approaching from rear, but not until it is known such train is not on same track.

Portable light must be removed before coupling to rear of such car.

Oscillating white light on engines will be displayed in addition to standard headlight governed by Rules 17 and 17 (B). In case of headlight failure it can be used as emergency headlight or as a focus light by push button control if desired.

Enginemen and trainmen on trains and engines equipped with oscillating emergency red lights must familiarize themselves with the operation of the lights.

- Rule D-97 is in effect on this Division. 26.
- Trains handling flat or skeleton cars loaded with logs will not 27. exceed 10 MPH passing over through-truss bridges, or through tunnels. Thorough inspection of all cars of logs in train must be made at appropriate locations when train is stopped for meeting trains and other purposes, making certain train and lading are in safe condition before proceeding. Extra stops en route will be made for this purpose when in the judgment of the route will be made for this purpose when in the judgment of the conductor it is necessary. Trainmen must maintain watch behind their trains for logs that may have rolled off cars and if main track is fouled take prompt action to protect trains. On double track, conductors must notify train dispatcher when logs are to be handled and the log train must be at stop when

being passed by other trains, except that when two trains handling logs are passed, either one should stop until the other train has pulled by whether on siding or double track.

On single track, trains handling logs must be at stop when meeting or being passed by passenger and freight trains, except when there are more cars than siding will hold, it is permissible for log train to pull by such train at restricted speed. In double track territory, logs must be secured to cars by chains or cables.

Unless conditions require further speed restrictions, trains handling logs must not exceed 25 MPH.

- When necessary, for any reason, to set out a car containing mail at any point short of destination, take up with mail clerk in charge and ascertain whether or not there is any mail to be transferred before setting car out.
- When a derailment occurs, the car or cars involved must be set 29. out at first available point after rerailed, and held until car men sent to make inspection.
- Trainmen will see that caboose windows are securely fastened 30. and doors locked before leaving on arrival at terminals.
- Montana State law provides that it is unlawful to block a public 31. crossing for more than fifteen minutes; Idaho State law, ten minutes; and Washington State law, ten minutes.
- 32. When necessary to use a chain in handling a car with a bad order drawbar with a Diesel road engine, keep a car between the Diesel and the bad order car whenever possible to do so, in order to prevent bad order car damaging the Diesel.
- 33. Canadian Maintenance of Way flagging Rules 40 through 49 found on pages 216 through 220 in the Consolidated Code are in effect in Canada.

WHISTLE SIGNALS FOR INTERLOCKING ROUTES: 34. Westward main track ______2 long 1 short Eastward main track _____2 long 2 short

35. EMERGENCY TELEPHONES.

Between Blacktail and Nimrod:	
Tunnel No. 1 west end Curve No. 115 west end at Windy Point	Booth
Curve No. 115 west end at Windy Point	Booth
Tunnel No. 1½ east end Snowshed No. 740 ft. from east end on center post.	Booth
Snowshed No. 740 ft, from east end on center post.	Steel Box
Snowshed No. 840 ft. from east end on center post.	Steel Box
Snowshed No. 940 ft. from east end on center post.	Steel Box
Curve No. 129 east end	Booth
Curve No. 129 east end Snowshed No. 1040 ft. from west end on center post	Steel Box
Snowshed No. 10.740 ft. from west end on cent. post	Steel Box
Snowshed No. 1140 ft. from west end on center post	Stool Box
Showshed No. 1140 It. from west end on center post	"
Curve No. 140 east end Pinnacle, 1½ miles west of, 500 ft. west Tunnel No.	9 Deeth
Pinnacie, 1 ½ miles west or, 500 it. west lunnel No.	JBooth
Belton, 3½ miles east of, east end Tunnel No. 3.8	Booth
Columbia Falls, 4 miles east of, 500 ft. east Tunnel No	. 9Booth
Whitefish, 3 miles west of, west end Curve	
Whitefish, 3 miles west of, west end Curve 292Watchn Between Troy and Yakt10 poles west MP	ian's Cabin
Between Troy and Yakt	.341.
Between Yakt and Leonia East portal Tunnel I	No. 8.
Between Leonia and Katka13 poles east MP 135	3.
3 poles east MP 135	6.
3 poles east MP 135 Between Katka and CrossportWest portal Tunnel Curve 593, 2 miles	No. 10.
Curve 593, 2 miles	east Cross-
port.	
Between Scotia and Camden	Ňo. 11.
Spokane, when stopped by Stop-indication at auton	natic block
Spokane, when stopped by Stop-indication at autom signal 1475.3, telephone before blocking street crossi	ng—
Fort Wright, east end bridge 274	Booth
Wayside	Booth
Dennison	Booth
Clayton	Booth
Loon Lake	Booth
Springdale	Booth
Grays	Booth
Addy	Booth
Arden	
West Kettle Falls	Booth
Evans	Booth
Marble	Booth
Dulwich	Booth
Orient	
Danville-1 mi. westCus	Rooth Booth
Curlew Millwood Transfer track	Dooth
Millwood Transfer track	Dooth
Carders	
Flora Jct.	
Greenacres	Booth
Spokane Bridge Coeur d'Alene, MP 32	Booth
Coeur d'Alene, MP 32	Booth
Gibbs	Booth

FIRST SUBDIVISION

(Main Line)

9

1.	MAXIMUM PERMISSIBLE SPEED FOR TRAINS.	
	Between Passenger	Freight
	MP 1090, Cut Bank and MP 1219, Whitefish79 MPH	50 MPH
2.	SPEED RESTRICTIONS.	
	Cut Bank, Bridge 1090.8	30 MPH
	Nimrod, Bridge 1165.3, through gantlet	20 MPH
	In double track territory, trains against the current of traffic between:	
	Cut Bank and BlackfootPassenger Freight	
	Summit and NimrodPassenger	
	Freight	1
	Essex and Red EaglePassenger	
	Freight	
	Conkelley and WhitefishPassenger	
	Freight	40 MPH

3. TRAIN REGISTER EXCEPTIONS.

Cut Bank, first class trains and passenger extras register by ticket.

Register of regular trains at Cut Bank will cover their arrival at Blackfoot.

Register of regular trains at Whitefish will cover their arrival at Conkelley.

Outgoing crews of freight trains will make running inspection 4. at Cut Bank.

RESTRICTED CLEARANCES. Б.

Summit, westward freight trains will pull rear end of train clear of end of double track to avoid delay to eastward trains.

- Westward freight trains will stop engines just east of inspection 6. point sign located 400 feet east of fouling point east end of Nimrod gantlet.
- On arrival at Essex, eastward freight trains requiring helper 7. engine assistance will come to a stop and make full application of air brakes and leave applied until proceed signal received from helper engine. Helper engine will be coupled against rear of caboose and immediately make back up movement to ascertain positive coupling, after which train line air brake connections must be coupled and double heading cock closed and helper engine will sound signal, Rule 14(b), and train engine will release brakes. Prescribed air test must be made by train engine before starting, and speed of train departing must allow train crew to make full inspection and safely board rear cab of helper ×. 14 engine. When helping freight trains, helper engineers will set brake pipe feed valve to a pressure 5 pounds below that carried by the road engine. Engineers on freight helper engines will be held responsible in seeing that brake pipe hose is coupled and air cut in between helper engine and train. Engineers will position the controlled emergency feature, on engines having brake equipment with this feature, positioned on all units in the non-control or passenger position. All double heading cocks must be closed after engine is cut in on train, and brake valve handles placed in proper positions according to type of brake equipment.
- 8. On arrival at Summit, eastward freight trains with helper engine assistance behind caboose must come to a stop clear of the end of double track. After helper engine is cut off and prescribed air test and train inspection completed, if consistent with train rights, train may proceed. Under no circumstances whatsoever will anyone be allowed to ride in the caboose within the limits of helper territory while helper engine is shoving against the rear of train. Train crew must ride in rear cab of helper engine, using rear headlight for center of track inspection when necessary.
- Whenever outfit cars are handled on rear of freight trains, or 9. it is necessary to provide coaches ahead of the caboose for the convenience of stockmen, messengers, etc., or whenever stock-men, messengers, etc., are carried in the caboose, helper engines must be cut into train. With the exception of authorized train service employes on duty, no one will be permitted to ride in

either cab of helper engine at any time. 10. HANDLING OF AIR CONDITIONED EQUIPMENT AND DIESEL ENGINES IN TUNNELS. Should a passenger train, irrespective of the type of power being

used, be stopped in tunnel, air conditioned cars within the tunnel must immediately have the air conditioning system, including ice engine and engine generator, shut off, fresh air intake shutters closed, and blower fans shut off.

Power plants and steam generators on diesel engines and heater cars should be shut down. Should a diesel power train be stopped with the engine in a tunnel and it is found that, in the case of passenger trains it cannot be moved within a reasonable length of time, trainmen and enginemen must take necessary precautions to prevent movement. Independent brake and sufficient hand brakes must be immediately applied.

11.	CROSSOVERS ON DOUBLE	TRACK.
	FACING POINT	TRAILING POINT
	Cut Bank	Sundance
	Summit	Fort Piegan
	Blacktail	Meriwether
	Singleshot	Essex, east crossover
	Essex, west crossover	Pinnacle
	Columbia Falls, east crossover	Columbia Falls, west crossover Half Moon

12. SPRING SWITCHES WITH FACING POINT LOCK.

Triple Divide, east and west siding switch. Glacier Park, east and west siding switch. Rising Wolf, west siding switch. Normal position is for main track Nimrod, east and west end of double track. Red Eagle, end of double track, east switch eastward siding. Normal position is for eastward main track. Belton, east and west siding switch. Normal position is for main track. Conkelley, end of double track. Normal position is for westward main track. Whitefish, end of double track. Normal position is for eastward main track. West lead switch. Normal position is for main track. 13. DRAGGING EQUIPMENT DETECTOR INDICATORS. Westward, on signal: 1136.1, one mile east of Glacier Park. Westward, on Mast: East end Snowshed 4-C. One mile west of Blacktail. Westward, on signal: 1164.3, just east of east switch, Nimrod. 1000 ft. west of M.P. 1190, 5 miles west of Red Eagle. 1173.1, 3½ miles west of Essex.

- 1203.9, at east siding switch Coram.
- Eastward, on signal: 1205.6, one mile west of Coram.
- Eastward, on Cable Post: Opposite signal 1181.7, 3½ miles east of Red Eagle. Eastward, on signal: 1170.2, at West switch Essex.
- Eastward, on Cable Post:
- West end curve 54, one mile west of Glacier Park. Eastward, on signal:

1092.0, one mile west of Cut Bank.

14. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Cut Bank-end of double track east and west end Bridge 1090.8. SummitEnd of Double track. East switch westward siding.

Switch at end of double track and westward siding above points controlled by operator at depot.

When a yellow indication (normally dark) is displayed below two red indications on the governing home signal, it insures route is lined and locked and confers authority (AFTER STOP-PING) to pass through Interlocking Limits at restricted speed, then proceed in accordance with train rights and operating rules expecting to find track occupied beyond Interlocking Limits.

15. AUTOMATIC INTERLOCKINGS.

Nimrod	Single Trac	ek I	Bridge 1	165.3.
	End			
	End			
	End			
Nimrod ·				

Routes through interlocking operate automatically for all train and engine movements from eastward or westward main tracks to single track. When movement from single track is to be made against current of traffic, spring switch must be reversed by hand, and returned to normal position after train or engine has completed movement through switch.

Releases for normal movements, and movements from reverse main track are located at governing home signal. Westward trains may hold interlocking for a period of six min-

utes by operating push button at westward home signal. Instructions for operation of release and cranks located in boxes locked with switch locks.

Trains and engines approaching interlocking holding instructions requiring them to wait to permit other trains or engines to move through interlocking will stop before passing "Approach Con-trol Nimrod" sign for track they occupy and wait until their train rights permit them to proceed.

At eastward and westward home signals a switch key controller fastened to the side of the instrument house near the home signals and a third switch key controller placed in the depot

at inspection point for westward trains just east of interlocking, to assist in moving trains when home signal displays Stop-indi-cation account plugs in slide fence pulled out. When trains or engines receive a Stop-indication at home signal and no conflicting train movement is evident, trainmen should operate key controller by inserting switch key in controller and turning clockwise toward R, holding in that position for a few seconds. If home signal clears after operating key controller, train may proceed through interlocking at restricted speed, looking out for rocks or other obstructions fouling track. If home signal does not clear by operation of key controller, train must be governed by train rights, Interlocking Rules and Special Instructions stated above.

A work train key controller, so marked, is located on side of instrument house at west end of interlocking. Work train oc-cupying eastward approach track can release interlocking for other train movements by inserting switch-key in controller and turning clockwise toward R, holding key in that position for a few seconds. To clear home signal again for work train movement to single track, key controller must be operated counterclockwise toward N.

Red Eagle, Conkelley and Whitefish:

Interlockings operate automatically for all movements except from single track to double track against the current of traffic which requires hand operation of switches. Manual Controls and instructions for their operation are in iron box locked with a switch lock.

16. SWITCH INDICATORS.

Essex, indicators are provided for movements from westward siding to or across main tracks and separate indicators for eastward and westward main tracks. Member of crew who is to line switches must first operate push button "R" for route desired and hold few seconds. Both trainman and engineer must ob-serve and be governed by indicator before lining switches or farding main track. fouling main track. Push buttons and instructions are in iron box locked with switch lock.

17. INSTRUCTIONS GOVERNING OPERATION OF TRAINS AND ENGINES WITHIN CENTRALIZED TRAFFIC CON-TROL SYSTEM.

CTC extends between end of double track Blackfoot and west switch of siding north of main track Browning.

Browning is the control station for the CTC under control of operator under the supervision of train dispatcher.

Controlled siding is located at:

located at:

Browning—North of Main track. Non-Controlled sidings are

Blackfoot-South of Main track,

cap. 104 cars. Browning—South of Main track, cap. 104 cars.

Switches of non-controlled sidings are hand operated and equipped with electric locks. Before using non-controlled sidings permission must be obtained from train dispatcher.

All main track switches within CTC, except switches at controlled sidings, are hand operated and equipped with electric locks governed by Rule 283.

SECOND SUBDIVISION

(Main Line)

- 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS. Passenger Freight Between 79 MPH 50 MPH Whitefish and Troy SPEED RESTRICTIONS. 2. Eastward Freight Track between Tobacco 30 MPH and Fortine TRAIN REGISTER EXCEPTIONS. Troy, First class trains and passenger extras register by ticket. Trego, do not spot cars within 300 feet of public crossing. Track north of main track extending between Fortine and To-bacco is known as EASTWARD FREIGHT TRACK and must be used by eastward trains only, except first class and passen-Б.
- ger extras unless otherwise instructed by train order. Trains using this track will comply with Rule 99 and will display markers as though running against the current of traffic on double track.

When a train is given right over an opposing train to the end of EASTWARD FREIGHT TRACK at either Fortine or Tobacco and the opposing train has not arrived at the point last named in the order, the train thus given right is not required to wait for the opposing train and will proceed on its regular track, but must not go beyond the other end of the EASTWARD FREIGHT TRACK unless the second named train has arrived or is directed by train order to do so, or when time table authority will permit movement beyond. Crossover at Fortine located 7500 feet west of east switch is

known as FORTINE CROSSOVER

Crossover at Tobacco located 7500 feet east of west switch is known as TOBACCO CROSSOVER.

Normal position of crossover switches on EASTWARD FREIGHT TRACK is for through movement on that track.

- 6. Tobacco, short track south of main track will be known as No. 1 track, capacity 45 cars, and must be kept clear except when being used by trains. Normal position industry track switches for No. 1 track.
- 7. Troy, outgoing crews of freight trains will make running inspection of train.

SPRING SWITCHES WITH FACING POINT LOCK. Whitefish, west lead switch. Vista, east and west siding switch. Lupfer, east and west siding switch. Radnor, east and west siding switch. Stryker, east and west siding switch. Trego, east and west siding switch. Fortine, east switch eastward freight track. Eureka, east and west siding switch. Rexford, east and west switch, eastward siding. Stonehill, east and west siding switch. Ural, east and west siding switch. Volcour, east and west siding switch. Yarnell, east and west siding switch. Ripley, east and west siding switch. Normal position is for main track.

9. DRAGGING EQUIPMENT DETECTOR INDICATORS. WESTWARD, on CABLE POST: East end curve 369, four miles East of Rexford.

WESTWARD, on SIGNÁL:

1334.1, one mile east of Libby.

EASTWARD, on SIGNAL:

8.

1338.0, At west switch at Libby.

1277.8. Two miles east of Rexford.

10. HANDLING OF AIR CONDITIONED EQUIPMENT AND DIESEL ENGINES IN TUNNELS.

Should a passenger train, irrespective of the type of power being used, be stopped in tunnel, air conditioned cars within the tunnel must immediately have the air conditioning system, including ice engine and engine generator, shut off, fresh air intake shutters closed, and blower fans shut off.

Power plants and steam generators on diesel engines and heater cars should be shut down. Should a diesel power train be stopped with the engine in a tunnel and it is found that, in the case of passenger trains it cannot be moved within a reasonable length of time, trainmen and enginemen must take necessary precautions to prevent movement. Independent brake and sufficient hand brakes must be immediately applied.

11. MANUAL SWITCHES. INTERLOCKINGS WITH DUAL CONTROL

TobaccoWest switch Eastward Freight Track. Tobacco, switch is controlled by operator at Eureka. Troy, east and west switch of long lead north of main track,

controlled by operator at depot.

12. SWITCH INDICATORS.

Fortine, eastward trains on Eastward Freight Track which must wait for main line trains to pass before their train rights permit them to proceed to main track will stop before passing sign "WAIT HERE" in order not to interfere with train movements on main track. See further instructions posted in iron box.

13. INSTRUCTIONS GOVERNING OPERATION OF TRAINS AND ENGINES WITHIN CENTRALIZED TRAFFIC CON-TROL SYSTEM.

CTC extends between west siding switch Libby and M.P. 1353.4 about one-half mile east of depot Troy.

Troy is the control station for the CTC under control of operator under the supervision of train dispatcher at Spokane. Controlled siding is

located at:

Kootenai Falls.

All main track switches within CTC, except switches at controlled sidings, are hand operated and equipped with electric locks governed by Rule 283.

THIRD SUBDIVISION

(Main Line)

1.	MAXIMUM PERMISSIBLE SPEED FOR TRAINS.
	Between Passenger Freight
	Troy and Hillyard 79 MPH 50 MPH
	Hillyard and Fort Wright 45 MPH 35 MPH
2.	SPEED RESTRICTIONS.
	Between Albeni Falls Spur and Diamond Match Mill10 MPH
	Newport, passenger trains through station limits
i	Mead, over switches and frogs on curves Aluminum
	Plant
	Spokane, all trains approach crossover east of bridge 270, and
	crossover west of Howard Street at restricted speed.
	Spokane, public crossing Howard Street 12 MPH
	other public crossings
	Bridge 270, Spokane, SP&S E-1, Z-6 20 MPH
	Bridge 273, Spokane, SP&S E-1 20 MPH
	SP&S Z-6 10 MPH
	Bridge 274, Fort Wright, SP&S E-1, Z-6 20 MPH

3. TRAIN REGISTER EXCEPTIONS.

Ft. Wright third subdivision trains will register by ticket.

Spokane, first class trains and trains originating or terminating at passenger station will register and receive clearance.

Hillyard, First class trains and passenger extras register by ticket

Register of regular trains at Hillyard will cover their arrival at Dean.

Troy, First class trains and passenger extras register by ticket.

- 4. Troy, outgoing crews of freight trains will make running inspection of train.
- Dean, normal position of junction switch, Sixth Subdivision, is 5. for Third Subdivision.
- A proceed indication on the governing Eastward home signal at 6. Ft. Wright will confer authority to eastward inferior trains to run ahead of eastward superior trains from Ft. Wright to Hillyard, with the current of traffic, without train order authority.
- CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). Spokane, clearance issued and signed by the Superintendent will confer the same authority to a first class train as though received at its initial station.

kane.

Spokane.

ger depot.

Spokane.

Trailing point. MP 1473.14 west of Hillyard.

MP 1476 east of UP. RR. cross-

ing, Spokane. MP 1476.69 on Br. 269, Spo-

MP 1477.12 east of Br. 270,

MP 1477.61 (Scissors) on Br. 273 west of Spokane passen-

MP 1478.41 west of Br. 273,

8. CROSSOVERS ON DOUBLE TRACK.

Trailing Point.

Inland Sawmill Inc., 1.9 miles east Mead. Mead.

Facing point. MP 1477.22 east of Br. 270, Spokane. MP 1477.61 (Scissors) on Br. 273 west of Spokane passenger depot.

9. SPRING SWITCHES WITH FACING POINT LOCK.

Yakt, east and west siding switch. Leonia, east and west siding switch. Crossport, east and west siding switch. Bonners Ferry, west switch eastward siding. Elmira, east and west siding switch. Naples, east and west siding switch. Colburn, east and west siding switch. Laclede, east and west siding switch. Newport, west switch eastward siding. Scotia, east and west siding switch. Camden, east and west siding switch. Milan, east and west siding switch. Normal position is for main track. Dean, end of double track. Normal position is for westward main track.

10. SPRING SWITCHES WITHOUT FACING POINT LOCK. Hillyard, east end yard, connection of east yard lead to track No. 5.

Normal position is for track No. 5.

11. DRAGGING EQUIPMENT DETECTOR INDICATORS. Westward, on signal: 1346.3, approximately two miles west Yakt.

1355.9, approximately four miles west Leonia.

Westward, on cable post:

Opposite signal 1422.6, approximately 4000 ft. east of Bridge 244.

Westward, on signal:

1427.3, approximately one mile east of Bridge 249. 1437.5, approximately two miles west Penrith.

- Eastward, on signal:
- 1454.6, just west of Milan.

Eastward, on cable post: 1200 ft. west of signal 1429.0, one-mile west of Bridge 249. Eastward, on signal:

1424.8, approximately one mile west of Bridge 244.

Eastward, on cable post: 4000 ft. west of Tunnel 10.2, three miles east of Naples. Eastward, on signal:

1352.2, five miles east of Katka.

- 1344.0, just west of Yakt.
- 12. HANDLING OF AIR CONDITIONED EQUIPMENT AND DIESEL ENGINES IN TUNNELS.

Should a passenger train, irrespective of the type of power being used, be stopped in tunnel, air conditioned cars within the tunnel must immediately have the air conditioning system, including ice engine and engine generator, shut off, fresh air intake shutters closed, and blower fans shut off.

Power plants and steam generators on diesel engines and heater cars should be shut down. Should a diesel power train be stopped with the engine in a tunnel and it is found that, in the case of passenger trains it cannot be moved within a reasonable length of time, trainmen and enginemen must take necessary precau-tions to prevent movement. Independent brake and sufficient hand brakes must be immediately applied.

13. MANUAL INTERLOCKING.

Spokane, 1.17 miles east of,UP RR. cro Fort WrightEnd of double track and SP&S R	ssing. y Jct.
Whistle signals for routes:	
Spokane, UP RR. crossing:	
Main track1 long.	
GN-SI Ry Transfer No. 11 long, 1 short.	
GN-SI Ry Transfer No. 2	
Fort Wright:	
Main Track GN Ry1 short, 1 long.	
Main Track SP&S Ry1 long, 1 short.	
Siding GN Ry2 long, 1 short.	

14. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Troy, east and west switch of long lead north of main track controlled by operator at depot.

Hillyard......End of double track east and west end of yard. Interlocking includes interlocked switches at east end of yard (end of double track, yard lead, and safety switch); at west end of yard (end of double track, yard lead and spike yard lead) and the single main track between them electrically controlled by operator at depot.

The "home signal limits" (Rule 605) of this interlocking for train and engine movements on main track extend from the westward home signals at east end of yard to eastward home signals at west end of yard.

Trains and engines receiving a proceed indication of the governing home signal will proceed, regardless of class, in accordance with Rule 605, observing all governing signal indications.

Instructions for operation of Electric locks and Releases posted in iron boxes locked with switch lock.

Whistle signals for routes west end of yard:

Eastward trains,

To yard1 long, 1 short.

Westward trains,

15. AUTOMATIC INTERLOCKINGS.

Dean......End of double track. Interlockings operate automatically for all movements except from single track to double track against the current of traffic which requires hand operation of switches.

Push buttons and instructions for their operation are in iron box locked with a switch lock.

16. SWITCH INDICATORS.

ALBENI FALLS SPUR: Indicator for movements from spur track to main track.

MEAD, at both ends of siding. The member of the crew who is to line switch must first operate Switch-Key-Controller clockwise towards "R" and hold a few seconds before removing key. Both Trainman and Engineer must observe and be governed by the indication before lining switch or fouling main track. If yellow light is displayed and intended movement is not made, insert key in controller and turn counter clockwise toward "N" to restore signal system to normal condition to avoid delay to trains on main track. Switch-Key-Con-troller must NEVER be operated towards "N" after having been operated towards "R" if intended movement to main track is to be made.

Dean, indicator for movements from Sixth Subdivision to Third Subdivision.

The member of crew who is to line the switches must first operate push button "R" for route desired and hold few seconds. Both trainman and engineer must observe and be governed by indicator before lining switches or fouling main track. Push button and instructions in iron box locked with a switch lock.

17. CROSSING SIGNALS.

Bonners Ferry—Highway Crossing. Sandpoint—Highway Crossing.

Priest River-Highway Crossing.

Spokane-Cedar Street.

Mead—Highway Crossing West of West Switch Automatic grade crossing signals at Highway crossings are equipped with Key Controller for Manual Control of crossing signals. To set the crossing signals to flash red—insert switch key in Switch Key Controller and turn clockwise, leave key in Controller until engine or cars are on bonded section of rail on highway crossing then key can be removed and signals will operate automatically.

- 18. Double track extends between Hillyard and Fort Wright, except over bridge 274 and S.P.&S. Jct. which is governed by interlocking signals.
- 19. Spokane, Trent avenue crossing protected by watchmen between hours 7:00 A.M. and 11:00 P.M. daily, outside these assigned hours a member of crew must be on ground at crossing to protect movement.
- 20. Spokane, City Ordinance prohibits sounding engine whistle within city limits, except to prevent accident not otherwise avoidable, or to signal an interlocking, or to communicate with a flagman.

FOURTH SUBDIVISION

(Kalispell Line)

1.	MAXIMUM PERMISSIBLE SPEED FOR 1	TRAINS.	
	Between	Passenger	Freight
	Columbia Falls and Kalispell	40 MPH	30 MPH
	Kalispell and Somers	15 MPH	15 MPH

- 2. SPEED RESTRICTIONS. Bridges 145 and 146, Kalispell..... 10 MPH Kalispell, all trains over main street crossing..... 5 MPH 3. ENGINE RESTRICTIONS.
- Engines heavier than 250,000 pounds prohibited.

FIFTH SUBDIVISION

(K. V. Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS. Between

Bonners Ferry and Port Hill, all trains10 MPH 2. Diesels heavier than 250,000 pounds prohibited.

- Additional units must be separated not less than five cars.
- 3. Bonners Ferry, normal position of junction switch, Fifth Subdivision, is for eastward siding.
- WRECKING DERRICK X-1740. Bonners Ferry to Port Hill-Prohibited.

SIXTH SUBDIVISION

(Kettle Falls-Nelson Lines)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	
Troup Jct. and South Nelson	15 MPH
South Nelson and Kettle Falls	OO MDII
Kettle Falls and Dean	30 MPH

- 2. SPEED RESTRICTIONS. Northport, wye tracks 8 MPH
- 3. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B). (a) Great Northern clearance received at Nelson will clear train at Troup Jct.
 - (b) Kettle Falls, all trains must secure clearance.
- 4. Troup Jct., northward trains must stop clear of junction switch before entering Canadian Pacific main track and know track is clear.
- 5. Northport-Waneta, trains will not pass International Border without permission of Customs and Immigration Inspectors.

SWITCH INDICATORS. Dean, indicator for movements from Sixth Subdivision to Third Subdivision. Member of crew who is to line switches must first operate push button "R" for route desired and hold few seconds. Both trainman and engineer must observe and be governed by indicator before lining switches or fouling main track. Push buttons and instructions for their operation are posted in iron box locked with a switch lock.

WRECKING DERRICK X-1740. 7. Dean to Erie, B.C.---Max. Speed 20 MPH Erie, B.C. to Nelson, B.C.—Prohibited.

SEVENTH SUBDIVISION

(Republic Line)

- 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS. Between Kettle Falls and Republic 20 MPH
- 2. SPEED RESTRICTIONS.
- 3. Kettle Falls, normal position of junction switch is for Sixth Subdivision.
- 4. Laurier-Danville, trains will not pass International Border with-out permission of Customs and Immigration Inspectors.
- 5. WRECKING DERRICK X-1740. Kettle Falls to Laurier-Max. Speed 15 MPH Laurier to Republic-Prohibited.

EIGHTH SUBDIVISION

(Coeur d'Alene Line)

- 1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS. Between
- 2. SPEED RESTRICTIONS.

3. RESTRICTED CLEARANCES.

Bridges C 7.7, 7.8 and 7.9 3200 feet west Millwood, restricted side clearance.

Spokane, bridges 1.3, 1.5 and 1.6 will not clear man on top or sides of cars or engines. Train and enginemen must keep off top or side of cars and engines while passing over bridges, except in emergency and then use extreme caution.

- 4. Coeur d'Alene, trains and engines must stop before passing over 11th Street and Mullan Avenue crossings and movement must be protected by flagman on the ground at the crossing.
- Coeur d'Alene, trains and engines must stop and sound two blasts of engine whistle before proceeding over Diamond Drill 5. Crossing.
- Operation between Spokane Bridge and Coeur d'Alene, is joint with CMStP&P RR and their Time Table and Special Instructions govern. tions govern. Trains leaving Spokane will be cleared thru Great Northern dispatcher to Spokane Bridge and will be cleared at Spokane Telegraph office by CMStP&P RR dispatcher for movement from Spokane Bridge to Coeur d'Alene. Train leaving Coeur d'Alene will be cleared by Great Northern dispatcher for movement from Spokane Bridge to Spokane and by CMStP&P RR dispatcher at their office in Coeur d'Alene for movement from Coeur d'Alene to Spokane Bridge to Read by CMStP&P RR dispatcher at
- 7. MANUAL INTERLOCKINGS.

to Spokane Bridge.

Spokane, 0.85 miles west of ______N.P. Crossing. Whistle signal for G.N. to U.P. main track_____2 long 1 short. Trains moving from Eighth Subdivision to U.P. R.R. tracks will be governed by dwarf signal located at base of westward twoarm interlocking home signal.

8. WRECKING DERRICK X-1740. Spokane to Coeur d'Alene-Prohibited.

NINTH SUBDIVISION

(Moscow Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

2. SPEED RESTRICTIONS.

3. Operation between N.P. Crossing on Ninth Subdivision and U.P. R.R. Junction, 2.60 miles west of West Fairfield, is joint with U.P. R.R. and their timetable and special instructions will govern. Train movements between N.P. Crossing and Dishman will be governed by remote controlled signals located at N.P. Crossing, at east and west ends of new yard, and east end of siding at Dishman. Indications of such signals will supersede the superiority of trains between these points. When one of these remote controlled signals displays Stop-indication, member of crew must communicate with operator and be governed by his instructions in accordance with Rule 509 (A).

Trains leaving Spokane will be cleared at Spokane Telegraph office for operation east of U.P. R.R. Junction and cleared at Dishman by U.P. R.R. dispatcher for movement Dishman to U.P. R.R. Junction, 2.60 miles west of West Fairfield. Trains leaving U.P. R.R. Junction for movement over Union Pacific line will be cleared by U.P. R.R. dispatcher at Fairfield on the U.P. R.R.

Trains will register at N.P. Crossing by ticket.

Normal position of U.P. R.R. Junction switch is for Great Northern main track.

Telephone in booth near U.P. R.R. Junction to enable Great Northern crews to call the operator at Fairfield.

4. WRECKING DERRICK X-1740. Spokane to Moscow-Prohibited.

TENTH SUBDIVISION

(Colfax Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS. Between

Spring Valley and Colfax 25 MPH

- 2. RESTRICTED CLEARANCES. Colfax tunnel and bridges 71.6, 72.8 and 72.4 will not clear man on top or sides of cars and engines.
- 3. Colfax, trains and engines while switching or moving in and out of depot must use extreme care in passing over North and Last Streets account restricted view.
- 4. SEMI-AUTOMATIC INTERLOCKINGS. Colfax, 0.29 miles west ofUP RR crossing Normal position is stop for Great Northern. Instructions for operation are posted in box locked with a switch lock.
- 5. RAILROAD CROSSING PROTECTED BY GATES. Thornton, 0.57 miles west ofUP RR crossing Normal position is stop for Great Northern.

6. WRECKING DERRICK X-1740. Spring Valley to Colfax—Prohibited.

18

5.50

BUSINESS TRACKS NOT SHOWN AS STATIONS ON TIME TABLE

¥


Name	Location	Capaci- ty Cars	Switch Opens	Name	Location	Capaci- ty Cars	Switch Opens
Subdivision No. 1				Subdivision No. 6			
Essex Pit	2.97 miles west Essex	50 {	East ww trk	Baskins Spur Salmo Gravel Spur	1.9 miles south of Ymir 1.75 miles south of Salmo	16 15	North South
Tie Spur	1.39 miles east Coram 779 feet west of end of double	10	East	Archibald Spur.	1.0 mile south of Erie	3	South
Conkelley Pit	779 feet west of end of double	31 {	West	Benton Spur	2.0 miles south of Meadows 3.2 miles south of Meadows	6 9	South Both
Annon de Alerrineen Co	track Conkelley	l (ww trk	Hearn Bros. Spur	0.3 mile north of Parks	3	North
Anaconda Aluminum Co. Storage Track	0.59 mile west of end of double track Conkelley	114 {	Both	Work Spur.	2.1 miles north of Columbia Gardens	3	South
-	1.01 miles south of Columbia	<u>ا</u>	ww trk	C. M. & S. Co. Spur	0.7 mile north of Waneta	34	North
_	Falls	4	East	Stroh Spur	5.33 miles north of Northport.	4	South
Rocky Mountain Lumber Co.	1.25 miles south of Columbia Falls	9	East	Kanes Spur	3.3 miles south of Northport 4.1 miles south of Northport	10	South South
Spar				Harpers Spur.	4.5 miles south of Northport.	17	North
Subdivision No. 2	•			Dolomite Quarry Spur	1.3 miles south of Marble, in- cluding trackage of Spokane-		
Warland Pit (Five Tracks)	2.1 miles west Warland 4.8 miles east Libby (MP	148	Both		Portland Cement Co., Pri-		
Zonolite Siding	4.8 miles east Libby (MP 1331)	49	Both	Hendrix Cut	vate Yard 3.8 miles north of Bossburg	251 3	South South
	1991)	- 10	Dom	Blue Creek	3.1 miles south of Addy	19	Both
Subdivision No. 3	2.0 miles east of Crossport	15	East	Alloy Industry Kulzer's Spur	3.0 miles north of Chewelah 1.7 miles south of Valley	19 6	Both North
Idaho-Boyd Conlee Spur	2.0 miles east of Crossport 0.71 mile east Bonners Ferry	36	West	Silica Sand Co. Spur	1.0 mile north of Springdale.	8	South
Pack River Lbr. Co. Spur	0.6 mile east Colburn 0.8 mile east Colburn	22 58	West West	Loon Lake Gravel Spur	1.5 miles north of Loon Lake.	40	North
Albeni Falls Spur	2.7 miles east Newport 3.5 miles west Newport	28	East	Subdivision No. 7			
Penrith Spur	3.5 miles west Newport	19 12	East East	Harter Lumber Co	1.02 miles west of West Kettle	10	Both
Inland Sawmills Inc. Spur	1275 ft. east of Depot, Newport 1.9 miles east Mead	34	East	Matneys Spur	Falls. 2.72 miles west of West Kettle	10	
-				Spokane-Portland Cement	Falls	4	East
				Co. Spur	1.1 miles east of Boyds	12	East
Subdivision No. 4 Soldiers Home Spur	1.04 miles much of Columbia			Talisman Mining Co	2.5 miles east of Laurier 3.4 miles east of Grand Forks.	5 2	Both East
Soldiers Home Spur	Falls	2	East	Consolidated Mining and			Last
Montana Saw Service Co.		-	Treat	Smelting Co. Spur	1.1 miles east of Grand Forks.	12	West
Spur	3.3 miles east of Kalispell	3 3	East West	San Poil Spur	0.4 mile west of Grand Forks. 1.25 miles west of Torboy	3 8	East East
Northwestern Lbr. Co. Spur.	2.6 miles east of Kalispell 1.3 miles east of Kalispell	47	East	-	• • • •		
Carter Oil Co. Spur	1.2 miles east of Kalispell 44 feet west of west wye	9	East	Subdivision No. 8			
	switch. Kalispell	27	Both	Winton Lumber Co	1.5 miles west of Coeur d'Alene 2.6 miles west of Coeur d'Alene	16	West
Forest Products Co. Spur Mills Lumber Co. Spur	On interchange track 2200 feet west of west wye	6	West	Post Falls.	8.46 miles west of Coeur d'Alene	34 12	Both Both
	switch, Kalispell 4.1 miles west of Kalispell	4	East	Post Falls Lumber Co	8.46 miles west of Coeur d'Alene	6	East
Duffy Spur Northwest Timber Co. Spur	4.1 miles west of Kalispell 4.4 miles west of Kalispell	$\frac{8}{25}$	East West	Carders.	2.14 miles east of Greenacres 1.24 miles west of Flora	5	Both West
Erickson Bros. Spur.	4.6 miles west of Kalispell 4.5 miles west of east wye	4	East	Vera Industrial Spur	1.17 miles west of Flora	5	East
Batavia Spur	4.5 miles west of east wye	10	East	Includes True's Oil Spur Opportunity		3 24	West East
Kila	switch, Kalispell 8.8 miles west of east wye			West Apple Center		4	West
Ore Spur	switch, Kalispell	34	Both			9 21	East West
	switch, Kalispell	14	East	-			
				Subdivision No. 9 Estes	3.22 miles west of Moscow	15	Both
Subdivision No. 5				Ringo.	3.79 miles west of Viola	7	West
Quarry Spur	1.3 miles east Bonners Ferry. 1.5 miles east Bonners Ferry.	4	West East	Longwill Seabury	1.39 miles west of Sokulk 2.39 miles west of Geary	5 11	East Both
Allen's Spur	4.7 miles east Bonners Ferry.	8 6 2	East	Jefferson.	3.49 miles west of Spring Valley	6	Both
Watson's Snur	111 5 miles east Bonners Ferry.	2 4	West East	Mt. Hope Industrial Spur Old West Fairfield	2.93 miles west of Waverly		East Both
Camp 5 Spur	13.2 miles east Bonners Ferry. 14.1 miles east Bonners Ferry.	11	Both	Öld Mt. Hope		44	Both
Seelover's Spur.	15.4 miles east Bonners Ferry.	$\frac{2}{4}$	East West	Subdivision No. 10			
Edward's Spur	17.5 miles east Bonners Ferry. 18.5 miles east Bonners Ferry.	8	West	Manning	5.65 miles west of Colfax	6	West
Camp 8	19.7 miles east Bonners Ferry.	18 4	Both West	Blackwell Stoneham	1.92 miles east of Steptoe 2.95 miles west of Thornton	16 5	Both East
Houck's Spur	21.8 miles east Bonners Ferry. 22.2 miles east Bonners Ferry.	4	West	Balder	4.34 miles east of Rosalia 2.59 miles east of Spring Valley	13	Both
	24.6 miles east Bonners Ferry.	5	West			11	East

	SPEED TABLE					
	Time Min.	Per Mile Sec.	Miles Per Hour	Time Min.	Per Mile Sec.	Miles Per Hour
		40	90.0	1	12	50.0
		41	87.8	1	14	48.6
		42	85.7	1	16	47.4
		48	88.7	1	18	46.2 45.0
		44	81.8	1 .	. 20	45.0
и И		45	80.0	1	22	48.9
		46	78.3	1 1	24	42.9
77 - 12 11		47	76.6	1	26	41.9
Kalispell		48	75.0	1	28 80	40.9
Whitefish		49	78.5	1 1	80	40.0
		50	72.0	1	88	88.7
Troy and Libby.		51	70.6	1	36	87.5
Bonners Ferry, Idaho		52	69.2	1	89	36.4
		53	67.9	1	42	85.8
Newport, Wash.		54	66.7	1	45	34.8
kane (Hillyard), Wash.		55	65.5	1	50	32.7
		56	64.8	1	55	81.8
on St., Spokane, Wash.		57	68.2	2	· · · · ·	30.0
		58	62.1	2	10	27.7
		59	61.0	2	20	25.7
	1	Ō	60.0	2	80	24.0
	1	1	59.0	2	40	22.5
	1	28	58.1 57.1	1 2 2 2 2 2 2 2 2 3 3 4 5 6 7		20.0 17.1
	1	8	57.1	3	80	17.1
	. 1	4	56.8	4		15.0
	1	5	55.4	5		12.0
	1	6	54.5	6		10.0
	1	78	58.7 52.9 52.2	7 · ·	·	8.6
	1	8	52.9	8		7.5
	1	9	52.2	9		6.7
	1	10	51.4	10		6.0

.

WATCH INSPECTORS

Burr's Jewelry Whitefish Log local crews may compare time at depot, Troy and Libby. R. C. Wickstrom Jewelry Store Bonners Ferry, Idaho A. F. Benson Newport, Wash. H. H. Trowbridge 5012 No. Market, Spokane (Hillyard), Wash. H. J. March N. 221 Washington St., Spokane, Wash.	Franklin P. Wheeler	Kalispell
 R. C. Wickstrom Jewelry StoreBonners Ferry, Idaho A. F. BensonNewport, Wash. H. H. Trowbridge5012 No. Market, Spokane (Hillyard), Wash. H. J. MarchN. 221 Washington St., Spokane, Wash. 	Burr's Jewelry	Whitefish
 A. F. Benson	Log local crews may compare time at d	lepot, Troy and Libby.
H. H. Trowbridge5012 No. Market, Spokane (Hillyard), Wash. H. J. MarchN. 221 Washington St., Spokane, Wash.	R. C. Wickstrom Jewelry Store	Bonners Ferry, Idaho
H. J. MarchN. 221 Washington St., Spokane, Wash.	A. F. Benson	Newport, Wash.
	H. H. Trowbridge5012 No. Marke	t, Spokane (Hillyard), Wash.
	H. J. MarchN. 221 Wa	ashington St., Spokane, Wash.
		• •

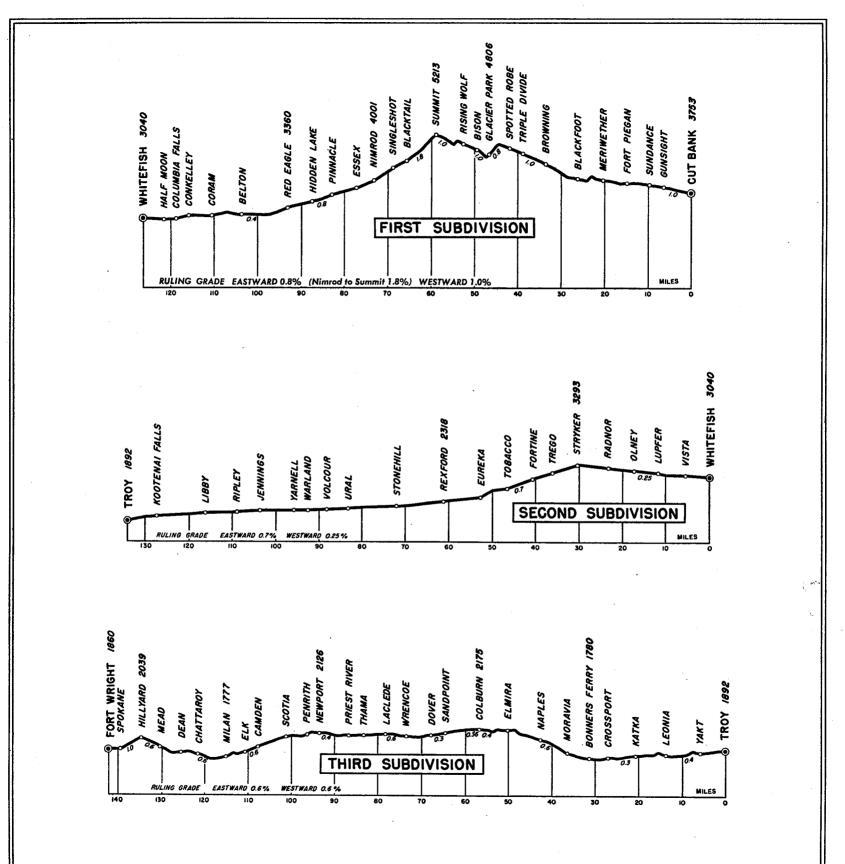

Pages 22, 23 and 24 are blank.