



COMPANY SURGEONS

*Dr. Abbott Skinner, Chief Surgeon St. Paul
 *Dr. Charles T. Eginton, Assistant Chief Surgeon..... St. Paul
 Dr. R. K. West Cut Bank, Montana
 Dr. S. D. Whetstone Cut Bank, Montana
 Dr. T. B. Moore Kalispell, Montana
 Dr. W. F. Bennett Columbia Falls, Montana
 *Dr. J. B. Simons Whitefish, Montana
 Dr. James E. Murphy Whitefish, Montana
 Dr. Robert D. MacKenzie Libby, Montana
 Dr. William T. Matthews Troy, Montana
 *Dr. R. M. Bowell Bonners Ferry, Idaho
 Dr. Frans H. Siemsen Sandpoint, Idaho
 Dr. R. B. Morrow Newport, Wash.
 *Dr. E. B. Coulter Spokane, Wash.
 Dr. Robert J. Albi Hillyard, Wash.
 Dr. C. M. Canning Colville, Wash.
 *Dr. G. R. Callbeck Nelson, B. C.

*Designates also Examining Surgeon.

OPHTHALMIC SURGEONS

(Eye Doctors)

Dr. H. D. Huggins Kalispell, Montana
 Dr. Philip B. Greene Spokane, Wash.

D. H. CARPENTER, Chief Dispatcher.
 W. J. BARKE, Trainmaster.
 F. H. MOORE, Trainmaster.
 P. A. FREUEN, Trainmaster.
 R. A. HARRIS, Trainmaster.
 O. E. FISHER, Asst. Superintendent.

Scanned from the Dean Ogle Collection

GREAT NORTHERN RAILWAY COMPANY

KALISPELL DIVISION

TIME TABLE 92

EFFECTIVE 12:01 A. M.

MOUNTAIN TIME

AND

PACIFIC TIME

Sunday, May 22, 1960

MOUNTAIN TIME GOVERNS FIRST, AND
THIRD SUBDIVISIONS.

**PACIFIC TIME GOVERNS SECOND, FOURTH,
FIFTH, SIXTH, SEVENTH, EIGHTH AND
NINTH SUBDIVISIONS.**

H. M. SHAPLEIGH, Superintendent.
 C. M. RASMUSSEN, General Manager.
 A. W. CAMPBELL,
 General Superintendent Transportation.

Printed in U.S.A.

2 WESTWARD

FIRST SUBDIVISION

EASTWARD

Station Numbers	Cur Capacity	FIRST CLASS		MOUNTAIN TIME Effective May 22, 1960 STATIONS	Telegraph Code	Distance from Toiy	SIGNS	FIRST CLASS		SECOND CLASS	
		31	27					32	28	494	492
		Daily	Daily					Daily	Daily	Daily	Daily

Station Number	Cur Capacity	Other Tracks	Sidings	Distance from Cut Bank	Time Over Subdivision Average Speed Per Hour	Station Name	Code	Distance from Toiy	Telegraph Code	Distance from Toiy	SIGNS	Time	Time	Time	Time	Time	Time	Time	Time	
1087	130	265		L	5.50 AM	CUT BANK. ★	CT	260.88	BDNK	P	A	9.25 AM	5.45 PM	4.45 PM	1.35 PM	7.40 AM				
1095	109	279		L	3.08 PM	SUNDANCE	CT	251.27	PRXW	P	A	9.12	5.34	4.30	1.17	7.25				
1112	120	279		L	3.37	BLACKFOOT	CT	234.63	DPY	P	A	8.52	5.16	4.00	12.47	7.01				
1120	127	180		S	3.48	BROWNING	BO	227.34	DNP	P	A	8.44	5.08	3.48	12.32	6.50				
1125	133	15		S	3.58	TRIPLE DIVIDE	BO	221.95	P	P	A	8.38	4.59	3.25	12.21	6.50				
1133	95	126		F	4.07	GLACIER PARK ★	MD	214.00	DNPW	P	A	8.28	4.49	3.10	12.01 PM	6.12				
1136	112	10		F	4.11	BISON		211.29	P	P	A	8.23	4.41	3.04	11.55	6.07				
1141	116	10		F	4.15	RISING WOLF		208.17	P	P	A	8.18	4.37	2.58	11.48	6.01				
1147	125	31		F	4.25	SUMMIT ★	SM	201.92	DNPYXW	P	A	8.09	4.29	2.45	11.33	5.45				
1153	60	9		F	4.36	BLACKTAIL		195.12	P	P	A	7.51	4.14	2.25	11.18	5.20				
1161	98	57		F	4.51	NIMROD		187.62	IP	P	A	7.33	3.58	1.55	10.48	4.55				
1165	136	109		S	4.58	ESSEX ★	SX	183.72	BOYXW	P	A	7.25	3.50	1.40	10.35	4.45				
1171	116	99		F	5.07	PINNACLE		178.06	IP	P	A	7.15	3.37	1.20	10.05	4.30				
1181	W 99	14		F	5.23	RED EAGLE	NY	167.86	IPP	P	A	7.00	3.21	1.250	9.25	4.10				
1192	156	91		F	5.40	BELTON ★	BE	157.20	DNPW	P	A	6.44	3.03	1.230	9.05	3.50				
1200	64	75		F	5.50	CORAM	CM	149.32	DP	P	A	6.32	2.50	1.212	8.45	3.35				
1204	122	122		F	5.57	CONNELLY		144.92	M	P	A	6.26	2.42	1.202 PM	8.37	3.25				
1207	83	214		S	6.02	COLUMBIA FALLS ★	CF	142.11	DNPYXW	P	A	6.22	2.38	1.155 AM	8.30	3.18				
1210	46	46		F	6.06	HALF MOON		139.18	P	P	A	6.18	2.31	1.145	8.20	3.10				
1215	1720	1720		L	6.15	WHITEFISH ★	WF	134.48	KRDWFP	P	A	6.10	2.25	1.130	8.01	3.01				
1220	151	151		F	6.27	VISTA		129.09	P	P	A	5.55	2.07	1.030	5.55	1.25				
1227	196	70		F	6.36	LUPPER		122.67	P	P	A	5.48	1.59	1.020	5.45	1.15				
1232	E 70	26		F	6.42	OLNEY	KY	117.21	DP	P	A	5.41	1.52	1.010	5.35	1.05				
1238	141	17		F	6.49	RADNOR		111.44	P	P	A	5.35	1.44	9.57	5.20	12.55				
1245	E 113	17		F	6.57	STRAKER ★	SV	104.37	DNPYW	P	A	5.28	1.36	9.40	5.08	12.40				
1251	136	15		F	7.03	TREGO		98.40	P	P	A	5.21	1.28	9.30	4.54	12.25				
1256	130	40		F	7.08	FORTINE	FR	93.78	DPW	P	A	5.14	1.21	9.15	4.45	12.10 AM				
1262	127	76		F	7.14	TOBACCO		87.86	M	P	A	5.07	1.12	8.55	4.37	11.50				
1267	128	4		F	8.01	VOLCOUR ★	VR	46.33	DNPW	P	A	4.17	12.18	7.15	3.00	10.42				
1282	138	5		F	7.56	UNAL		51.28	P	P	A	4.23	12.24	7.25	3.20	10.50				
1280	128	10		F	7.44	STONEHILL		62.34	P	P	A	4.35	12.36	7.45	3.57	11.05				
1276	E 170	163		S	7.32	REXFORD ★	RD	73.22	DNPYW	P	A	4.48	12.50	8.05	4.15	11.20				
1267	151	59		S	7.20	EUREKA ★	KA	82.10	DNPW	P	A	4.59	1.04	8.30	4.30	11.35				
1295	139	3		F	8.11	YARNELL		38.31	P	P	A	4.09	12.08 PM	6.59	2.50	10.30				
1308	152	3		F	8.27	RIPLEY		25.40	P	P	A	3.54	11.53	6.35	2.35	10.12				
1315	265	175		S	8.35	LIBBY ★	CR	18.18	DNPZW	P	A	3.45	11.41	6.20	2.10	10.00				
1326	178	697		F	8.50	KOOTENAI FALLS		7.17	P	P	A	3.31	11.24	5.50	1.45	9.45				
1332	288	697		F	9.05 PM	TROY ★	UX	0.00	KDNP	P	A	3.20 AM	11.15 AM	5.35 AM	1.30 PM	9.30 PM				

Westward trains are superior to eastward trains of the same class.
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 6 THROUGH 12.
See page 9 and 10 for CONDITIONAL STOPS.

WESTWARD

SECOND SUBDIVISION

EASTWARD 3

Station Numbers	Car Capacity		FIRST CLASS				Distance from Troy	Time Table No. 92		Telegraph Calls	Distance From Fort Wright	SIGNS	FIRST CLASS				SECOND CLASS
	Sidelings	Other Tracts	1 S. P. & S. No. 1 Daily	31 Daily	45 S. P. & S. No. 3 Daily	27 Daily		Effective May 22, 1960 PACIFIC TIME STATIONS					46 S. P. & S. No. 4 Daily	28 Daily	2 S. P. & S. No. 2 Daily	32 Daily	492 Daily
								Time Table No. 92									
1332	288	697		L 8.05Pm		L 11.35Am	0.00TROY★..... 6.49 YAKT..... 7.02 LEONIA..... 13.29CROSSPORT.....	UX	142.09	RDNPBK XIYW		A 10.10Am		A 2.20Am	A 7.35Pm	
1340	142	19		8.16		11.45	4.69SANDPOINT★..... 8.34WREHGOE..... 8.35 5.00LADLEDE..... 4.72THAMA.....	BY	110.78	DNPVYX JW		s 9.22		1.24	6.30	
1347	128	24		8.30		11.56	13.71PRIEST RIVER..... 6.57NEWPORT★..... 7.80SCOTIA..... 6.59OAMDEN.....	NA	99.41	DPW		f 9.07		1.11	6.07	
1360	132	10		8.57		12.18Pm	27.00MILAN..... 10.37DEAR..... 4.59MEAD.....		128.38	P		f 9.49		1.57	7.10	
1364	119	183		9.05		12.27	31.31SPOKANE★..... 1.17FORT WRIGHT..... 2.74		115.09	P		f 9.29		1.30	6.40	
1374	119	39		9.18		12.43	42.68HILLYARD★..... 4.53W. P. R. E. Green's		110.78	DNPVYX JW		s 9.22		1.24	6.30	
1383	130	32		9.26		12.52	50.07SPOKANE★..... 1.17FORT WRIGHT..... 2.74		92.02	P		f 8.57		1.03	5.52	
1390	116	11		9.33		1.00	54.89SPOKANE★..... 1.17FORT WRIGHT..... 2.74		85.20	P		f 8.49		12.56	5.39	
1398	105	395		9.41		1.10	65.23SPOKANE★..... 1.17FORT WRIGHT..... 2.74		76.86	DNPVY XZW		s 8.39		12.47	5.24	
1407	70	13		9.50		1.19	73.58SPOKANE★..... 1.17FORT WRIGHT..... 2.74		68.51	P		s 8.25		12.38	5.09	
1410	130	15		9.56		1.25	78.58SPOKANE★..... 1.17FORT WRIGHT..... 2.74		63.51	P		f 8.19		12.33	5.00	
1416	71	42		10.02		1.30	83.30SPOKANE★..... 1.17FORT WRIGHT..... 2.74		58.79	P		f 8.13		12.28	4.52	
1420	70	122		10.06		1.36	86.93SPOKANE★..... 1.17FORT WRIGHT..... 2.74		55.26	DP DNPOV XW		s 8.09		12.24	4.46	
1427	122	247		10.15		1.48	93.40SPOKANE★..... 1.17FORT WRIGHT..... 2.74		48.69	DNVYX JW		s 7.59		12.16	4.34	
1436	129	15		10.23		1.58	101.20SPOKANE★..... 1.17FORT WRIGHT..... 2.74		40.89	P		f 7.46		12.06Am	4.20	
1442	118	25		10.31		2.07	107.79SPOKANE★..... 1.17FORT WRIGHT..... 2.74		34.30	P		f 7.36		11.55	4.08	
1449	123	32		10.39		2.17	115.09SPOKANE★..... 1.17FORT WRIGHT..... 2.74		27.00	P		f 7.26		11.45	3.54	
1460	53		10.50		2.32	125.46SPOKANE★..... 1.17FORT WRIGHT..... 2.74		16.63	DNPXJ		f 7.13		11.32	3.35	
1464	164		10.55		2.38	130.05SPOKANE★..... 1.17FORT WRIGHT..... 2.74		12.04	P		f 7.06		11.26	3.25	
1469	3218		11.01		2.45	134.58SPOKANE★..... 1.17FORT WRIGHT..... 2.74		7.51	BRKDNP WOIXZY		f 7.00		11.20	L 3.15Pm	
1472		11.08		2.53	138.18SPOKANE★..... 1.17FORT WRIGHT..... 2.74		3.91	PIAVYX		f 6.50		11.10	
1473	609	L 11.59Pm	L 11.15 L 11.45	L 9.45Pm	L 3.00 L 3.30	139.35SPOKANE★..... 1.17FORT WRIGHT..... 2.74		2.74	RKDNP BXVZW IDNPYXY R	A 6.00Am	L 6.45 A 6.15	A 10.05Pm	L 11.05 A 10.35	
1477	69	65	A 12.04Am	A 11.50Pm	A 9.55Pm	A 3.35Pm	142.09SPOKANE★..... 1.17FORT WRIGHT..... 2.74	FW	0.00		L 5.51Am	L 6.10Am	L 9.55Pm	L 10.28Pm	
								Time Over Subdivision Average Speed Per Hour					.09 18.26	4.00 35.52	.10 18.44	3.52 36.75	4.20 31.10

WESTWARD THIRD SUBDIVISION EASTWARD

Station Numbers	Car Capacity		Distance from Columbia Falls	MOUNTAIN TIME		Telegraph Calls	Distance from Somers	SIGNS
	Sidelings	Other Tracts		Time Table No. 92				
				Effective May 22, 1960				
1207	214	0.00COLUMBIA FALLS★.....	CF	24.86	BJ RDNPYX		
WB 5	44	5.48LA SALLE.....		19.38	P BRDNP JWYXZ		
WB 14	439	14.34KALISPELL.....	K	10.52			
WB 25	Yard	24.86SOMERS.....	OB	0.00	BDPX		
				Time Over Subdivision Average Speed per Hour				

WESTWARD FOURTH SUBDIVISION EASTWARD

Station Numbers	Car Capacity		Distance from Port Hill	Time Table No. 92		Distance from Bonner's Ferry	Telegraph Calls	SIGNS
	Sidelings	Other Tracts		Effective May 22, 1960				
				PACIFIC TIME STATIONS				
KV 26	15	0.00PORT HILL.....		25.95			
KV 17	18	9.00COPELAND.....		16.95			
KV 8	15	18.38RITZ.....		7.57			
.....	25.39SPOKANE INT. RY. CROSSING.....		0.56			
1364	148	25.95BONNERS FERRY★.....	BY	0.00	RDNP BYXJV		
				Time Over Subdivision Average Speed Per Hour.				

Westward trains are superior to eastward trains of the same class on Second, Third and Fourth Subdivisions.
SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 6 THROUGH 13.

4 WESTWARD FIFTH SUBDIVISION EASTWARD

Station Numbers	Car Capacity		SECOND CLASS 703	Time Table No. 92 Effective May 22, 1960 PACIFIC TIME STATIONS	Telegraph Calls	Distance from Dean	SIGNS	SECOND CLASS 704
	Sidings	Other Tracks						
SA 186	L 6.00AmNELSON.....	BC	185.80	RDNWP	A 3.20Pm
BETWEEN TROUP JCT. AND NELSON BE GOVERNED BY C. P. RY. TIME TABLE AND RULES								
SA 181	0	0	L 6.30Am ^{5.48} TROUP JUNCTION.....		180.32	RYPV	A 2.45Pm
SA 176	0	24	6.55 ^{4.82} SOUTH NELSON.....		175.50		2.10
SA 166	0	15	7.40 ^{10.11} HALL.....		165.39		1.25
SA 159	0	12	8.05 ^{7.14} YMIK.....		158.25		12.57
SA 155	0	9	8.20 ^{4.35} BOULDER MILL.....		153.90		12.40
SA 152	0	75	9.00 ^{3.29} SALMO.....	SI	150.61	D	12.30
SA 148	0	15	9.10 ^{2.73} ERIE.....		147.88		12.05Pm
SA 145	0	20	9.25 ^{2.87} MEADOWS.....		145.01		11.55
SA 140	0	7	9.55 ^{4.92} PARKS.....		140.09		11.35
SA 136	0	33	10.45 ^{4.76} FRUITVALE.....		135.33		11.10
SA 130	0	15	11.15 ^{5.31} COLUMBIA GARDENS.....		130.02		10.45
SA 127	0	34	11.40 ^{3.84} WANETA, B. C.....		126.18	P	10.20
SA 126	0	39	11.50 ^{2.11} BOUNDARY, U. S.....		124.07		10.05
SA 116	60	89	12.40Pm ^{8.81} NORTHPORT.....	NP	115.26	PDYXW	9.30
SA 109	0	37	1.10 ^{8.27} MARBLE.....		106.99		8.25
SA 107	42	0	1.20 ^{1.23} DOLOMITE.....		105.76	P	8.20
SA 96	0	16	1.55 ^{10.24} BOSSBURG.....		95.52		7.50
SA 93	36	101	2.10 ^{3.38} EVANS.....		92.14	XP RKNW BYXOJPZ	7.35
SA 82	0	310	A 2.50Pm ^{10.40} KETTLE FALLS.....	MF	81.74		L 7.00Am
SA 77	0	13	 ^{5.31} PALMERS.....		76.43		
SA 73	0	109	 ^{3.17} COLVILLE.....	VD	73.26	PD	
SA 67	40	5	 ^{6.69} ARDEN.....		66.57	P	
SA 59	0	17	 ^{7.19} ADDY.....		59.38		
SA 50	81	149	 ^{9.07} CHEWELAH.....	CH	50.31	PDXZ	
SA 43	80	63	 ^{7.71} VALLEY.....	VY	42.60	PDYX	
SA 38	0	30	 ^{5.26} GRAYS.....		37.34	P	
SA 34	0	18	 ^{3.41} CLINE.....		33.93		
SA 33	39	17	 ^{1.25} SPRINGDALE.....		32.68	P	
SA 25	40	5	 ^{8.13} LOON LAKE.....		24.55	P	
SA 18	0	36	 ^{6.79} CLAYTON.....		17.76	P	
SA 13	50	49	 ^{5.28} DEER PARK.....	DE	12.48	PDX	
SA 9	0	25	 ^{3.60} DENISON.....		8.88	P	
SA 4	40	0	 ^{5.22} WAYSIDE.....		3.66	P	
1460	62	 ^{3.66} DEAN.....	SF	0.00	JDNX	
			8.50 11.78	Time Over Subdivision Average Speed Per Hour				8.20 12.49

Westward trains are superior to eastward trains of the same class.

WESTWARD SIXTH SUBDIVISION EASTWARD

Station Numbers	Car Capacity		SECOND CLASS 393	Time Table No. 92 Effective May 22, 1960 PACIFIC TIME STATIONS	Telegraph Calls	Distance from Kettle Falls	SIGNS	SECOND CLASS 394
	Sidings	Other Tracks						
SA 82	74	222	L 5.00AmKETTLE FALLS.....	MF	0.00	ORKDNB JYXPZ	A 4.10Pm
SD 5	0	106	5.20 ^{4.70} WEST KETTLE FALLS.....		4.70	P	3.45
SD 12	0	24	5.45 ^{7.39} BOYDS.....		12.09	P	3.15
SD 17	0	31	6.05 ^{5.39} BARSTOW.....		17.48		2.55
SD 22	0	31	6.30 ^{5.23} DULWICH.....		22.71		2.40
SD 29	0	12	7.00 ^{5.88} GOLDSTAKE.....		28.59		2.10
SD 35	0	18	7.30 ^{6.07} LAURIER, WASH.....		34.66	P	1.50
SD 46	0	5	8.15 ^{11.35} GRAND FORKS, B. C.....		46.01		1.10
SD 47	0	4	8.20 ^{1.46} GRAND FORKS JCT.....		47.47	YV	1.01
SD 49	0	18	8.30 ^{1.65} DANVILLE, WASH.....		49.12	P	12.55
SD 59	0	62	9.05 ^{10.40} CURLEW.....		59.52	P	12.15Pm
SD 65	0	33	9.20 ^{6.07} MALO.....		65.59		11.55
SD 72	0	18	9.40 ^{6.54} POLLARD.....		72.13		11.35
SD 76	0	34	9.50 ^{3.68} TORBOY.....		75.81		11.20
SD 81	75	A 10.10Am ^{4.91} REPUBLIC.....	Z	80.72	XBRKDYW	L 11.00Am
			5.10 15.62	Time Over Subdivision Average Speed Per Hour				5.10 15.62

Westward trains are superior to eastward trains of the same class.

WESTWARD SEVENTH SUBDIVISION EASTWARD

Station Numbers	Car Capacity		SECOND CLASS 95	Time Table No. 92 Effective May 22, 1960 PACIFIC TIME STATIONS	Telegraph and Telephone Calls	Distance from Spokane	SIGNS	SECOND CLASS 96
	Sidings	Other Tracks						
SBO	L 8.00AmSPOKANE.....	DS	0.00	DNKORY XZVB	A 5.20Pm
SC 2	0	117	1.86 ^{1.86} N.P. CROSSING.....		1.86	VM	
SC 5	0	4	8.15 ^{2.54} PARKWATER.....		4.40		5.01
SC 6	27	0	8.20 ^{1.42} ORCHARD AVE.....		5.82		4.55
SC 7	0	9	8.25 ^{1.16} MILLWOOD.....		6.98	X	4.50
SC 13-B	0	20	9.10 ^{6.06} GREENACRES.....		13.04		4.30
SC 19	18	0	A 9.30Am ^{5.25} SPOKANE BRIDGE.....		18.29	V	L 4.10Pm
BETWEEN SPOKANE BRIDGE AND GIBBS C. M. ST. P. & P. RY. TIME TABLE AND SPECIAL INSTRUCTIONS WILL GOVERN.								
SD 31	0	57	L 10.30AmGIBBS.....		30.52	VZX XRXDY PVZW	A 3.00Pm
SC 32	A 10.50Am ^{1.45} COEUR d'ALENE.....	CA	31.97		L 2.50Pm
			2.50 11.28	Time Over Subdivision Average Speed Per Hour				3.30 9.13

Westward trains are superior to eastward trains of the same class.

WESTWARD EIGHTH SUBDIVISION EASTWARD

Station Numbers	Car Capacity		Time Table No. 92 Effective May 22, 1960 PACIFIC TIME	Distance from Spokane	Telegraph Calls	SIGNS
	Sidings	Other Tracks				
STATIONS						
SB 90	42 MOSCOW	96.05	MO	BRKDYXVW
			7.88			
SB 82	0	18 VIOLA	88.17
			6.60			
SB 76	9	105 PALOUSE	81.57	PA	DYV
			4.92			
SB 71	0	10 GRINNELL	76.65
			1.93			
SB 69	0	11 LADOW	74.72
			3.72			
..... N. P. & U. P. R. R. CROSSINGS	71.00	M
			0.36			
SB 65	16	22 GARFIELD	70.44	GP	DW
			4.06			
SB 61	0	9 CRABTREE	66.58
			3.48			
SB 57	0	18 SOKULK	63.10
			3.60			
..... N. P. R. R. CROSSING	59.50	M
			0.04			
..... U. P. R. R. CROSSING	59.46	M
			0.62			
SB 53	11	57 OAKESDALE	58.84	KA	DY
			3.22			
SB 50	0	13 GEARY	55.62
			4.66			
SB 45	0	20 FAIRBANKS	50.96
			5.25			
SB 40	25	31 SPRING VALLEY	45.71	XYOJ
			5.98			
SB 34	40 WAVERLY	39.73
			2.94			
SB 30	0	0 WEST FAIRFIELD	36.79
			2.60			
..... U. P. R. R. JUNCTION	34.19	V
			32.33			

BETWEEN U. P. R. R. JCT. AND N. P. CROSSING
U. P. R. R. TIME TABLE AND SPECIAL INSTRUCTIONS WILL GOVERN.

SC 2	0	117 N. P. CROSSING	1.86	VM
			1.86			

OPERATION BETWEEN N. P. CROSSING AND SPOKANE IS OVER SEVENTH SUBDIVISION.

SB 0 SPOKANE ..★.....	0.00	DS	DNKORYX ZVBW
------	-------	-------	------------------------	------	----	-----------------

Time Over Subdivision
Average Speed Per Hour

Westward trains are superior to eastward trains of the same class.

WESTWARD NINTH SUBDIVISION EASTWARD

Station Numbers	Car Capacity		Time Table No. 92 Effective May 22, 1960 PACIFIC TIME	Distance from Spring Valley	Telegraph Calls	SIGNS
	Sidings	Other Tracks				
STATIONS						
W77	40 COLFAX	36.74	CO	YXKDW
			12.17			
W65	30	25 STEPTOE	24.57
			5.00			
W60	0	29 CASHUP	19.57
			4.21			
W35	0	28 THORNTON	15.36
			9.59			
W46	10	29 ROSALIA	5.77	RO	DVW
			5.77			
SB 40	25	31 SPRING VALLEY	0.00	JXRYO
Time Over Subdivision Average Speed Per Hour						

Westward trains are superior to eastward trains of the same class.

SEE ADDITIONAL SPECIAL INSTRUCTIONS PAGES 6 THROUGH 12.

SPEED TABLE

Time Min.	Per Mile Sec.	Miles Per Hour	Time Min.	Per Mile Sec.	Miles Per Hour
		46	1	18	46.2
		47	1	20	45.0
		48	1	22	43.9
		49	1	24	42.9
		50	1	26	41.9
		51	1	28	40.9
		52	1	30	40.0
		53	1	33	38.7
		54	1	36	37.5
		55	1	39	36.4
		56	1	42	35.3
		57	1	45	34.3
		58	1	50	32.7
		59	1	55	31.3
1	0	60.0	2	—	30.0
1	1	59.0	2	10	27.7
1	2	58.1	2	20	25.7
1	3	57.1	2	30	24.0
1	4	56.3	2	40	22.5
1	5	55.4	3	—	20.0
1	6	54.5	3	30	17.1
1	7	53.7	4	—	15.0
1	8	52.9	5	—	12.0
1	9	52.2	6	—	10.0
1	10	51.4	7	—	8.6
1	12	50.0	8	—	7.5
1	14	48.6	9	—	6.7
1	16	47.4	10	—	6.0

WATCH INSPECTORS

Franklin P. Wheeler Kalispell
Joseph Z. Gerber Whitefish
R. C. Wickstrom Jewelry Store Bonners Ferry, Idaho
A. F. Benson Newport, Wash.
H. J. March N. 221 Washington St., Spokane, Wash.

SPECIAL INSTRUCTIONS

ALL SUBDIVISIONS

1. SPEED RESTRICTIONS GENERAL.

The following speed limits apply to trains and engines operating under the conditions outlined, unless rules or conditions require a further reduction.

50 MPH—Diesel engines light or with caboose only.

35 MPH—Trains or engines on main routes, actuating the points of spring switches: Trains or engines thru No. 20 turnouts at following locations:

Ends of double track.

East and west siding switches at:

Browning	Ripley	Naples
Triple Divide	Kootenai Falls	Colburn
Belton	Troy	Sandpoint
Stonehill	Yakt	LaClede
Ural	Leonia	Scotia
Volcour		

East switch eastward siding Essex.

East siding switch Vista, Fortine.

West siding switch Rising Wolf, Libby, Newport.

West yard lead switch Whitefish.

SP&S Junction switch Fort Wright.

30 MPH—On Main lines, when handling following equipment in trains, not in actual service but on own wheels: derricks, cranes, pile drivers, Jordan spreaders, shovels, wedge plows, scale test car, also ore cars series 30000 thru 94250 and air dump cars X-2000 thru X-2096, X-7000 thru X-7049 when such cars are loaded with ore or gravel.

25 MPH—Trains handling logs; Trains or engines moving in facing point direction at spring switches without facing point lock; Trains or engines thru No. 15 turnouts at following locations:

East and west siding switches at Stryker, Elmira.

West siding switch tobacco.

20 MPH—Train handling the following equipment on Branch Lines or on 6 degree or sharper curves of Main Lines: scale test car, ore cars series 30000 thru 94250, air dump cars X-2000 thru X-2096, X-7000 thru X-7049 when such cars are loaded with ore or gravel.

15 MPH—Trains handling the following equipment on Branch Lines or on 6 degree or sharper curves of Main Lines: derricks, cranes, pile drivers, Jordan spreaders, shovels and wedge plows.

15 MPH—Trains or engines moving thru interlockings against the current of traffic on double track; Trains or engines thru all other turnouts, except equilateral turnouts, and those shown previously in this item.

1(a). Rule 240 W of the Consolidated Code of Operating Rules is modified to permit handling Great Northern cars 60276 through 60279, 61500 through 61524 and 61000 through 61009 in passenger trains at passenger train speeds.

2. MOVEMENT OF ENGINES DEAD IN TRAINS.

Engine 2350 must be handled on rear of train.

Single unit diesel engines moving dead in freight trains are to be handled not less than (5) cars, or more than (15) cars from road engine. Additional units are to be separated by not less than (5) cars. Multiple unit groups, not exceeding (4) units, all equipped with alignment control couplers moving dead in freight trains, are to be handled not less than (5) cars from road engine. Additional groups or single units are to be separated by not less than (5) cars.

Following speed restrictions must be observed when towing engines dead in trains.

MAXIMUM SPEED

ENGINE NUMBER

50 MPH.....1 thru 12, 14, 15, 16, 24 thru 28, 75 thru 170.

79 MPH.....260, 261, 266 thru 270, 275, 280, 281, 350 thru 365, 500 thru 512, 679, 680.

65 MPH.....All other engine units not shown above.

3. Except at points where it is necessary to classify trains, open cars loaded with poles, piling, lumber, timber, pipe, or other lading which might shift, should be placed as close as possible to the head end of train, but not next to engine, caboose, occupied outfit car or passenger car. Loaded trailer-on-flat cars are not included in this category. In double track territory, trains handling such cars must use extreme care to avoid slack running in or out when passing or being passed by other trains. In single track territory, trains handling such cars must be at stop when on siding or other track to meet or be passed by other trains, except when have more cars than siding will hold, it is permissible for such trains to pull by each other at restricted speed.

Loaded dump cars should not be handled on double track after dark, but if necessary to do so, close watch must be maintained by members of the crew, and if a car dumps its load, train must be stopped at once and protection provided as prescribed by the rules.

3 (a). Trains handling flat or skeleton cars loaded with logs will not exceed 10 MPH passing over through-truss bridges, or through tunnels. Thorough inspection of all cars of logs in train must be made at appropriate locations when train is stopped for meeting trains and other purposes, making certain train and lading are in safe condition before proceeding. Extra stops enroute will be made for this purpose when in the judgment of the Conductor it is necessary. Members of the crew must maintain a watch for logs that may have rolled off cars and if a track is fouled, take prompt action to protect trains.

On double track, Conductors must notify train dispatcher when logs are to be handled and the log train must be at stop when being passed by other trains, except when both trains are handling logs, either one should be at stop until the other train pulls by, whether on siding or double track.

On single track, trains handling logs must be at stop when meeting or being passed by other trains, except when there are more cars than siding will hold, it is permissible for log train to pull by other train at restricted speed.

In double track territory, logs must be secured to cars by chains or cables.

4. Brakemen with less than one year of experience should not be used as flagmen except in emergency, and then Superintendent will be notified by wire.

5. When operating snow machines in non-block signal territory, no train should be permitted to follow closer than a station apart, when that cannot be done, they will be blocked not less than thirty minutes apart.

After severe blizzard or dirt storm, employes on first train over road must exercise care to avoid accident caused by striking drift without first having drifts faced with hand shovels, cutting in far enough to get beyond the hard snow and giving a perpendicular wall to strike against instead of slope or wedgelike shape. When operating snow dozer, conductor in charge will ride in dozer. On snow and dirt dozers every precaution must be taken to see that cage, flangers and wings clear all obstacles when in service and are properly secured when in through trains, and dozers properly turned. Hand screws must be tightened to raise flangers on dozers as high as possible before making a back-up movement, and must not be released until the dozing work is actually to start. Hand screws holding the cage on dozers must be tightened or chains otherwise fastened except when dozer has air in cylinders and is attended by an employe.

6. Due to limited overhead clearance at tunnels and structures, employes are warned to keep off top of cars of extreme height and width when handled in trains and yards, except in emergency. In absence of previous advice on such cars, wire proper officer for instructions.

7. Placarded loaded tank cars handled in through freight or mixed trains shall not be nearer than 6th car from engine, occupied caboose or passenger car.

Cars placarded "Explosives", "Flammable", "Corrosive Liquids", or "Poison Gas" handled in through freight trains, local and mixed trains, shall not be nearer than 16th car from engine, occupied caboose or passenger car.

When length of train will not permit handling of cars as prescribed above—ANY PLACARDED CAR, loaded with above commodities—shall be placed near middle of train, but not nearer than 2nd car from engine, occupied caboose or passenger car.

When switching such cars in terminal yards they must be separated from engine by at least one non-placarded car.

When placarded cars described above are handled in freight trains made up in "blocks" or classifications, placarded car or cars shall be placed near middle of the "block" or classification, but not nearer than 6th car from engine, occupied caboose or passenger car.

When such placarded cars are placed in trains they must not be placed next to each other, next to refrigerators equipped with gas-burning heaters, stoves or lanterns, or next to loaded flat cars, or gondola cars containing lading higher than ends of car that is liable to shift.

Carload express shipments of explosives, sealed and placarded may be handled on passenger trains; LCL shipments may be made in so-called peddler car with messenger in charge when such car is assigned to the handling of express and baggage exclusively.

Terminal or pick-up points enroute must furnish conductor and engineer Form 250 showing consecutively location in train of all cars placarded "Explosives". At points other than terminals where crews change, notice will be transferred from crew to crew.

Employes will be guided by further instructions governing handling of loaded tank cars, Explosives, Flammables, Corrosive Liquids, and Poison Gas found in I. C. C. Regulations and Consolidated Code Rules 727 and 811.

8. Trains departing from stations, either from siding or main track, in trailing point movement actuating points of spring switches, a member of crew must observe indication of governing signal in opposite direction after rear end of train has passed through switch to ascertain if switch points return to normal position. If this signal indicates Stop and no immediate train movement or other cause is evident, report the fact to Superintendent from first available point of communication.

During and immediately following snowstorms or violent wind storms, spring switches must be operated by hand and relined to normal position before heading out through switch in trailing point movement, actuating switch points, to insure switch is in proper operating condition.

9. Facing point locks on hand operated switches are indicated by a six-inch yellow stripe painted on target staff. Be positive locking device is restored to normal position after using. A running switch must not be made through this type switch.

10. The following Uniform Code of Operating Rules are in effect in Canada.

Rule 14. (k-a) o o —

Answer to 14k

Rule 98. Trains or engines must approach the end of double, three or more tracks, junctions, interlocked railway crossings at grade and interlocked drawbridges prepared to stop unless the switches are properly lined, signals indicate proceed and track is clear.

Trains or engines must stop at the stop signs at non-interlocked railway crossings at grade and at non-interlocked drawbridges and not proceed until the proper signal has been given for that purpose.

When clear signals are given at interlocked railway crossings at grade, unless otherwise provided, the speed of any train must not exceed thirty-five miles per hour until the entire train has passed the crossing.

When clear signals are given at interlocked drawbridges the speed of a passenger train must not exceed twenty-five miles per hour, and of any other train or engine fifteen miles per hour, until the entire train has passed the drawbridge.

Rule 99. When a train is moving under circumstances in which it may be overtaken by another train, lighted fusees must be dropped off at proper intervals and such other action taken as may be necessary to ensure full protection.

When a train stops under circumstances in which it may be overtaken by another train, a flagman must go back immediately with flagman's signals a sufficient distance to ensure full protection, at least:

In day time, if there is no down grade toward train within one mile of its rear and there is a clear view of its rear of 2000 yards from an approaching train1000 yards;

At other times and places, if there is no down grade toward train within one mile of its rear....1500 yards;

If there is a down grade toward train within one mile of its rear2000 yards;

When a train stops under circumstances in which it may be overtaken by another train the engineman will immediately signal the flagman to protect the rear. When ready to proceed he will recall the flagman.

The flagman must, after going back a sufficient distance from the train to ensure full protection, take up a position where there will be an unobstructed view of him from an approaching train of, if possible, 500 yards, first placing torpedoes not more than 100 nor less than 50 yards apart to cause two explosions at least 200 yards beyond such position and, when necessary, in addition, displaying lighted fusees, and must not return until recalled or relieved and safety of the train will permit. If necessary to go beyond the required distance he will leave the torpedoes at the required distance as an indication of the location of his train, but must, under such conditions, also place torpedoes at the point at which an approaching train is flagged.

If recalled before another train arrives he must, in addition to the torpedoes, leave a fusee burning red at the point from which he returns and while returning to his train a fusee burning red must be placed at such points or times as may be necessary to ensure full protection. When curvature, weather or other conditions require, or when snow plows or flangers may be running, extra precaution must be taken.

To maintain the proper interval between trains a fusee burning red must be left by the protected train at the point from which it moves.

Flagman must always on the approach of a train display stop signals.

The front of a train must be protected in the same manner when necessary.

Flagmen must each be equipped for day time with

A red flag on a staff,
At least eight torpedoes and
Five red fusees; and

For night time and when weather or other conditions obscure day signals,

A red light,
A white light,
A supply of matches,
At least eight torpedoes and
Five red fusees.

A train should not stop between stations at a place where the view from following trains is obstructed if it can be avoided. Conductors and enginemen are responsible for the protection of their trains.

PROTECTION OF IMPASSABLE OR SLOW TRACK

40. (a) Before undertaking any work which may render the main track unsafe for movements at normal speed, or if rendered unsafe from any cause, trackmen, bridgemen, or other employees must provide protection by sending out a flagman with flagman's signals in each direction at least 2000 yards from the defective or working point.

(b) After going out the required distance, flagman must take up a position where there will be a clear view of him from an approaching train of, if possible, 500 yards, first placing torpedoes not more than 100 nor less than 50 yards apart to cause two explosions at least 200 yards beyond such position.

(c) Flagman must not return until recalled or relieved

(d) If necessary to go beyond the required distance, flagman will leave the torpedoes at the required distance, but under such conditions must also place torpedoes at the point at which an approaching train is flagged

(e) On the approach of a train flagman must display stop signals, using lighted fuses at night or in obscure weather.

(f) Trains stopped by a flagman will be governed by his instructions, and on reaching the defective or working point will there be governed by instructions of the foreman in charge.

(g) Flagman must each be equipped for day time with

- A red flag on a staff,
- At least eight torpedoes and
- Five red fuses; and

For night time and when weather or other conditions obscure day signals

- A red light,
- A white light,
- A supply of matches,
- At least eight torpedoes and
- Five red fuses.

41. On subdivisions or portions thereof specified in the time table or special instructions, rule 40 may be modified as follows:

(a) By day place a red flag and, in addition, by night a red light between the rails 200 yards in each direction from the defective or working point, and place torpedoes on each rail to cause one explosion 200 yards beyond the red signals, also:

(b) By day place a yellow over red flag and, in addition, by night a yellow light and a red light at least 2000 yards in each direction from the defective or working point on the same side of the track as the engineman of an approaching train, and place torpedoes not more than 100 nor less than 50 yards apart to cause two explosions 200 yards beyond these signals.

(c) Train approaching the signals prescribed by clause (b) must stop, replace the torpedoes and proceed to the red signal prescribed by clause (a) and there be governed by instructions of the foreman in charge, and must not proceed until the red signal has been removed by the foreman.

(d) When weather or other conditions obscure day signals night signals must be used in addition.

42. When the main track is impassable, and after train order protection has been provided and the foreman so advised, rules 40 and 41 may be modified as follows:

(a) By day place a red flag and, in addition, by night a red light between the rails 200 yards in each direction from the defective or working point, also:

(b) By day place a yellow flag and, in addition, by night a yellow light at least 2000 yards in each direction from the defective or working point on the same side of the track as the engineman of an approaching train, where there is a clear view of the signal of, if possible, 500 yards.

(c) Trains stopped by the red signal prescribed by clause (a) must be governed by instructions of the foreman in charge, and must not proceed until the red signal has been removed by the foreman.

(d) When weather or other conditions obscure day signals night signals must be used in addition.

43. When the nature of the defect does not require stop to be made, and after speed restriction has been placed by train order and the foreman so advised, rules 40 and 41 may be modified as follows:

(a) By day place a yellow flag and, in addition, by night a yellow light at least 2000 yards in each direction from the defective point on the same side of the track as the engineman of an approaching train, also:

(b) By day place a green flag and, in addition, by night a green light in each direction immediately beyond the defective point.

(c) Trains must reduce speed to comply with requirements of the train order, and must not increase speed until the entire train has passed the green signal.

(d) When weather or other conditions obscure day signals night signals must be used in addition.

44. On subdivisions or portions thereof specified in the time table or special instructions, when the main track is found to be unsafe for movements at normal speed but safe for speed of ten miles per hour or more, rule 41 may be modified as follows:

(a) By day place a yellow flag and, in addition, by night a yellow light 200 yards in each direction from the defective point on the same side of the track as the engineman of an approaching train, also:

(b) By day place a yellow over red flag and, in addition, by night a yellow light and a red light at least 2000 yards in each direction from the defective point on the same side of the track as the engineman of an approaching train, and place torpedoes not more than 100 nor less than 50 yards apart to cause two explosions 200 yards beyond these signals, also:

(c) By day place a green flag and, in addition, by night a green light in each direction immediately beyond the defective point.

(d) Trains must stop and replace torpedoes on each side of the defective point, and must reduce speed to ten miles per hour before passing the yellow signal and must not increase speed until the entire train has passed the green signal.

(e) When weather or other conditions obscure day signals night signals must be used in addition.

(f) The foreman must report the condition to the train dispatcher as soon as practicable, and when advised that speed restriction has been placed by train order must mark the defective point as prescribed by rule 43.

45. In providing protection each main track must be regarded as a track upon which trains may run in either direction. Where two main tracks are on the same roadbed, flags and lights required to be placed on the same side of the track as the engineman of an approaching train under rules 41-44 inclusive must be placed to the outside of the track affected and not between the two main tracks. Under this rule, when the two main tracks on the same roadbed are for single track operation their location will be shown in the time table.

46. When flags or lights are placed as set forth in rules 41-45 inclusive they will be mounted on staffs and elevated so as to be clearly in view of the engineman of an approaching train.

47. Where the use of torpedoes is required, duplicates should be placed on the opposite rail to explode simultaneously.

48. Torpedoes must not be placed near stations nor on public crossings at grade.

49. A sign bearing figures indicating permissible speeds, or the word SLOW, placed at the side of the track will indicate a permanent slow order; its location and speeds permitted will be specified in the time table or special instructions.

FIRST SUBDIVISION

(Main Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Cut Bank and Troy	79 MPH	50 MPH

2. SPEED RESTRICTIONS.

Cut Bank, Bridge 1090.8	30 MPH
Columbia Falls.....Trains 31 and 32 passing station....	45 MPH

3. TRAIN REGISTER EXCEPTIONS.

Cut Bank, first class trains and passenger extras register by ticket.

Register of regular trains at Cut Bank will cover their arrival at Blackfoot.

Register of regular trains at Whitefish will cover their arrival at Conkelley.

Troy, First class trains and passenger extras register by ticket.

4. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

All trains require clearance Form A at Whitefish. Such clearance will confer the same authority as though received at initial station.

5. On arrival at Essex, eastward freight trains requiring helper engine assistance will come to a stop and make full application of air brakes and leave applied until proceed signal received from helper engine. Helper engine will be coupled against rear of caboose and immediately make back up movement to ascertain positive coupling.

6. Summit, westward freight trains will pull rear end of train clear of end of double track to avoid delay to eastward trains.

On arrival at Summit, eastward freight trains with helper engine assistance behind caboose must come to a stop clear of the end of double track. Under no circumstances whatsoever will anyone be allowed to ride in the caboose within the limits of helper territory while helper engine is shoving against the rear of train. Train crew must ride in rear cab of helper engine, using rear headlight for center of track inspection when necessary.

7. When outfit cars or passenger equipment or TTX and STTX trailer flat cars are handled on rear of freight trains or when stockmen, messengers, etc., are carried in the caboose, helper engines must be cut into train.

8. CROSSOVERS ON DOUBLE TRACK.

FACING POINT	TRAILING POINT
Cut Bank	Sundance
Summit	MP 1110
Blacktail	Essex, east crossover
Singleshot	Columbia Falls, west crossover
Essex, west crossover	Half Moon
Columbia Falls, east crossover	

9. Trego, do not spot cars within 300 feet of public crossing.

10. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Cut Bank—end of double track east and west end Bridge 1090.8.	
Summit	End of Double track.
	East switch westward siding.

Switch at end of double track and westward siding above points controlled by operator at depot.

When a yellow indication (normally dark) is displayed below two red indications on the governing home signal, it insures route is lined and locked and confers authority (AFTER STOPPING) to pass through Interlocking Limits at restricted speed, then proceed in accordance with train rights and operating rules expecting to find track occupied beyond Interlocking Limits.

Tobacco	West siding switch
Controlled by operator at Eureka.	

11. AUTOMATIC INTERLOCKINGS.

Nimrod	Single Track Bridge 1165.8.
Pinnacle	Single Track MP 1173.2 to 1177.6
Red Eagle	End of double track.
Conkelley	End of double track.
Whitefish	End of double track.

Nimrod and Pinnacle:

Trains or engines stopped by a stop indication at entrance to Pinnacle interlocking will be governed by Rule 509.

Westward trains at Nimrod may hold interlocking for a period of six minutes by operating push button at westward home signal.

Trains and engines approaching interlocking holding instructions requiring them to wait to permit other trains or engines to move through interlocking will stop before passing "Approach Control Nimrod" and "Approach Control Pinnacle" sign for track they occupy and wait until their train rights permit them to proceed.

At eastward and westward home signals a switch key controller fastened to the side of the instrument house near the home signals and a third switch key controller placed in the depot at inspection point for westward trains just east of interlocking, to assist in moving trains when home signal displays Stop-indication account plugs in slide fence pulled out. When trains or engines receive a Stop-indication at home signal and no conflicting train movement is evident, trainmen should operate key controller by inserting switch key in controller and turning clockwise toward R, holding in that position for a few seconds. If home signal clears after operating key controller, train may proceed through interlocking at restricted speed, looking out for rocks or other obstructions fouling track. If home signal does not clear by operation of key controller, train must be governed by train rights, Interlocking Rules and Special Instructions stated above.

A work train key controller, so marked, is located on side of instrument house at west end of interlocking. Work train occupying eastward approach track can release interlocking for other train movements by inserting switch-key in controller and turning clockwise toward R, holding key in that position for a few seconds. To clear home signal again for work train movement to single track, key controller must be operated counter-clockwise toward N.

Indicator consisting of a red banner on white background in a cast iron case marked "Trainmen's Indicator", and fastened to the west cantilever mast at Nimrod Interlocker.

The red banner, normally vertical, will change to horizontal position to indicate approach of eastward train on eastward track when train is 8000 ft. west of cantilever mast.

Pinnacle, signals located to left of track to govern movements against current of traffic to single track at each end of interlocking.

12. Double track extends between Summit and Red Eagle except Nimrod and Pinnacle single track interlockings.

13. CONDITIONAL PASSENGER STOPS.

No. 31 Cut Bank to discharge revenue passengers from Williston and east and to pick up passengers for Spokane and west where No. 31 is scheduled to stop.

No. 32 Cut Bank to discharge revenue passengers from Spokane and west and to pick up passengers for Williston and east where No. 32 is scheduled to stop.

No. 27 Glacier Park and Belton to pick up revenue passengers for Spokane and west, where No. 27 scheduled to stop and to discharge revenue passengers from Havre and east.

No. 28 Glacier Park and Belton to discharge revenue passengers from Spokane and west and to pick up revenue passengers for Havre and points east where No. 28 scheduled to stop.

SECOND SUBDIVISION

(Main Line)

1. MAXIMUM PERMISSIBLE SPEED FOR TRAINS.

Between	Passenger	Freight
Troy and Fort Wright	79 MPH	50 MPH

2. SPEED RESTRICTIONS.

Between Albeni Falls Spur and Diamond Match Mill.....	10 MPH
Newport, passenger trains through station limits.....	45 MPH
Mead, over switches and frogs on curves Aluminum Plant	5 MPH
Spokane, all trains approach crossover east of bridge 270, and crossover west of Howard Street at restricted speed.	
Spokane, public crossing Howard Street	12 MPH
other public crossings	20 MPH

3. TRAIN REGISTER EXCEPTIONS.

Ft. Wright second subdivision trains will register by ticket.

Spokane, first class trains and trains originating or terminating at passenger station will register and receive clearance.

Hillyard, First class trains and passenger extras register by ticket.

Register of regular trains at Hillyard will cover their arrival at Dean.

Troy, First class trains and passenger extras register by ticket.

4. Rules 251, 251(A), 253 and 254 apply on Eastward and Westward tracks between Fort Wright and Dean for movements with the current of traffic.

Trains (Except First Class trains and Passenger Extras) must not enter main track between these points unless given a proceed signal at an interlocking or until permission is received from operator or train dispatcher. At Dean, a proceed indication on Eastward home signal at end of double track will confer authority to Eastward inferior trains to run ahead of Eastward superior trains to station Dean.

5. CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).

Spokane, clearance issued and signed by the Superintendent will confer the same authority to a first class train as though received at its initial station.

Dean, Rule 83(B) does not apply if train order signal indicates proceed.

6. CROSSOVERS ON DOUBLE TRACK.

Facing point.

MP 1477.22 east of Br. 270, Spokane.

MP 1477.61 (Scissors) on Br. 273 west of Spokane passenger depot.

Trailing point.

MP 1473.14 west of Hillyard.

MP 1476 east of UP. RR. crossing, Spokane.

MP 1476.69 on Br. 269, Spokane.

MP 1477.12 east of Br. 270, Spokane.

MP 1477.61 (Scissors) on Br. 273 west of Spokane passenger depot.

MP 1478.41 west of Br. 273, Spokane.

7. MANUAL INTERLOCKING.

Fort WrightEnd of double track and SP&S Ry Jct.

Whistle signals for routes:

Main Track GN Ry1 short, 1 long.

Main Track SP&S Ry1 long, 1 short.

Siding GN Ry2 long, 1 short.

8. MANUAL INTERLOCKINGS WITH DUAL CONTROL SWITCHES.

Troywest siding switch controlled by operator at depot.

HILLYARD.....End of double track and yard lead switches east and west of yard controlled by operator in yard office.

The "home signal limits" (Rule 605) on main track extend from the westward home signals at east end of yard to eastward home signals at west end of yard.

After receiving proper signal indication and entering home signal limits at east and west end Hillyard yard, switching movements may be made between these home signals and Rule 670 will not apply.

Whistle signals for routes west end of yard:

Eastward trains,

To main track1 long, 1 short, 1 long.

To yard1 long, 1 short.

Westward trains,

To westward main track1 long.

To eastward main track2 long, 1 short.

9. AUTOMATIC INTERLOCKINGS.

U.P.R.R. crossing 1.17 miles east of Spokane.

After signal has cleared for either a GN or UP route the entry of a train or engine of the other railroad into their approach control will automatically start a predetermined time cycle of 2 to 4 minutes which at expiration will cause signal to go to stop position and after another time cycle of 2 minutes will clear signal for route on other railroad.

Push buttons located on home signals of all main track routes may be operated to obtain signal indication for a reverse movement. Push button emergency release is located near crossing and instructions are posted in box. Switch to the S.I. interchange just west of the crossing is electrically locked.

Dean.....End of double track.

10. Double track extends between Dean and Fort Wright, except at Hillyard and over bridge 274 and SP&S Jct. which is governed by interlocking signals.

11. Spokane, Trent avenue crossing protected by watchmen between hours 7:00 A.M. and 11:00 P.M. daily, outside these assigned hours a member of crew must be on ground at crossing to protect movement.
12. Spokane, City Ordinance prohibits sounding engine whistle within city limits, except to prevent accident not otherwise avoidable, or to signal an interlocking, or to communicate with a flagman.

THIRD SUBDIVISION

(Kalispell Line)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**
Between
 Columbia Falls and Somers 30 MPH
2. **SPEED RESTRICTIONS.**
 Kalispell, all trains over main street crossing..... 5 MPH

FOURTH SUBDIVISION

(K. V. Line)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**
Between
 Bonners Ferry and Port Hill 10 MPH
2. Diesels heavier than 250,000 pounds prohibited.
 Additional units must be separated not less than five cars.

FIFTH SUBDIVISION

(Kettle Falls-Nelson Lines)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**
Between
 Troup Jct. and Dean 30 MPH
2. **SPEED RESTRICTIONS.**
 Northport, wye tracks 8 MPH
 Dolomite, spur tracks 10 MPH
 Between Northport and Troup Jct., trains handling logs 15 MPH
 Trains handling ore between Kettle Falls and Dean..... 30 MPH
3. **CLEARANCE PROVISIONS AND EXCEPTIONS RULE 83(B).**
 Great Northern clearance received at Nelson will clear train at Troup Jct.

Kettle Falls, all trains must secure clearance.

Dean, Rule 83(B) does not apply if train order signal indicates proceed.

4. Northport-Waneta, trains will not pass International Border without permission of Customs and Immigration Inspectors.
5. Canadian Maintenance of Way Flagging Rules 41 and 44 apply between Troup Junction, B. C. and Boundary, U. S.

SIXTH SUBDIVISION

(Republic Line)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**
Between
 Kettle Falls and Republic 20 MPH
2. Laurier-Danville, trains will not pass International Border without permission of Customs and Immigration Inspectors.
3. Canadian Maintenance of Way Flagging Rules 41 and 44 apply between Laurier, Washington and Danville, Washington.

SEVENTH SUBDIVISION

(Coeur d'Alene Line)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**
Between
 Spokane and Coeur d'Alene 25 MPH
2. **SPEED RESTRICTIONS.**
 Spokane, Crestline St., UP and CMStP&P RR crossings 15 MPH
 Millwood, public crossing 4 MPH
3. **RESTRICTED CLEARANCES.**
 Bridges C 7.7, 7.8 and 7.9 3200 feet west Millwood, restricted side clearance.
 Spokane, bridges 1.3, 1.5 and 1.6 will not clear man on top or sides of cars or engines. Train and enginemen must keep off top or side of cars and engines while passing over bridges, except in emergency and then use extreme caution.
4. Coeur d'Alene, trains and engines must stop before passing over 11th Street and Mullan Avenue and 15th Street and Mullan Avenue crossings, movement must be protected by flagman on the ground at the crossing.
 Coeur d'Alene, trains and engines must stop and sound two blasts of engine whistle before proceeding over Diamond Drill Crossing.

5. Trains leaving Spokane will be cleared thru Great Northern dispatcher to Spokane Bridge and will be cleared at Spokane Telegraph office by CMStP&P RR dispatcher for movement from Spokane Bridge to Coeur d'Alene. Train leaving Coeur d'Alene will be cleared by Great Northern dispatcher for movement from Spokane Bridge to Spokane and by CMStP&P RR dispatcher at their office in Coeur d'Alene for movement from Coeur d'Alene to Spokane Bridge.

6. **MANUAL INTERLOCKINGS.**

Spokane, 0.85 miles west ofN.P. Crossing.
Whistle signal for G.N. to U.P. main track.....2 long 1 short.
Trains moving from Seventh Subdivision to U.P. R.R. tracks will be governed by dwarf signal located at base of westward two-arm interlocking home signal.

EIGHTH SUBDIVISION

(Moscow Line)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between

Spokane and Moscow 25 MPH

2. **SPEED RESTRICTIONS.**

Moscow, thru city limits 10 MPH

3. Operation between N.P. Crossing on Eighth Subdivision and U.P. R.R. Junction, 2.60 miles west of West Fairfield, is joint with U.P. R.R. and their timetable and special instructions will govern. Train movements between N.P. Crossing and Dishman will be governed by remote controlled signals located at N.P. Crossing, at east and west ends of new yard, and east end of siding at Dishman. Indications of such signals will supersede the superiority of trains between these points. When one of these remote controlled signals displays Stop-indication, member of crew must communicate with operator and be governed by his instructions in accordance with Rule 509.

Trains leaving Spokane will be cleared at Spokane Telegraph office for operation east of U.P. R.R. Junction and cleared at Dishman by U.P. R.R. dispatcher for movement Dishman to U.P. R.R. Junction, 2.60 miles west of West Fairfield. Trains leaving U.P. R.R. Junction for movement over Union Pacific line will be cleared by U.P. R.R. dispatcher at Fairfield on the U.P. R.R.

Trains will register at N.P. Crossing by ticket.
Normal position of U.P. R.R. Junction switch is for Great Northern main track.

NINTH SUBDIVISION

(Colfax Line)

1. **MAXIMUM PERMISSIBLE SPEED FOR TRAINS.**

Between

Spring Valley and Colfax 25 MPH

2. **RESTRICTED CLEARANCES.**

Colfax tunnel and bridges 71.6, 72.3 and 72.4 will not clear man on top or sides of cars and engines.

3. Colfax, use care while moving over North and Last Streets account restricted view.

4. **SEMI-AUTOMATIC INTERLOCKINGS.**




Colfax, 0.29 miles west ofUP RR crossing
Normal position is stop for Great Northern.

5. **RAILROAD CROSSING PROTECTED BY GATES.**

Thornton, 0.57 miles west ofUP RR crossing
Normal position is stop for Great Northern.

BUSINESS TRACKS NOT SHOWN AS STATIONS ON TIME TABLE

Name	Location	Capacity Cars	Switch Opens	Name	Location	Capacity Cars	Switch Opens
Subdivision No. 1				Subdivision No. 5			
Gunsight—storage track...	3.25 miles east of Sundance...	8	West	Fred Draper Lbr. Co. Spur...	1.9 miles west of Ymir.....	16	East
Meriwether—storage track...	5.97 miles east of Blackfoot...	12	East	Benton Spur.....	2.0 miles west of Meadows ...	6	West
Spotted Robe—stock tracks.	3.56 miles west of Triple Divide	60	Eastward	Ross.....	3.2 miles west of Meadows....	9	Both
Singleshot industry.....	3.08 miles west of Blacktail...	13	Track	Hearn Bros. Spur.....	0.3 mile east of Parks.....	3	East
Essex Pit.....	2.97 miles west Essex.....	50	Both	Equipment Spur.....	2.2 miles east of Columbia		
Hidden Lake—storage track.	4.49 miles west of Pinnacle...	16	East	Gardens.....	3	West	
Conkelley Pit.....	779 feet west of end of double		East	C. M. & S. Co. Spur.....	0.7 mile east of Int. Bdy. at		
Anaconda Aluminum Co.	track Conkelley.....	31	ww trk	Waneta.....	34	East	
Storage Track.....	0.73 mile west of end of double		East	West Kootenay Power &			
Union Natural Gas Co. Spur.	track Conkelley.....	114	Both	Light Co. Ldg.....	0.5 mile west of Waneta.....		
Rocky Mountain Lumber Co.	1.01 miles south of Columbia		ww trk	Hudson's Spur.....	3.3 miles west of Northport...	10	West
Spur.....	Falls.....	4	East	Kanes Spur.....	4.1 miles west of Northport...	5	West
Warland Pit (Five Tracks)...	1.25 miles south of Columbia	9	East	Cameron Spur.....	4.4 miles west of Northport...	17	East
Zonolite Siding.....	Falls.....	148	Both	Dolomite Quarry Spur.....	1.2 miles west of Marble, in-		
	1.04 miles east of Yarnell.....	49	Both	cluding trackage of Spokane-	Portland Cement Co., Pri-		
	4.8 miles east Libby (MP			Hendrix Spur.....	vate Yard.....	251	West
	1331).....			Blue Creek.....	3.4 miles east of Bossburg....	6	West
				Alloy Industry.....	3.1 miles west of Addy.....	19	Both
				Kulser's Spur.....	3.0 miles east of Chewelah....	19	Both
				North American Non	1.7 miles west of Valley.....	6	East
				Metallics Spur.....	1.9 miles west of Valley.....	4	East
				Silica Sand Co. Spur.....	1.0 mile east of Springdale....	8	West
				Loon Lake Gravel Spur.....	1.6 miles east of Loon Lake...	40	East
				Subdivision No. 6			
				Harter Lumber Co.....	1.02 miles west of West Kettle		
				Matneys Spur.....	Falls.....	10	Both
				Spokane-Portland Cement	2.72 miles west of West Kettle		
				Co. Spur.....	Falls.....	4	East
				Talisman Mining Co.....	1.3 miles east of Boyds.....	12	East
				Riverside Seed Farms Ltd.	0.7 miles east of Laurier.....	5	East
				Spur.....	3.5 miles east of Grand Forks.	2	East
				Consolidated Mining and			
				Smelting Co. Spur.....	1.1 miles east of Grand Forks.	12	West
				P. Tjebbes Spur.....	0.4 mile west of Grand Forks.	3	East
				San Poil Spur.....	1.0 mile west of Torboy.....	8	East
				Subdivision No. 7			
				Northwest Tbr. Co.....	1.2 miles west of Coeur d'Alene	16	West
				Atlas.....	2.6 miles west of Coeur d'Alene	34	Both
				Huetter—connection to N. P.			
				Railway.....	2.9 miles west of Coeur d'Alene	15	Both
				Post Falls.....	8.46 miles west of Coeur d'Alene	12	Both
				Post Falls Lumber Co.....	8.46 miles west of Coeur d'Alene	6	East
				Liberty Lake.....	2.13 miles east of Greenacres..	12	Both
				Cadders.....	1.9 miles west of Greenacres..	5	West
				Subdivision No. 8			
				Estes.....	3.22 miles west of Moscow...	15	Both
				Ringo.....	3.81 miles west of Viola.....	7	West
				Longwill.....	1.39 miles west of Sokuik...	5	East
				Seabury.....	2.39 miles west of Geary.....	11	Both
				Jefferson.....	3.49 miles west of Spring Valley	6	Both
				Mt. Hope Industrial Spur...	2.94 miles west of Waverly...		East
				Old West Fairfield.....		17	Both
				Old Mt. Hope.....		44	Both
				Vera Industrial Spur.....	4.26 miles east of Dishman...	5	East
				Includes True's Oil Spur...		3	West
				Opportunity.....		24	East
				West Apple Center.....		4	West
				Dishman.....		9	East
				Spears.....		21	West
				Subdivision No. 9			
				Manning.....	5.68 miles west of Colfax.....	6	West
				Blackwell.....	2.07 miles east of Steptoe...	16	Both
				Stoneham.....	3.12 miles west of Thornton...	5	East
				Balder.....	4.76 miles east of Rosalia...	13	Both
				Rollins.....	2.54 miles east of Spring Valley	11	East
Subdivision No. 2				Subdivision No. 3			
Katka Spur.....	6.46 miles east of Crossport...	15	East	Associated Seed Growers...	3.5 miles east of Kalispell...	6	East
Crossport Spur.....	2.0 miles east of Crossport...	15	East	Montana Saw Service Co.			
Idaho-Boyd Conlee Spur...	0.71 mile east Bonners Ferry..	36	West	Spur.....	3.3 miles east of Kalispell...	5	East
Moravia.....	4.96 miles west Bonners Ferry.	18	East	Koenig Bros. Spur.....	2.6 miles east of Kalispell...	3	West
Emerson Spur.....	0.8 mile east Colburn.....	58	West	Northwestern Lbr. Co. Spur.	1.3 miles east of Kalispell...	47	East
Dover connection to S. I. Railway	2.47 miles west of Sandpoint...			Carter Oil Co. Spur.....	1.2 miles east of Kalispell...	9	East
Albeni Falls Spur.....	2.7 miles east Newport.....	28	East	Interchange Track.....	0.3 miles west of west wye		
Penrith Spur.....	3.5 miles west Newport.....	19	East	switch, Kalispell.....	27	Both	
Pacific Northwest Alloys Spur	1352 ft. east of Depot, Newport	12	East	Forest Products Co. Spur...	On interchange track.....	6	West
Elk—storage tracks.....	2.98 miles west of Camden...	20	East	Mills Lumber Co. Spur.....	2200 feet west of west wye		
Davies Spur.....	1.9 miles east Mead.....	34	East	switch, Kalispell.....	4	East	
				Duffy Spur.....	4.1 miles west of Kalispell...	8	East
				Northwest Timber Co. Spur.	4.4 miles west of Kalispell...	25	West
				Erickson Bros. Spur.....	4.5 miles west of Kalispell...	4	East
				Subdivision No. 4			
Quarry Spur.....	1.3 miles east Bonners Ferry.	4	West	Quarry Spur.....	1.3 miles east Bonners Ferry.	4	West
Thompson Lumber Co. Spur.	1.5 miles east Bonners Ferry.	8	East	Thompson Lumber Co. Spur.	1.5 miles east Bonners Ferry.	8	East
Allen's Spur.....	4.7 miles east Bonners Ferry.	6	East	Allen's Spur.....	4.7 miles east Bonners Ferry.	6	East
Watson's Spur.....	11.5 miles east Bonners Ferry	2	West	Watson's Spur.....	11.5 miles east Bonners Ferry	2	West
DeVoignes Spur.....	13.2 miles east Bonners Ferry.	4	East	DeVoignes Spur.....	13.2 miles east Bonners Ferry.	4	East
Camp 5 Spur.....	14.1 miles east Bonners Ferry.	11	Both	Camp 5 Spur.....	14.1 miles east Bonners Ferry.	11	Both
Seelover's Spur.....	15.4 miles east Bonners Ferry.	2	East	Seelover's Spur.....	15.4 miles east Bonners Ferry.	2	East
Dehnbom Spur.....	17.5 miles east Bonners Ferry.	4	West	Dehnbom Spur.....	17.5 miles east Bonners Ferry.	4	West
Edward's Spur.....	18.5 miles east Bonners Ferry.	8	West	Edward's Spur.....	18.5 miles east Bonners Ferry.	8	West
Camp 8.....	19.7 miles east Bonners Ferry.	18	Both	Camp 8.....	19.7 miles east Bonners Ferry.	18	Both
Harper's Spur.....	21.8 miles east Bonners Ferry.	4	West	Harper's Spur.....	21.8 miles east Bonners Ferry.	4	West
Houck's Spur.....	22.2 miles east Bonners Ferry.	4	West	Houck's Spur.....	22.2 miles east Bonners Ferry.	4	West
K. V. Farm Spur.....	24.6 miles east Bonners Ferry.	5	West	K. V. Farm Spur.....	24.6 miles east Bonners Ferry.	5	West

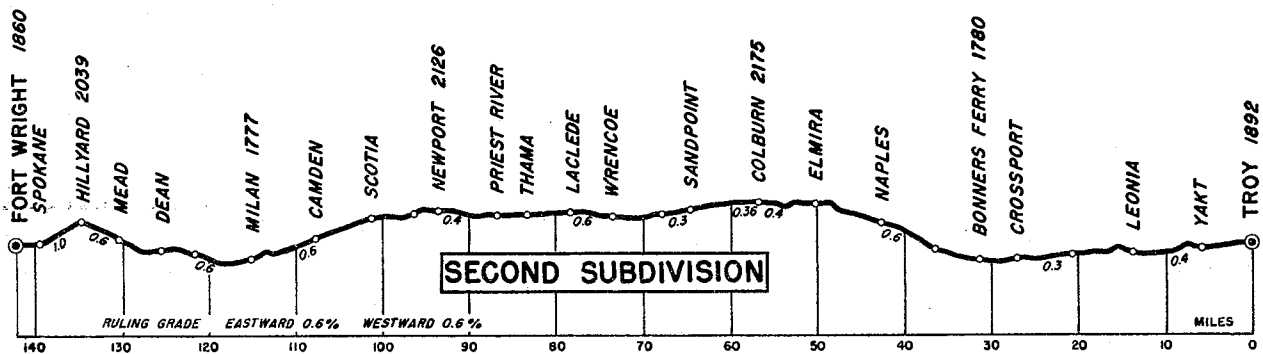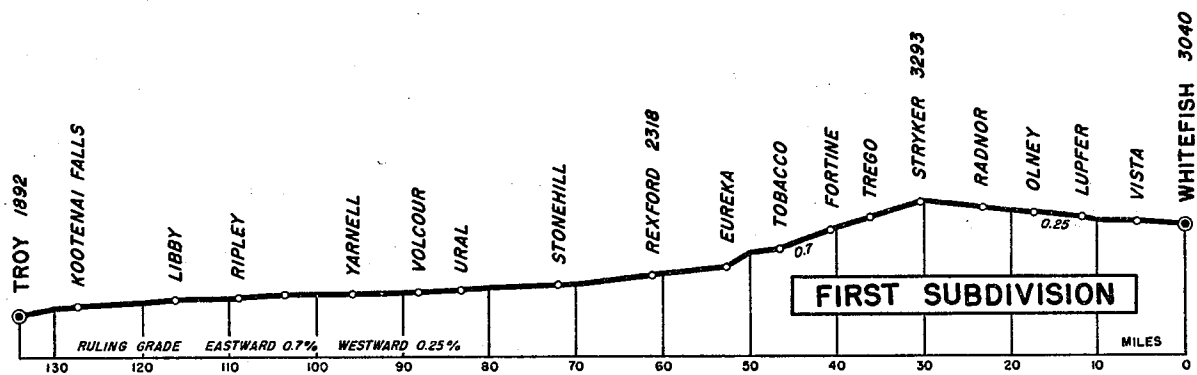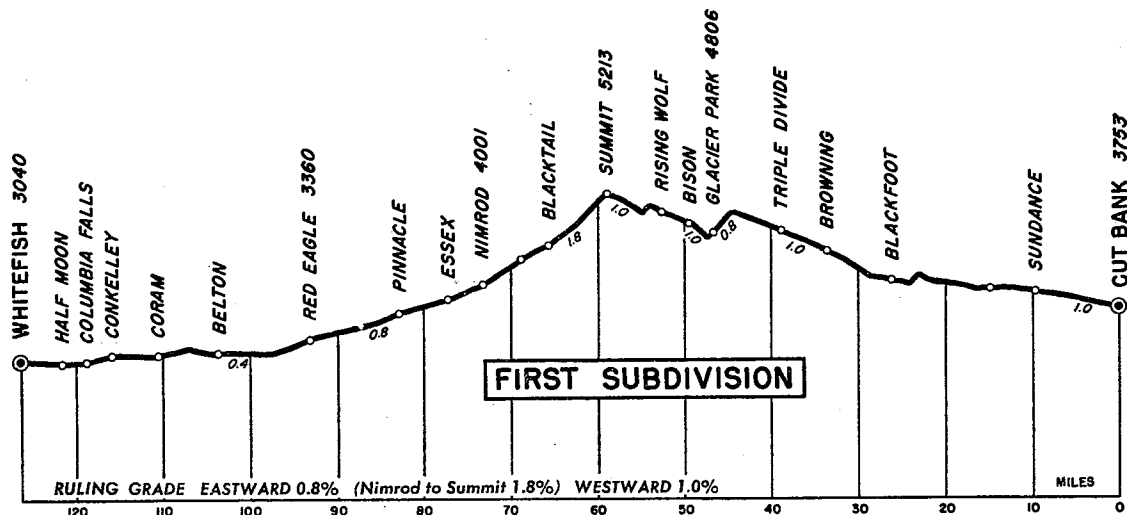

Pages 15-16 (rear covers) are blank.